

RADIO'S GREATEST MAGAZINE

CIENCE and INVENTION

RADIO REVIEW

AMAZING STORIES RADIO INTERNACIONAL



## Confidence in a Name

KNOWLEDGE derived from his own experience soon convinces the radio recruit that all radio tubes are **not** alike-no matter how similar their appearance. And from his own experience he

reaches the conclusion of millions --that the best guarantee of hidden value and unseen protection in a radio tube is in the name Cunningham with a reputation zeal-ously guarded since 1915.

1. J. Quuningham Juo.



World's Greatest Speaker Values



Static Forecasts Forest Fires, An interesting article telling how Uncle Sam's foresters have

Changes in the Polarization of Radio Waves, By Dr. Greenleaf W. Pickard.

An article on an interesting phenomenon which radio waves mission more effective for direc-

and F.C.Ryan

875 Prize Winner in the
Radio News Play Contest
"The Fugitive"
By James F. Conway
Radio Developments Shown
in Pictures 1403

in Pictures
Viewand the New SuperPower Station WJZ
WRNY For New York 1405 Visitors By Charles D. Issacson 1406

"So's Your Old Ghost!" By Marius Logan 1407 The Radio Watchman at The Gate
By Dr. K. Schuett 1408

Chargers

By A. P. Peck 1410

Round the World in a Radio-Equipped Lifeboat By A. Dinsdale 1412 Radio Set Owners Informa-

Apparatus By William J. Griffin 1414 "Quo Vadis?"
By Henry Dubois 1418 How \*o Construct the DX4
By A. K. Laing
Five Minutes of Radio for
a Nickel
By Joseph Riley

What Is Regeneration?

Ry Kenneth W. Jarvis

Shielding Radio Receivers Gains Favor By Herndon Green

Radio Wrinkles Regarding Noises By Jack Milligram

ers and the control of the control o

New York City General Advertising Dept.

Western Advertising Representati Finnean & McClure 720 Cass St., Chicago, III.

and at Dermino's, Are de L'Oberts, Paris, France. European agents: S. J. Wile Et Cie, de Place Verre, Athorers, Belgium, 1998. Send year pane, address and Holly To SUISILIEE FOR REALISION STATE Place, Now York, Mention To amount of the Control of Time hardon SYTHAMOGOMA, MARGON STORY OF A SLAKENON SYSTEM AND A STANDARD SYSTEM AND A STANDARD STORY OF A SLAKENON SYSTEM AND A STANDARD STORY OF A SLAKENON SYSTEM AND A SLAKENON SYSTEM AND A SLAKENON STANDARD STORY OF A SLAKENON STANDARD STANDA ng Representatives d Dillon Kansas City, Ma

Detroit Advertising Representative Roy Ruell, Densyan Bldg., Detroit, Mich.

New England Advectising Representative T. F. Magrane, Park Square Building, Boston, Mass.



The Crosley 4-tube—4-29 in which the Crescendon is equal to one or more additional tube of tuned radio fre-



The Crescendon
—an amazing new volume control exclusive to Crosley sets.



The Crosley 5-tube—5-38

All the volume, selectivity and purity of tone available in the best 5-tube set—plus \$\dagger 2\text{Q}\$

## Widespread Popularity Marks Another Great Success

Spectacular as has been each stride in radio achieved by Powel Crosley, Jr., never before has a Crosley success received such prompt and widespread recognition. Here in the radio plant which has made more radios than any other factory in all the world, every man and machine is going at top speed, every hour is a crowded hour, every night a working day, as the result of orders for the four new Crosley sers.

Even the sweeping success of the Crosley Musicone did not match this merciless demand upon an organization tuned to mass production. With the first demonstrations by Crosley dealers, public approval was expressed in orders that have increased in volume day by day and show no inclination to relax.

This popularity is distributed quite evenly between the four new 4- and 5-tube sets. Thousands who had formerly believed that worth while reception was exclusive to high priced sets, have found in Crosley 4-29 and 5-38 all that they could ask of radio. The accurate selectivity and pure tone of these instruments would be enough. That magnificent volume achieved through the Crossordies in the final truth

And in Crosley "RFL" types there is a revelation for all. For here true cascade amplification makes its first appearance. Here what was considered impossible in expert opinion has been achieved by amplification closely approaching theoretical receiving in the receiving medicine or the second medical processing the second medical med

What a joy to find, and in a low priced set, rare beauty, rich tone, volume subject only to your desire, and no howling at any pitch by any mishandling under any conditions. Each instrument delights the ear, fires the enthusiam of the lay technician, converts the staunchest skerptic to love of radio.

Crosley manufactures radio receiving sets which are licensed under Armstrong U. S.

THE CROSLEY RADIO CORPORATION, CINCINNATI, OHIO

Owning and Operating WLW, first remote control super-power broadcasting station in America



The Crosley 5-tube—RFL-60
A set of marvelous performance
and beautified by the
artistic decorative
hand



The Crosley 5-tube—RFL-75
Simplicity and speed in tuning, fidelity of tone and decorative beauty, enhanced by the \$75

Add 10% to all prices west of the Rockies

CROSLEY RADIO

BETTER-COSTS LESS . FOR THE ENTERTAINMENT CORNER

#### INDEX TO ADVERTISERS

	Page	Page	Page	Pag
	٨	E	Kelleradio, Inc	Richardson Radio, Inc 150
			Co1501	Process of the second
Asma Annaratus	Co1465	Economy Radio Sales Co1494	Klosper Radio Corp1472	
Aerovox Wireles	s Corp1476	Electrad, Inc		
Alden Mig. Co.	1458	Electric Specialty Co 1468	The last the same of the same	
All-American Ras	lio Corp1484	Electrical Engineers Equipment Co	The second secon	the state of the s
Allen-Bradley Co		Electrical Research Labs 1490	L	S-C Merchandising Co 14e
		Electro Thermal Co., The1495		Scientific Radio Labs
ambu Engineerin	g Institute1505	Evans & Company, Victor J 1462	Lancaster & Allwine1482	Service Battery Co
merican Electri	Co	Evans & Company, Victor J 1962		Silver-Marshall, Inc149
American Radio	Engineers1495		ST honorena	Smith, B. Hawley
Amplion, Corp. of	America, The 1508			Southern Toy Co., Inc., The147
Amseo Products,	Inc1505			Standard Radio Co
Arrow Battery Co	g. Co1498	P	M	Starrett Mfg. Co 146
Attracer Rent M	A. C.		THE RESERVE AND A	Sterling Mig. Co. The147 Super-Service Labs
500		Fahnestock Electric Co1507	Mack Laboratories1499	Sylvania Products Co 148
		Fansteel Products Co., Inc 1461	Marko Storage Battery Co1472	
	B	Ferbend Electric Co1502, 1507	Mason, Fenwick & Lawrence . 1502 Maxon, E. P	
		Fishwick Radio Co1504	Midwest Radio Co	
		Fitzpatrick, Geo. J	Miller Rubber Co. of N. Y., The 1498	T
Jakelite Corporat	ion1463 Inc1490	Freshman Company, Inc., Chas. 1491	Morison Elec. Supply Co., Inc1511 Myers Radio Tube Corp 1502	array actions
Barawile Compan	v. The, 1484,		aryers Radio Tube Corp1502	
1488 1495, 150	1, 1505, 1508, 1509			Telephone Maintenance Co 146
Barkelew Elec. ?	dig. Co., The 1472			Thomas Battery Co
delden Mig. Co.	e Mig. Co1509	G		Thordarson Electric Mig. Co., 139
			N	Tower Mig. Corp
Roles, W. B. &	I. E	G-S Radio Research Lab1502		Triangle Manufacturers 149 Twentieth Century Radio Co 146
		Gearhart-Schlueter Radio Corp. 1464	National Carbon Co., Inc1459 National Company, Inc1468	Tacinette Centre) Radio Co
Bradley Institute		Gem Tube Co	National Radio Institute1391	
Brant Battery C	01462	General Merchandising Co 1494	Niagara Metal Stamping Corp. 1464	
Bremer-Tully Mi	g. Co1470	General Radio Co	Norden-Hauck, Inc1484	U
Brownlie, Roland	nstrument Co. 1480	Golden Leutz, Inc1487		CONTROL OF
Buescher Banci I.		Gold Medal Radio1508		
		Goodrich Rubber Co., The B.F. 1470	0	Union Radio Corp
		Gould Storage Battery Co., Inc., The1497		U. S. Tool Co., Inc
			Ohio Electric & Controller Co.,	Utt-Williams Elec. Prod. Co., . 148
	C		The1490	
			Omnigraph Mfg. Co., The1503	
	1499	Н	Orr, T. V	
Cambeld Radio A	nc		Owen, Richard B 1508	V
Carborundum Co.	mpany, The1489	Hammarlund Mig. Co1501		
Carter Radio Co.	1497	Heath Radio & Electric Mig.		Viking Tool & Machine Co.,
helsea Radio Co	e of N.Y., Inc. 1481	Co1478	Notes and Charles Street, Stre	Inc
hicago Battery	Works1480	Hommel & Co., Ludwig 1476, 1490	P	TENEDO SE
hicago Elec. De	vices Co1504			
hicago Stock G	ear Works1476			
ole Radio Mig. Co	Corp1504		Parker, C. L	(V
onneway Electri	ic Labs.	I	Phenix Radio Corp1393, 1471	
	Inside Back Cover		Pilot Electric Mfg. Co., Inc1473	
Constad Co., Inc.	1392, 1506	Indiana Mfg. & Elec. Co1484	Powerola Radio Corp 1474	Wagner Radio Co 148
ovne Electrical	School1508	International Correspondence Schools	Press Company, The1464 Press Guild1464	Walbert Mfg. Co
rescent Radio S	upply Co 1489	Ivorylite Radio Panel Co1486	Prest-O-Lite Co., Inc., The1469	Western Radio Mig. Co 146
Trosley Radio Co	rp., The1387			Weston Elec. Instrument Corp. 148
Conver-Steams 3 Conningham, Inc	Ifg. Co1486			Willard Storage Battery Co. , 145
Cumpinguani, tric	Inside Front Cover			Wirt Company149 Wizard Wire Winder Co148
		J	R	World Battery Co. 1482, 1504, 150
			R	
		Jewell Electrical Instrument Co. 1478	Radiall Company	
	D			
	D			XYZ
			Radio Corp. of America., Back Cover Radiogem Corp., The1464, 1489	XYZ
Daven Radio Cor	p1498	K	Radio Corp. of America. Back Cover Radiogem Corp., The1464, 1489 Radio Parts Co	
Daven Radio Cor DeWitt LaFranc	p1498 e Co1476	K	Radio Corp. of America. Back Cover Radiogem Corp., The1464, 1489 Radio Parts Co	X-L Radio Laboratories140
Daven Radio Cor DeWitt LaFranc Distantone Radio	p1498	K  K. Electric Co	Radio Corp. of America. Back Cover Radiogem Corp., The1464, 1489 Radio Parts Co	XYZ  X.L. Radio Laboratories



## Five Tubes Single Control

DISTANTONE MODEL "C"

Here is Distantone's latest achievement, to meet the ever increasing demand for an efficient single control receiver at a moderate price. It is a product of the Dis-tantone Laboratories, internationally known for their

LIST PRICE Without Accessories

tantone Laboratories, internationally known for their ine of quality receivers. It is encased in a beautiful manual program of genuine Backitte, attractively engraved, and equipped with Marco dal. This new model is without you will be sufficiently use in radio today, a wonder for selectivity, volume and

## **Nistantone**



MODEL F - 6 Tubes - \$115. A perfect single control receiver of great volume, sensitivity, and selectivity. Mahog-any cabinet, engraved Bakelite panel.

Distantone Radio is one of the fastest selling lines in the country today, because there is a model for every purse and every model represents the biggest value that can be obtained at the price.

The line includes five tube receivers of two and three dial control, and five and six tube sets with single dial control, all of the Tuned Radio Frequency type.

Any model of the Distantone line, as pictured and described here, will bring to any home, large or small, the fullest measure of radio enjoyment.

#### Attractive Proposition to Distributors.

We ever Distantone receivers have been introduced, and they are sold throughout the world, they immediately jump to the front rank of fast sellers. We still have some unallotted territory, and have an attractive proposition for reliable and financially responsible distribu-tors and jobbers. Write for full particulars.



MODEL E - 5 Tubes - \$55 An efficient receiver of the two-dial type; to tone mahogany cabinet, sloping panel.



MODEL A-5 tubes-similar to MODEL



Model D-Single Control 6 Tubes

Here is a custom-built one-dial control receiver that is the last word in radio efficiency and beauty of cabinet. We receive continual reports of coast to coast reception. It is sensitive to the highest degree, and possesses hair-line selectivity. Its tonal quality is superb and its volume immense. In workmanship, efficiency and appearance, this is a real DeLuxe

PRICES SLIGHTLY HIGHER WEST OF DENVER

DISTANTONE RADIO, Inc., LYNBROOK, LONG ISLAND

#### RADIO NEWS READERS' BUREAU

#### Time and Postage Saver

N every issue of RADIO NEWS you undoubtedly see numerous articles advertised about which you would like to have further information. To sit down and write an individual letter to each of these respective concerns, regarding the article on which you desire information, would be quite a task.

As a special service to our readers, we will write the letters for you, thus saving your time and money.

Just write the names of the products about which you want information, and to avoid error the addresses of the manufacturers, on the coupon below and mail it to us.

If the advertiser requires any money or stamps to be sent to pay the mailing charges on his catalogue or descriptive literature, please be sure to enclose the correct amount with the coupon.

We will transmit to the various advertisers your request for information on their products.

This service will appear regularly every month on this same page in RADIO NEWS.

If there is any Manufacturer not advertising in this month's issue of RADIO NEWS, from whom you would like to receive literature, write his name, address and the product in the special section of the coupon below.

TEAR ALONG THIS LINE

	Co., Inc., 53 Park Place, Ne	ew York, N. Y.	RN-4-26
	issue of RADIO N		roduct as
DO NOT USE THE	S COUPON FOR TECHN	ICAL QUESTIONS	If Catalogue
NAME .	ADDRESS (Street — City — State	List here specific article on which you wish literature.	of complete line is want- ed, check in this column
			***************************************
Use this space if you desire info	ormation from a manufacturer w ADDRE (Street — City	whose advertisement does not appear in this SS — State)	month's issue
Your name		Dealer's name	
		Lis address	
Tour addition	I	115 8001055	



"MEN! Here's the 'dope' you've been looking for-

HOW TO GET INTO THE RADIO BUSINESS"

ost Romanic

If you're earning a penny less than \$50 a week, profession, thousands of openings-in work that easily at home, through our tested, improved methods, to take advantage of these great opportunities! Why go along at \$25 or \$35 or \$45 a week, when you can pleasantly and in a short time learn to be a Radio Expert, capable of holding the big jobs, paying \$50 to \$250 a week?

Clip Coupon for Free Book

Don't chry the other reliow who's pulling down the big cash! Our proven home-study training methods being cash our proven home-study training methods better jab, to earn employ, to, to get ready for a better jab, to earn employ end provided the provided of interesting book ever written on good things of life. Most assumpt book ever written on great field, and helmonands of interesting book ever written on great field, and helmonands of interesting book ever written on great field, and helmonands of interesting book every written on the provided and helmonands of interesting book every reliable to the provided and helmonands of interesting the provided and helmonands of the

J. E. SMITH, President
NATIONAL RADIO INSTITUTE
Dept. DW-1 WASHINGTON, D. C.

I instruments shown here and others—SIX BIG FFITS—sent to all our students free of extra cost r short-time special offer. Clip coupon now-find out bour this big unequalled offer white you still have ited—these instruments help you learn to do the sical work. Receiving sets, from simplest kind to audomate receiver. Many other big beautiful to

My Radio Training Is the Famous "Course That

Pays For Itself:

Pays For Itself:

Spare time earnings are easy in Radio when you know it the way we could you. Increase your know almost from the start of your course thru or big Free Employment Department helps you get one. Free book "Rich tearls in Radio" relia low.

iri Time Ofter

9] 6月月2月4

J. E. SMITH,

Needs Trained Men

Without obligating me in any and all information about your prac-

..... Age.....

END THIS COUPON TODAY

..... State ......



#### **Trouble Finding and Correcting** Simplified for Everyone

No matter how much or how little you know of your radio receiver, this new "Radio Trouble Finder" book is going to be a big help.

It explains the common and special faults of all the standard receivers of today; tells how to recognize instantly, by various sounds, where the trouble lies and also gives special simple tests by which you can determine what is wrong with your receiver. Then for each particular fault there is explained the proper procedure for correcting it. All troubles and their remedies are arranged in simple charts so that even the most

inexperienced radio user will have no trouble in keeping his set at all times in first class condition. All parts of the radio set are illustrated to show the layman how to proceed in correct-

THE PRICE OF THIS BIG BOOK IS ONLY 25c. Everyone can afford a copy. Keep one around the house for any emergency. Order today by using the coupon below, enclosing 25c.

Published by The E. I. Company Distributed by

The Consrad Co., Inc., 64 Church St., New York, N. Y.

CONSRAD CO., INC., 64 Church St., New York, N. Y.

Gentlemen:-I am enclosing 25c, Kindly forward at once one copy of "The

2.00 Illustrations Size

6 x 9 Inches Sold everywhere

on Newsstands and Radio Dealers

## Mr. Everyman Says:



IF I WERE BUYING A RADIO SET I'd want one with the machinery covered

Because
I'm not interested in machinery
But whatever gadjets had to show
I'd want done up pretty

I'd want to put the set in the parlor, Not in the garage.

D WANT a set that was put together to stay together,
That worked when I wanted it to work,
That was loud enough and clear enough
And didn't run amuck,
Because I haven't the time to learn
How to make it do what it wouldn't do.

A ND what is more, I'd want a set
That would run circles around my neighbor's
That would do its stuff when company was around,
That wouldn't balk at a grade,
Because

And I wouldn't own a piker's set.

T HIS set would have "Go" to it like my car And I'd be sport enough to give it a fighting chance, Because
Anything that will deliver the goods "when" and "as"
With the odds against it
Is likened to me and my fellowmen,

And if ever a set answered the voice of Mr. Everyman, It's the

## ULTRADYNE

MODEL L-3

The Ultradyne Model L-3 is a six-tube receiver employing the fundamental principles of the best circuits greatly refined and simplified. No dials no panel; just two inconspicuous levers that constitute a station selector.

The assembly lock bolts of all genuine Ultradyne Model L-3 Receivers carry Mr. R. E. Lacault's personal monogram seal.

Write for descriptive folder.

PHENIX RADIO CORPORATION
114 East 25th Street, New York City

Desirable Exclusive Territory still open for Authorized Dealers



# Here is the New THORDARSON R-200 Rued in the

Silver-Cockaday

Single Control
Receiver
described in Popular Radio, March

Price \$8 each

## A Big New Audio Frequency Transformer—Guaranteed by Thordarson

THIS big new Thordarson R-200 contains a super-size layer-wound square coil. The much larger magnetic circuit, so provided, minimizes core losses (a leading cause of distortion in powerful receivers). If your present transformers distort voices and instruments when you desire full volume, if they blur the low notes, if they are lacking in genuine musical quality, replace them with a pair of these big new Thordarson R-200's. Ideally adapted for all two-stage amplifiers.

If dealer is not yet supplied, order from us. Write for fully descriptive literature.

#### Other Thordarson Transformers

Autoformers (All Frequency Amplifiers), \$5 each. Regular Super Audio Frequency Transformers in either sub-panel or top mounting type: 2-1, \$5; 3½-1, \$4; 6-1, \$4.50. Power Amplifying Transformers, \$13 the pair. Interstage Power Amplifying Transformers, \$8. For Raytheon B-eliminators: R-195 Transformer, \$75, R-196 Choke, \$5. All Thordarson products are unconditionally guaranteed. Shipped direct upon receipt of price, if dealer cannot supply.

THORDARSON ELECTRIC MANUFACTURING CO.

\*\*Transformer specialists since 1895\*\*

WORLD'S OLDEST AND LARGEST EXCLUSIVE TRANSFORMER MAKERS 
Chicago, U.S.A.



Mat. 7

ADDII 1026

o D V Lietopon

## The DX Listener

N the whole annals of human endeavor, there has never before been a condition such as that in which most of human many now finds itself. I speak of radio broadcasting and the human transport of the strength of the strength

During the past year or so it has been asserted, rather vehemently in some quarters, that DN interning is rapidly passing out, and that people are relying upon only their local standard that people are relying upon only their local statements. While there is all internet visit local programs only. At first the man who buys a ready-made set or, of tourse, not aware of the intrincides and delights of fishing for distant stations with his set; so he will be satisfied for some time to listen in to the various local stations or other nearby

After a while, however, these begin to pall; and when his friends begin to tell him of this or that distant station which they have heard, he too will be bitten by the DX bug. Sooner of later he will fall victim to the ever-increasing ratio wander-lust: for the army of DX listeners is increasing rather than decreasing, as an unprojudiced investigation will show.

tion of a crecit or a set that is known to bring in the distance we mmediately become deluged with thousands of inquire more sensitive than their present receiver. This is not, by amens, as unusual occurrence, but is repeated continually, as formed and a continually as the sensitive than their present receiver. This is not, by an other than the continually as the continually as a sensitive than the continually as the continually as a sensitive than the continually as the continual to the contin

more frequently than is suspected.

we support the man with the investigating turn of mind, will sit before the set until the wee
hours of the morning, filling up his log book with call letter
hours of the morning, filling up his log book with call letter
hours of the morning, filling up his log book with call letter
hours of the morning that the control of the control of the placed upon the market, today, that could be guaranteed to
locality. I make book to days what could be guaranteed to
if the truth were known, most of our manufacturers are always
if the truth were known, most of our manufacturers are always
interesting the morning that the control of the control of

with fair regularity distances of 4,000 and 5,000 miles, and such sets will be built for the average customer in a not-too-distant future.

At present, DX listening must always be taken with a grain of salt. Stations that come in excellently one night may be beared the next with your whyter a whisper or not at all. The

reason is, of course, that it is not the set that is at fault, but, artacher, the wast occan of eithered disturbances which we term carther, the consideration of the considerati

From this it can be seen that the best radio set may not be able to pull in the distant stations when such natural phenomena abound.

How can these effects be overcome in the future? In severa manners. First, super-power will make it possible for the waves from a broadcast station to get through bad atmost pherics, by sheer strength. On the other hand, receiving set may be developed to a sensitivity so great that, even if the the ground. It should always be remembered that, in all radi reception, the ground-wave is as important as the wave comin through the air.

rive sets, radio reception can be had by the ground lead alone and if this is used DX reception is frequently excellent, even though with the ordinary aerial it may not be good at all. Mr. James Harris Rogers, of "underground-aerial" fame, demonstrated this sufficiently by burying his aerial underneath the was eliminated to a yery great extent.

Will be operated by the ground method entirely, without relying upon loops or aerials? This would certainly be an improvement, because the aerial and loop pick up not only nature's static, but man-made static, which escapes from electrical insulators, power houses, all sorts of electrical appliances, etc.

As I have said before, DX reception is always a more or less unknown quantity but even during the best "radio weather" as a station much nearer, say two hundred miles, will not be heard at all. Many people are constantly puzzled as to this, but there is, as a rule, a simple remedy. The aerial commonly used in such the station which you wish to receive, that station, as a rule, comes in best. If you wish to receive, that station, as a rule, comes in best. If you wish to receive, that station, as a rule, comes in best. If you wish to receive DX stations from all milled and the station which you wish to receive DX stations from all milled and "unbrella searal," which is samply a vertical mast from which single wires, thirty or forty feel long, radiate in all directions. A description of such an aerial can be found in all radio

By means of an umbrella aerial it is possible to receive equally well from all directions; although this type has the disadvantage of causing some interference, particuarly between

After all is said and done, my sympathies are entirely with the DX listener; for I can not imagine any greater thrill than that which comes to me when I listen, as I often do, to a station thousands of miles away. It is the greatest triumph yet achieved by mind over matter; and it should certainly be utilized to the utmost extent.

## The Phantom Radio Dinner

By G. C. B. ROWE

?

The dinner described in this interesting article was unique in several ways. It was the first time in history that 20,000 people have sat down to the same banquet in sixty-seven cities, where the connecting lipk was radio. Photoradiograms were also used to make the occasion more joyans.





Rice-President Charles G. Dawes and Gen. ames G. Harbord, who introduced him at the d. I. T. dinner. © Henry Miller News Service.

N every period of history there have been feasts and dimers, the fame of which has been handed down to posterity, and the period of the period

held in the Yale Bowl or any such place as that; but the diners drew up their chairs to tables in sixty-seven cities that are scattered over the United States, Cuba, Canada, England and Hawaii. The diners for the mosets Institute of Technology. In Jour of these sixty-seven cities specches were made by men prominent in public life, and heard by all the diners, by means of radio re-

When such an event as this dinner is amounced in this day and age the mind at once jump to radio. And it was infeed this wonder of modelm science that formed the wonder of modelm science that formed the day of the science of the sc

the Recorder of the Redo Composition of America, addressed the diners to America, addressed the diners of the Redo Recorder of the Recorder of

Honolulu to New York Technology Banquet Waldorf-Astoria, N. Y. Jan. 19, 1926



it was received in New York by the phoradiogram process.

tainment by some of the best talent i hattan, enjoyed by all the diners.

A PRODIGIOUS TASK

A PRODIGIOUS TASK

The seven stations that broadcast this



The above diagram shows the path travelled by the photoradiogram waves in their 5000-mile trip from Honolulu to New York City.

series of speeches were connected by landwires to the studios from the banquet rooms where speeches were made. The method of distribution is as follows: The microphone, into which the speaker talks, is connected



The illustration above shows the interior of the receiving apparatus used in the photo-radiogram process for sending pictures by means of radio. On the top shelf is the printing apparatus, underneath which are the amplifier tubes.

with a specially-balanced telephone line. It is mentioned that the telephone lines are in the mentioned that the telephone lines are save to eliminate all faire is 10 quite necessary to eliminate and fair the save telephone lines are commended and the save elements of each station that is constitution, and the program is breadcast on the wave-length of each station that is compared to the save that the save the save that th

Not alone is the selection of the long distance telephone lines to pack up the speeches than the long the long than the long than the telephone lines are hear. Before such which telephone lines are the telephone of the lines are large and the creation and providing emergency lines in many and provided and for frequency amplifiers and fifters; and these have to be milled than the large lines are the long telephone amplifiers and fifters; and these have to be milled than the large lines are the large lines are sufficient to the large lines are the large lines are the large lines are large lines and the large lines are the large lines are large lines are large lines and the large lines are large lines are large lines and the large lines are large lines are large lines are large lines and the large lines are large lines are large lines are large lines and the large lines are large li

as the transmitting end.



#### RADIO PHONOGRAPH DEMONSTRATION

A feature of the dinner that was exclu-sive to the 700 diners at the Waldorf Hotel


they were decoded and turned back into pho tographs by a special apparatus set up in the
hotel.—Here it took about twenty-five or
thirty minutes to build up each picture from
the transmitted waves, although the radio
signals for each black and white space on
the photographs were flashed through the
air in the fraction of a second.
"These photoradiograms," predicted David
"These photoradiograms," predicted David

Sarnoff, who was toastmaster at the New eration of electrical scientists may come the herendy believe it will, radio television will be able to unite you, not only, in sound but in sight. You will be able, not only to hear, but also to see the speakers in action at your far-flung dinner." dinner this method was employed as the photographs, a small portion of each letter being sent at a time. In that way it was copies of the letters, so that the hand-



received at their places at table photostat

Events such as this Phantom Radio Dinscience of radio is forging ahead. grandparents had been told, when they were



Above is shown the transmitting apparatus for the broadcasting of photographs, maps, etc.,

Greetings from

P. A. Chetton P.

President Institution Ablectrical Engineers

the daily papers, cause no undue comment. However, it must be admitted that radio is certainly bringing greater numbers of people together in close union than any other medi-

## Radio Makes Isolated Lives Happy

By Mrs. CHRISTINE FREDERICK

In this interesting article, Mrs. Frederick tells just how much radio means to those who live far from towns and even those who, though they inhabit big cities, are confined in their work to the house. Radio is indeed to those an emancipation proclamation.

tain farm! She went about her work sing

AST summer the writer was out in the country for a vacation—far up in the hills on a farm. No first-class music had ever come within a hun-No first-class theatrical entertain-

home and were out of touch with modern life, they slumped back, due to the over-powering effect of their environment, which was In the Atlantic Monthly, recently, there was ing school education. He went back to his

She was adjusted to her life; she had looked at it often-it seemed like the sword of Damocles, literally hung upon a silken thread. If the aerial failed, the young girl was pushed back upon the small resources of that backward community. If it worked, she could gather all the wonders of civilization, energize, stimulate and cheer herself for her part in the world. I have never had such a forceful, concrete illustration of what radio is to mean to the future of America; Every woman who is cut off from life and

I have travelled on the Chautauqua circuit have lectured before Farmers' Institutes ner of the country, heart breaking letters.

THE CARES OF LONELY HOMES

What has been their oft-repeated story? It has always been the same; imprisonment ing work; very little money left from necor education.



#### ment had ever been seen by those farm peo-

But out under the old gnarled apple trees, Symphony; and we heard Roxy and his gang put over a good show at the Capitol Theatre. The horny hands of the farm wo-

The daughter in that household, who had gone to a normal school for a few years, had school had given her a glimpse of. She was continuing her studies by radio. She was getting inspiration, to keep up her music cookery from the cookery talks and lessons were on it almost hourly; her contacts with the outside world were at least two or three a day, via radio.

Now mark you this: for that young we man, on that isolated farm, radio was the fore has been that, as soon as they got back

illiterate mountain folk and felt desperately

the tragedy of his situation; educated to a modern world, and yet thrust back, complete-ly cut off from that world.



"To the women radio is still more: it is a proclamation of Kadel & Herbert. of emancipation from isolation."

## Radio Happenings of the Month Illustrated

By GEORGE WALL





photographer was about to take a picture, a broadcast station using super-power, the station using super-power, flashlight powder, which exploded. The ire in his hand had picked up enough energy datact from the antenna, to set off the

At Sheffield, England, a mouse stopped transmission when it entered a microphone anchewed up a coll. At the high-powered sixtion at Daventry, England, another mouse goatuck between the main condenser plates of the transmitter and was electrocuted, stoppin





## A 23-Control DX Receiver

By SAMUEL SILVERMAN



Daily there come to the editorial office of RADIO NEWS many letters telling of record DX reception. Mr. Silverman's receiver was so unique that it was considered to be of interest to

our readers.

QUESTION that is frequently asked by the radio fan, who is a

in far distant stations?" The writer, after experimenting with a accompanying illustration gives the most consistent results. Although the number of controls seems to be excessive (in fact the antenna is one of the most important facmany types of aerials, the writer uses a single-wire, No. 14 bare copper, stranded cluding lead-in up to receiving set. Use nothing less than No. 12 copper-covered wire the better. Pull wire tightly so as not to were coming through window to receiving set with porcelain insulators. (Lead-in is at No. 1). Use No. 12 copper-covered wire for "A" and "B" battery con-nections. Soider aerial and lead-

in connection well.

Keep "A" battery fully charged and see that the "B" batteries not less than 40 volts on the 45on the 22-volt tap. See that tubes facturers of tested apparatus.

CONSTRUCTION OF THE

My receiving outfit is a homemade 14-tube super-heterodyne. The wave-length range is 160 to

ed to tune in on the stations desired. Refer-ring to the illustration, No. 2 is a wave trap fication obtained is greater than that obtransformers, the

#### DOUBLE-CIRCUIT ADJUSTMENTS

distributed capacity, with a fixed coupling to the secondary inductances. For waveto the secondary inductances. For wave-lengths of 160 to 480 meters, a small inductance is used in the secondary circuit; for 400 to 850 meters a loading inductance is brought in through the wave-change switch. super-heterodyne. This unit can also be used to convert any loop receiver over to

No. 5 is a regenerator, two stages of tuned radio frequency. When used with

14-tube, 23-control sets are not very common these days. In presenting Mr. Silverman's article we wish it to be understood that this is not a new-fangled set, but simply an aggregation of sets which were used by him for the trans-Atlantic tests. That such a scheme is prac-tical is best proven by the fact that Mr. Silverman was actually able to receive a number of trans-Atlantic unnecessary, but as a wave trap it helps to

cut out interference. No. 6 is a super-heterodyne with 1 oscillator, 2 detectors, 3

control radio set assembled by Mr. Silverman. The component parts are numbered in accordance with the text.

stations; 9 is a current supply set operat-ing from an electric light socket of 110 volts A.C., supplying "A" and "B" power for volts A.C., supplying "A" and "B" power for No. 7. No. 10 is an 180-ampere-hour storage "A" battery to supply current for the dif-"A" battery to supply cursus ferent units. In the rear of the storage "A" battery, are two heavy duty "B" batteries. No. 11 is a power loud speaker.

COVERING ALL NORTH AMERICA Following is a list of some of over 200

KRE, Berkeley, Calif. KHJ and KMTR, Los Angeles, California. KFWB and KNX, Hollywood, California.

KWSC, Pullman, Washington. WBAP, Fort Worth, Texas. WFAA, Dallas, Texas. KOA, Denver, Colorado. KOB, State College, New Mexico WNAD, Norman, Oklahoma. Fayetteville, and KTHS, Ho

iprings, Arkansas.
KFKB, Milford, Kansas.
WKAQ, Porto Rico.
PWX, Havana, Cuba.
CZE, Mexico City, Mexico.
CKY and CNRW, Winnipeg, Canada.
CNRR, Regina, CNRS, Saskatoon, and

CNRR, Regina, CNRS, Saskatoon, and CNRE, Edmonton, Canada, During the International Radio tests held in January the writer, in New York, picked up station CZE, in Mexico City, Mexico. The station had been tuned in but a few Gernsback of WRNY on his new magazine, Radio Internacional?" The writer at once

Following is a typical letter

#### MEXICO CITY ON LOUD

It may interest you to know of the results which I obtained on prevented from hearing the announcements by "bloopers," stations were on a wave-length of between 362 and 378 meters.

speaker with such volume that it could be

spearer with such volume that it could be be and 30 feet away. The announcer would say, "This is CZE, Mexico City," and then repeat "Mexico" about 10 times.

Up to last Sunday, my DX record was WOAI, San Antonio, Texas, which was also received on the speaker, about a month ago.

ROBERT L. SNYDER,

#### Music on Wheels By JOSEPH RILEY

A few years ago an efficient portable receiver was a curiosity, and a rarity as well. Today the portable idea has been extended to transmitting stations of fairly high power. The two portable transmitters described on this page are not freaks. They may be relied upon to operate fixed broadcast station on the West Coast. The other is a "radio sleuth," as well as a portable transmitter, in government service.

Fig. 3. (Above). An interior view of the radio detective car, which has proved very useful in locating power leaks and other forms of interierence, as well as in running down violators of the radio laws.

Fig. 2. At the right may be seen an interior view of the portable broadcast station, the exterior of which is shown at the bottom of the page. At the left are the battery racks. The two long panels control the generators and the transmitting tubes.

go to the star.

tion, has caused the appearance, recently, of a number of portable

hammed. If the star will not come to the broadcast station, the broadcast station will

In Figs. 1 and 2 is illustrated the portable In Figs. 1 and 2 is illustrated the portance radio broadcast station of Warner Brothers' motion picture studio and radio, KFWB, the largest of its kind built to date. The Darriment of Commerce has issued call letters 6XBR on 108 meters, 250 watts of power.

The apparatus is mounted on a Moreland

This stage of amplification is very much like that of the ordinary volume of voice which is needed to modu-The input panel uses two stages of power

potentiometer controls the volume of the input panel. A jack and plug arrangement Two microphones may be used, and a

On this panel are two volt meters, one for each generator. This enables the operator to read both generators separately, which is A fourth panel controls the entire power supply. When all switches are in the up supply. When all switches are in the up-position, the batteries are on discharge, when down all are on charge. Four hours of steady service is had from one charging of the batteries. Jelly batteries are used throughout, both for the generators and

Particular care was taken to run all wires in the truck, whether from batteries to tubes, keeps any radio frequency out of all the

Radio 6XBR was built for experimental that had been overlooked, the radio amateur and the BCL who make it a business to

listen in on the low waves.

This portable truck will be used to broadcast all sport events, musical entertainments

from those who had heard it on that wave

equipment and mounting was built at the Warner Brothers' studios, under the supervision of Frank N. Murphy, electrical engineer of the studio, and radio station KFWB.

t. 1. The portable broadcast station hown below is used in conjunction with station KFWB. It is sent to places where events of special interest are about to occur, and puts the state of the sent of

Work for New Radio Detective Car By George F. Paul

OCATING a leak in a power transspecial trip from Detroit to Charleston, Va. This leak had put all of the mission; and this fact had so influenced

This car contains all ed stations, to test examine amateur ope-

There are three for short-wave lengths down to 40 meters, one induction (Cont'd on page 1484)

height of 45 feet at the high end -25 feet at the low. The wires are brought down in a fan and top edge of the truck, being left maximum amount of coupling is used to keep the wave steady

and when extended reach the

modulator by the use



## Short-Wave Radio on the Pacific



Here are related some of the most interesting experiments and tests yet made on the wave-length of 40 meters, These tests were conducted between station FX1 in Hawaii and the yacht Kaimoloa, which was on a cruise in the Southern Pacific.



ONOLULU, the "Cross-Roads of the Pacific," famous for its ukuleles and hula-dancing girls, is now receiving prominence through its hort-wave radio.

about-wave radio.

An experiment of radio, beginning in the carry days of sparks with the development of radio, beginning in the carry days of sparks with the inter-siland the carry days of sparks with the inter-siland the carry days of sparks with the carry days of the sparks of the carry days of the sparks of the carry days of the sparks of the carry days of the carry

and the Argentine, and to a manders throughfile. The arrival of the Pacific Rete in these waters last April aroused the Signal Corps specially and the Argentine and the Signal Corps specially and the Argentine and the Signal result was station FXI. enulpped with a transmitter of the type used by Ed Wilson through his connection with the first transcontinental short-wave reets, and at that time a member of the Navai Reserve on duty

The receiver is of the Snell type, usin

The aerial system is a single wire of feet to long, suspended at an angle from an 80-foot mast, and is used in conjunction with a single-wire counterpoise of feet long. This single-wire counterpoise of feet long. This issued for 40 meters and the fifth harmonic for 20 meters. The antenna current is 2.2 mappers on 40 meters and 1.5 amperes on 20 meters in the counterpoise of the count

companying illustrations.

HALF-WAY AROUND THE WORLD
Beginning operations early in July of last
year, at first reaching amateurs on the Paeife Coast and in the Middle-West and the

to all parts of the United States, Station FX1 was heard at night by Mr. Pleas, of Johannesburg, South Africa, a distance of 12,000 miles. He reported by card that our telegraph signals were so loud as to be heard throughout the room. His receiver consists of a detector and two audio freconsists of a detector and two audio fre-

Two-way communication.
Two-way communication was established at night in August with the MacMillar Artic Expedition, 12 degrees from the North Pole. Congratulatory messages were exchanged between Governor Farrington, of the Territory of Hawaii, and Commandet

the Territory of Hawaii, and Commander MacMillan.

Last July the yacht Kaimoloa, carrying on board the owner, Medford R. Kellum, and party, of Honolulu, left that port on an extended trin into the South Service.

Mr. Kellum, cognizant of the wonderful possibilities of short-wave radio telegraphy, had placed, upon the Kenimoloa a 40-meter transmitter using two 250-watt tubes. The yacht also carries a spark transmitter operating on 600 meters. The aerial is a vertical

is six-tenths of an ampere,
TESTING RECEPTION IN THE SOUTH
SEAS
Fred Roebuck, the radio operator of the

Fred Roebuck, the radio operator of the Kaimoloa, using the call letters KPUH, has been in nightly communication with Station FXI in Honolulu on 40 meters. A great number of personal messages have been exchanged between Mr. Kellum and his friends in Honolulu, even though he was far in

the South Seas.

Reporting on the signals from FXI, he states that, at night time, at a distance of 300 to 500 miles, the usual weak signals peculiar to short waves at close range were noted. From 500 miles out until his arrival at Fanning Island, 1,100 miles from Honolulu, the signal strength increased rapidly

On several prearranged schedules two-way ansmission was effected during the day, 8:30 a.m., while the yacht was at Fanning dland. There was very little or no differace in the strength of the signals as compared in the strength of the signals as compared to the signal of the signal

Leaving Fanning Island, the yacht proded to Tongareva, or Penrhyn Island, 000 miles from Honolulu, located in lat. S, Ion. 158° W. It was observed that the nalar retained the same strength, and fiftly communication was carried on with





000000

the panel and interior views of the receiver, which is of the Snell type, used at station FX1. The various inductance coils, which are shown on each side of the set, fit in the sockets provided for them in the upper left side of the receiver's baseboard.

The photographs above and on the right are front and side views, respectively, of the transmitter of short waves at station FX1. This station works on wave-lengths of 20 and 40 meters.

Photog countery of Signal

While the yacht was sailing from Penrhyn sland to Tahiti, and also when anchored in appete Harbor, 2,300 miles from Honolulu, be results remained the same.

Special of Nationals, and the first 100 St. Ion. 109 St. On. 109 St. W. Rocheck reports FM signals as the strongest issuing from Honolulu, with practically no fading or swinging. After a cruise in the Samoan Islands, the Kainnolas will proceed to New Zealand, via Suva and the Fiji Islands. The operator expresses the opinion that there is not the expresses the opinion that there is not the be maintained with FM I throughout the remainder of this long South Pacific cruise.

"The Fugitive" - \$75.00 Prize Winner In the By JAMES F. CONWAY

FRANK, a chauffeur. AL

ten this morning? Yes, Sarah, I know he machines on the road now. Yes, I know I shouldn't be nervous, but what in the world can be detaining him? He hasn't called on the phone. Yes? Yes? Yes? I'll give up my fears, but I wish he would come home. Supper has been cold for hours. My brother Fred is coming in this evening. I expect him now. (With catch in her voice) Oh, Sarah, I do hope nothing has happened. Yes, a Happy New Year to you.

Yes, Sarah, the children are fine. I put

good-bye, Sarah.
FRED: I wish you a Happy New Year,
Alice, and to Frank and the boys. The

ALICE: A very Happy New Year to you,

Fred, I'm very glad you came. I've been very lonesome all evening. I've been waiting for Frank for the last five hours. FRED (cheerfully): Probably the crowd

knows how to take care of himself.

ALICE: I know Fred, but five hours is a

has happened to him, he hasn't called up or FRED: Oh. he was driving then? Where

did he go?

FRED: Why look at the worst side of it Brace up and enjoy the noise outside. Let's turn on the radio, and I'm sure Frank will be back here in a jiffy. The traffic has

time, that's all.

ALICE: I wish I could brace up but I have a terrible feeling of dread somehow. Es-pecially since the fortune teller told me to

Fren: I told you not to place any faith in fortune tellers. You should never pay any attention to them. I'll tune in on the radio,

Gee, that's swell music they are broadcasting tonight, isn't it? Listen to that jolly

ALICE: I can't enjoy it, my head is in a whirl. I'll go and make you some tea. FRED: Not now, Alice, thanks. Listen to the program for a while. There, the an-nouncer is on now. (Short pause). You

heard that? He says a dangerous criminal escaping with his car! All towns should be on the lookout! (Music on the radio again.) What the matter? Alice, you look

why did you go, why did-did-you- u-u-u

FRED: This is all uncalled for. There are thousands of men with machines. Why should it be Frank?

"THE FUGITIVE" will be "THE FUGITIVE" will be broadcast on Monday, March 15, at 11 p. m., from WRNY, the RADIO NEWS station in New York, as enacted by a full cast of profes-

Other winners in the RADIO NEWS Play Contest will be published in subsequent issues of this magazine and similarly broad-cast by WRNY. The first prize winner, "The Hidden Witness," was broadcast on February 15 from WRNY, where it was performed by the Radio Theatre Players.

ALICE: Oh, Oh, Oh, it must be, it must be! (Celebration louder than ever outside.) Oh, Oh, I knew it when he didn't call up,

when he did-did-didn't call me up, he-FRED: You must not allow yourself to

the names of the two men that the convict

Bailer is pretty close to Taylor at that. I guess I'd better get her some water. (Noise

ALICE (note retwenty) Oh—oh—fred, has Frank come back yet?
FEED: He'll be here soon now, sis, don't fret any more, it isn't good. Have some of the water. (Radio music plays again.)
ALICE: Oh, my boys, my boys, are they safe, are they safe.

FRED: Don't rise now, Alice, rest awhile

The boys are sleeping.

ALICE (crying): I must see them—Oh

home, she's fretting a lot. But-but-Bailer

FRED: Hope should spring eternal, against any fear.

ALICE: I'm hoping, Fred, hoping. (New FRED (exuberantly): I hear steps on the

open the door. FRED: Why, hello, Frank! Where have

ALICE (joyously): Frank, dear, I'm so FRANK: Happy New Year, Fred! I've been busy with a jailbird all evening!

ALICE: I've been so worried about you-but I'm so glad nothing happened. FRANK: I tried to call up but the line was

FRED and ALICE (simultaneously): You (Continued on page 1476)



## Radio Developments In Pictures



A SIGN OF THE TIMES
At the left is shown what is, perhaps, the only singing sign in existence, which advertises a radio company is Lima, Ohio. The case at the top of the sign encloses a lood straker, which is connected to a set lands the

NEW RADIO MAP OF THE UNITED STATES.
This map, prepared for the Radio Section of the Department of Commerce, above at a glance the broadcast sixteem of the Commerce, above at a glance the broadcast sixteem of the Commerce o

RADIO TRAIN CONTROL

This is a roadside unit, used in the system of train control pictured at the bottom of the page, to relay signals received from along the line. © Potograms





RADIO CONTROL TO ATENT POSSIBILITY OF TRAIN WRECKS
The illustration at the hower left shows by near depression which is studied to the give wheel of a bosomotive, when equipped with a new radio astrop device. Through a control density in the summer, the size. The property of the control of





## Views of the New Super-Power Station WJZ





WATER COOLER FOR VACUUM TUBES. This huge water cooler, which is capable of cooling 100 gallons of water per minute, is used for the purpose of keeping the giant vacuum tubes used in the transmitter at an operating temperature. This is necessary because the great power which is needed to operate these tubes would ruin the comparatively delicate elements in a short time.



CONTROL PANEL OF WJZ. Every part of the complicated apparatus of the transmitting station is controlled from this one panel. The man on the right is holding one of the 10 kw. power



80

## WRNY for New York Visitors

By CHARLES D. ISAACSON"





















RE you coming to New York? Then RADIO NEWS Station at the Room, velt. You will find the hotel one of the most beautiful in the country; and der the direction of Herbert Sohman. You dance to his syncopating tunes-that is if the Grill Room. But quite apart from that, please take this as your invitation to visit any time and give you any information you FOR LOVERS OF DRAMA

By the way, are you listening in every night at 7.15 to the Radio Theatre Index? Radio Theatre Index will give you the

Out-of-towners are asked, at this point, to

THE SHOPPERS' ADVISER

Another feature at WRNY that is paris the Radio Sales Analysis. Visitors to New York want to buy; they want to buy the best things that are offered. which stores to shop at, and which stores are offering the things that visitors are

GUIDE TO THE CHURCHES For those who seek religious information (Continued on page 1488)

MAURICE SCHWARTZ
The famous director of the
Yiddish Art Theatre, who
has made "The Dybbuk" Yiddish Art Theatre, who has made "The Dybbult" a dramatic success in two languages, appeared recently at WRNY in character as "The Meshulach," supported by his cast of players in a special version of this play adapted for the radio.































## "So's Your Old Ghost"

By MARIUS LOGAN

take my word for it, that was the slickest game that ever was "Is that so? Well, suppose you tell me

"Aw say, what yer tryin' to do—slip us the wise tongue? Lay off that stuff, guy, lay off it! I got nothin' to do and the whole

night to do it in. Hey, loe, make ours the This last was accompanied by a look of

nue, in the town known to the world in gen-

thirst parlor that rainy night. After my lor quarters had seemed to be lacking in

At once my mind jumped back to a simi-lar occurrence in 1918. I was then across just a bit lively. One night when

seemen, the stack door was jeted open and a head poked in with the "tin derby" cocked jauntily on one side. "Hey, Buddy, I seen your light as we was passing and thought you'd like to know

we was retirin'."
"The hell you say!"

He looked astonished-laughed-and van-

However that sentence had been a great heln-a very great help in fact. My equipment had not been working well and me sages were jammed and garbled, and I had

caught up with the retreating company. like most ten-minute eggs his shell was the

So when the door in Red Mike's opened and I recognized the same head, I said:

Pat took a long look at me and then the rest of his poorly-clad body was dragged erally shifting nervously from place to place: what learned professors of human nature

Sit down. Pat, and have one on me,' starvation just a step around the corner-

new life when he started to tell me about "the slickest game that ever was doped out."
"Well, it was this way," he began, after mine around the country for five years and not getting nowhere. I hunts up my old pal. Solly, the Egg, here in the old town. Solly was busier than I was doing nothing, so we scrapes our skulls to see if we couldn't pull

"Solly had a skirt in tow that was one knockout, believe me, boy! She sure was the was a friend of Solly's named Mat Frankel that was a classy boy with a smooth tongue

deville as a ventriloquist.
"Well, Mat and Solly had been playing with this here radio. They'd sit and fool around with the thing for hours when we sort of on the fritz, in some big radio fac-

Where did you learn so much about it. Pat?" I interrupted.
"Aw, say, I ain't no dope-head. Playing around with those birds I picked up a lot about old kid radio. But listen and pipe


and she nulled the one grand little idea.

it up like a spiritualist's dive-you know,



### The Radio Watchman at the Gate

By Dr. K. SCHUETT has prevented this by installing a radio detective, as explained in this article.





necially since the war, it has been would be certain to seize the opportunity to time and labor which would be required to do so, to make a search by hand of the en-tire working force: and mechanical processes of examination ("frisking") although such

the premises; and to determine with cer

#### THE COIL AS A DETECTIVE

constructed to enclose and support a coil of "gate-coil" shown in the diagram of the cirbroadcast stations, with their higher frequency, act upon a radio receiving set tuned

The number of oscillations per second pends upon: first, the size of the condenser "MAGNIFYING" THE CHANGE IN PITCH

The inductance of the coil can also be with the dimensions of the electrified wicketas small as one-hundredth of one per cer



In a second oscillating circuit, connected

waves tend to become equal, and it falls

tions is shown at the right, standing on the window ledge. The attendant beside it wears the two circuits as described, and notes the change of sound, if any, as each man passes. of metal, attained by the use of this appa-ratus, is astonishing. Even watches and keys (Continued on page 1493)



This illustration shows workmen passing through the "gate coil" of the radio detective, wh indicates by a change of tone in the headset if any metal is passing through the coil's field

# nternational Radio



TAPAN

Broadcasting is seizing Starting the the Right

principal of the Taisho English School, in the Tokio Broadcasting station.



Above is shown a wire designed especially for coils that have to be space-wound. With ordinary wire this is rather difficult, for it is not any wire this is rather difficult, for it is not an English firm bas used bare wire around which are wound two threads, in the manner shown above. This conductor, which may be obtained either stranded or solid, many be wound evenly on a tube with the neoper spacing due to the thread.



Electricity Control by

been granted by the Italian Government to a Miradio transmitting

connection with electric power stations, and to the engineers in charge at the different The concession, which is to run for a

of 1,000 meters for two of the installations and 1,750 meters for the others. Messages This is said to be the first installation of this kind in Italy.



A new idea in crystal detectors is shown in the accompanying illustration. In the first place, the crystal element has a flat surface, composed of a number of very number crystal element of a proper control of the surface composed of a number of very number crystal in the control of the control can be control of the con



GREAT BRITAIN

Increase of

that a recent estimate of ten million listeners to

#### Flewelling with Radio News

Radio News announces the addition and another at Chicago, where he successfully opened the Radio Show by his short-wave transmitter, linking the

Mr. Flewelling was one of the incorporators of the Radio Manufactechnical adviser to many organizareception from an automobile throughchigan. He will explain exclusively necessary and also an entirely new method of securing radio frequency amplification, whose influence upon radio development is at the present



A waterproof radio set, designed especially to lifeboats in an emergency, is shown in the above illustration. This set was shown at the Shipping and Engineering Exhibit recently held in London. Wide World Photos.



GERMANY

Street Cars Interference

The disturbance of railways is being system-

that it is not the driving current but the lighting current that is chiefly responsible.



The triple rheostat, shown in the sketch above, is designed primarily as a space-saver on the space of the sp

Another remedy, first tried at Halle, was

Berlin fifty-five tram cars have been equipped with condensers to cut down inter-



The casual reader of may be disappointed in

prospect the compliment of endeavoring to types, thousands of which are used in Ger-

with or without inductive coupling for all

AUDION PRIMARY RECEIVER

(Continued on page 1495)



## All About "A" Batteries and Chargers

By A. P. PECK, Assoc. I. R. E.



One of the low charging rate typically known as a "trickle charger," stantly used, it gives perfect results. by courtery of Fanated Products C

and were allowed to listen to the dots and "Where does the electricity come from?

creased when they were informed that no electricity was used at that end of the "line," or rather that no local source of current was employed. This was because

"A" battery furnishes this current and so enables the tube to operate. Of course, the

very constant in operation, or otherwise the action of the set will suffer. Two separate and distinct types of batteries have been adopted for general use in radio reception DRY CELLS

Dry cells are in use today, mainly because



Fig. 5. The above illustration is a r of the charger shown at the lower leaps are for the purpose of varying age, according to the battery to be Photos by courtery of Gen. Elec-

too far gone.

The principal way of testing a dry cell found to read slightly in excess of 1.5 volts. After it has been in use for some time this and when it reaches approximately

199 or C-299 tubes, as well as with WD-11



Fig. 6. Above is a view of the bulb type of charger, also illustrated in Fig. 5. Here the cover is removed to display the rectifier bulb and the incandescent light which regulates the rate of charge. With practically all chargers, full and complete directions for their operation are included by the makers.

\*\*Photos by courtesy of Gen. Electric Co.\*\*

\*\*Photos by courtesy of Gen. Electric Co.\*\*



and WD-12 tubes. In some cases, four of been dealt with before in this department.

from between the terminals occasionally: so shorten their lives.

Let us now take up the consideration of storage batteries. These batteries are un-



Fig. 2. Charging a storage battery from D.C. line is very simple, and the above circu is all that is required.

doubtedly the most commonly-used; and since they all are similar in construction, we will not bother to deal with various types here.

whatsoever. Just what does happen is that a chemical change takes place within it. This

is quite essential that a storage battery

designed for radio work, will give satisfac-However, there are some radio batthose designed for automobile starting and lighting. In the long run, there is little ent time, the writer is using a standard

later, after it is charged, be used for operatthat the type of current, introduced into a



found in the majority of house lighting sys-Although a charged battery delivers a very



Fig. 7. Above (left) a standard type of electrolytic rectifier for charging; (right) the same type of instrument with the case cut away to show construction.

Photo by courtesy of Fensieel Products Co.

therefore, is perfectly satisfactory for re-charging any type of storage battery. The found quite satisfactory for renewing your storage "A" battery for further service

CARE OF STORAGE BATTERIES

thing that it touches. In view of the fact that batteries contain acid and that breakage is liable to take place at some time or tray will keep the acid from doing any

Always keep the top of your storage batammonia again go over the entire surface and the connecting lead bars, as well as and the connecting lead bars, as well as under the bars and all around them. Do not saturate this cloth with the (Continued on page 1484)



## Round the World in a Radio Equipped Lifeboat



Four Englishmen are going on a world-girdling cruise in a 40-foot motor life-boat to test out her seaworthiness, her radio equipment and general usefulness. The article below gives a description of the radio equipment of the "Elizabeth and Blanche;



HROUGHOUT the history of the world safer for their fellow men Hitchens and his three brave companions

ment of the Marconi Company, and derives its nower from a 1/4-H. P. air-cooled gasoline

When run at reduced speed, so as to gen-

The aerial is of the four-wire flat-topped the deck of a liner, these masts are let down

by a hinge, and kept stowed along the fore-

employing six tubes, which is used in conthe boat, where it is visible in the centre of the boat, pointing athwartship.

served when tube reception is not an absolute

Where a radio compass receiver is not tion, etc., shall not cause microphonic noises in the phones. Both these types of re-ceiver, like the transmitter, are designed for operation only in the immediate vicinity of the 600-meter wave-length. It is not necessary to provide for others, beon 600 meters.

For the purpose of the voyage of the



hour storage batteries. One of these bat-teries is normally kept in the boat when The object of installing a separate power

unit for the radio equipment, instead of driving the radio generator from the main main engine breakdowns tions on the subject is 50 miles, when comdescribed gear, transmitting to ship equip-ped with a tube receiver, ranges up to 175 miles have been obtained. Communication coast station, in daylight, at a range of 300



nterior of wireless cabin, showing Radio Operator Gilbert Moss, seated before his instruments tehind him, on the deck, is the loop antenna, unshipped. In the corner of the bench is the ½ K.W. seasehed spark transmitter, and on the bulkhead in front of Mr. Moss is the 6-tube radio compassed screen and the 2-tube all-wave receiver, both fitted for alternative crystal operation. Photos £ Harcon Wireless Telegraph Co., Ltd.

## Radio Set Owner's Information

REMOVING BATTERY CORROSION

Ques.-The terminals of my storage battery get covered with a greenish paste. How get rid of this; as no matter how often I scrape them clean, in a day or so they are again covered?

Ans.—This is a form of corrosion that occurs in every storage battery, and may easily be removed with a solution of ordinary baking soda. Dissolve a tablespoonful of soda in three ounces of water, and apply it to the terminals with a rag. The cleans-ing is progressing satisfactorily, if a bub-bling and hissing takes place where the



The copper sulphate corrosion that occurs on battery terminals may be easily removed by wiping with a soda solution.

copper sulphate (the greenish substance) and smeared with a light coat of vaseline, which will in no way interfere with the proper functioning of the battery and prevent a recurrence of the accumulation.

the solution inside the battery creeping up to the terminals by capillary attraction be found to be a good remedy.

#### BUYING A LOUD SPEAKER 7. James T. McCullam of Houston,

Texas, asks:

Ques.—I wish to purchase a new loud speaker to use with my five-tube tuned radio frequency receiver. Are there any set

Ans.-The selection of a loud speaker is generally taken too lightly by the average sound without too much distortion, the purchaser is in many cases satisfied. Then, after a few months' use, a new type of

However, there are loud speakers on the will appear on the market tomorrow. many loud speakers there is a so-called "mellowness" of tone which is perhaps very pleasing to some people, but which also deceives many. It must be remembered that, distinct difference in the sound. For in-stance, play the note A above middle C on the piano, play the same note on a violin and

Just what causes these differences? It is simply a matter of overtones: there is in-

THIS page constitutes what is to be known as the SET OWN-ERS' INFORMATION department, and is to be conducted reg-ularly each month in RADIO NEWS. The purpose of the de-partment is to furnish assistance to

those readers who have not yet acquired any extensive knowledge how to handle them.

There is always new blood coming into the fraternity of radio enthusiasts; and it is obviously unreasonable to expect that they can intelligently read the articles which are written for the more experienced fans. Consequently this new department has been started one who desires to do so, to write an account of his troubles to the editor of this department. No leteditor will select from the letters which he receives those queries that seem to be of most practical interest to all, and will answer them fully and in detail each month. There will be no charge for this service. Simply write to SET OWNERS' INFORMATION DE-PARTMENT, RADIO NEWS, 53 Park Place, New York City.

sufficient space here to go into the theory. 'cello, for instance. So in the selection of a loud speaker, it

would be well to listen to a small orchestra and see if the different instruments can be distinguished. Can the high notes of the Can the notes of the 'cello be distinguished

#### INSULATING THE AERIAL LEAD-IN

8. Samuel L. Linhart of Philadelphia, Ques.-Why is it necessary to keep the lead-in of an antenna away from the roof

that are stretched between the insulators on



lead-in at least six inches from the

wires to the set itself, are at the same poan antenna in its path, it induces a charge in the wire composing the antenna, and the wire that is connected to the receiver transmits this charge to the set. This radio wave is at high frequency and from the very from one medium to another at a lower po-tential. Now if the wire from the antenna. within one or two inches of a grounded object, such as the roof or walls of the buildsignals received at the set will be weak.

the receiver should be kept at least six inches from the roof or wall. Insulators may be had, one end of which may be attached to the wall, and the other end has an eye for the wire to pass through. The place where the lead-in wire passes into the house should 1/2-inch board, about four or five inches wide, of length equal to the width of the through which the wire will pass into the room. The insulator should slant with its will not enter the tube.

This board can be placed under the lower



WHY "A" AND "B" BATTERIES? 9. Frank V. Billings of Schenectady, N.

Oues.-Why are two separate batteries necessary to operate the ordinary vacuum

by the "A" battery, which is 1½, 4½ or 6 volts, depending on the style of the tube. When an object is heated, it throws off

When the electrons are released from the

## New Developments in Radio Apparatus

A

In this interesting survey of the radio market, Mr. Griffin discusses the products of several manufacturers who have departed in some ways from the standardized ideas of the industry,



PROMINENT philosophers have been warning the public against too much standardization, because it tends to lail progress. Although, in recent installments of this department, the tendencies toward amass movements of manufactures toward a some who refuse to "follow my leader," and who achieve success by the individuality of their products. It is upon such manufactures that the industry is dependent for a

The apparatus described on the following pages is peculiarly typical of this phase of

#### A RECEIVER BALANCED BY AN

The broadcast receiver illustrated on this jage may seem unusually complex in tuning, to those who have become accustomed to expect single-control in all of the newer sets. Yet it is one of the very latest to appear on the market. It is important, therefore, that we investigate the reasons for the multiple-control.

To start with fundamentals, a gain in any particular aspect of design in radio, as in any other field, must be expected to entail will cut out very powerful locals and bring in distant stations through bad interference. The receiver is adjusted so that the dials read approximately the same at all waveAn inspection of the wiring diagram show that each of the radio frequency stages of this set forms a perfectly balanced Wheat stone's bridge, and furthermore, that the



This cabinet is distinctive in design, but the circuit and instruments within are even more unusual. Notice the separate panel light above each dial. The four controls run in absolute synchronism, and do away with the necessity of single control.

lengths. On the average receiver the settings never vary more than a division or of of the dial. As human beings are supplied with two hands, there is little excuse for not using them. The four dials may be set accurately for any desired station; and the


tuning process does not tend to unbalance the bridge at any point in the wave-length range. Just how this is done has been told in detail, in articles appearing in former issue of RADIO NEWS (page 797 of the December 1925 issue and page 1152 of the February 1926 issue).

The small balancing condensers are not controlled by knobs of the usual type, as they need be set but once, when the tubes are installed, and need be changed only when new tubes are put in. The adjustments are made by means of a screwdriver, as the shafts of the minute balancing condensers bear slots much like the head of a screw. These are covered, after the adjustments are completed, by small metal caps which serve on and pre-

show that the whole set is constructed in a food-proof manure, and intended to last for root-proof manure, and intended to last for protected by celluloid cases; and the colis are shielded in metal containers which remove the last possibility of feed-back and consecent oscillations. On page 1497 is shown cent of the colin of the colin of the colin of the relation of the coli to the shielding is such that the absorption losses are trifling. The small panel lights are an important and in tuning, opecably as this set may be

The small panel lights are an important aid in tuning, especially as this set may be logged and will bring in a station at precisely the same setting night after night.


The bridge system, of course, suppresses all tendency to oscillate, and makes it as free from extraneous noises as any set can be made, at the present time. The cabinet is




This bottom view shows the unusual method of wiring (which aids to suppress oscillations) and the small compensating condensers near the R.F. sockets. Three more are on the front panel (No. 9, below.)

some degree of lois in another aspect. Sin gle-control is a commercial impossibility; it each of the several circuits operated by one knob tunes very sharply. Always it is to be lad at some sacrifice of selectivity and sen stivity. The manufacture of the receives shown in the accompanying illustrations be lieves that selectivity and distance are characteristics of more importance than singlecontrol. In consequence untiplie-control is

(Above) One of the R.F. transformers and shielding 'can." (Right) Top view: 1, B amplifier sockets; 2, detector socket; 3, A amplifier sockets; 4, double condensers; 5, tector tuning condenser; 6, coil "cans" for R transformers; 7, A.F. transformers; 8, pa lights; 9, compensating condensers; (Recordats; 11, amerite, controlling great amplification of which this set is capable makes "hunting" for stations unnecessary. Powerful stations within two thousand miles come in readily without searching. The lack of any auxiliary balancing controls which must be used in tuning, makes the receiver simpler in the long run than many which have fewer tuning controls, but a unitional of knobs controlling rheostats, potentionacters, compensating condensers, etc.



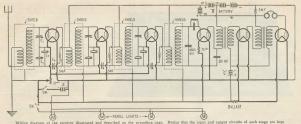

Wiring diagram of the receiver illustrated and described on the preceding page. Notice that the input and output circuits of each stage are keps at zero potential relation to each other by the Wheatstone's bridge arrangement of condensers. Or compensates for the grid-late tube capacitates. A switch is provided to cut out the panel lights except when tuning, thus conserving the "A" bettery



The receiver described below has an unusually harmonious appearance, as the front panel and knobs are made of wood to match the rest of cabinet. All metal work is lacquered brass. The dial is illuminated from the rear by a small bulk (shown as No. 7 below).


cuted. The receiver, with its panel lights in operation, has an unusually attractive appearance.

HARMONY IN CABINET CONSTRUCTION Radio buyers, who object to the "laboratory" aperance of many receivers, will find that the manufacturer of the one illustrated that the manufacturer of the one illustrated technical appearance, and in making all externals harmonic. The front penal is made of the same word used in the cubinet, and of the same word used in the cubinet, and all the contracts have also the contract appearance, and in making all external harmonic manufacturers, and the contract has been also the contract have been also that have been also the contract have been also that have been also the contract have been also that have been also the contract have been also that have been also the contract have been also that have been also the contract have been also that have been also that

The appearance of the set in operation is further enhanced by the dial light. The dial of translucent celluloid, which is read through the small window at the left of the rear by a small bulb (which may be seen in the top view of the interior.) This receiver is engineered for utmost simplicity in operation. There is but one tuning control. No verniers whatever are used. Of the two smaller knobs, the left is a filament rheostat and the right a volume control, which cuts out the last stage of audio frequency amplification when loud signals are being received. It acts also as a filament switch.

The circuit employs uned radio frequency amplification and a combination of transformers and resistance-coupled audio fresifered and resistance-coupled audio freton the state of the state of the state of the transformers and single-control cast condeners; the detection is a standard "land" take, early the state of the state of the state of the cation is transformer-coupled, and the last two resistance-coupled. The interesting method of making the three condensers und views. The large cellidod dist alex as one of the friction gears, and translates the most of the state of the

To not over often of described on the




Top and rear views of the set described on this page: 1. R. F. Amplifiers; 2. Detector; 3, page: 1. R. F. Amplifiers; 2. Detector; 3, restance of the page: 1. R. F. Transformers; 6, Tuning Concensers; 7, Dial Light; 8, Single-Control Mechanism; 9, Filament Rheostat; 10, Filament quency Transformer; 12, Resistance-Coupling Units for A. F. Amplifier; 13, Cellulod Dial. Photo by courter Pfonatich Radio Co.

posed of two fibre washers which bear on both sides of the rim of the celluloid dial and maintain a constant friction grip. This

and maintain a constant friction grip. This climinates backlash, or play, entirely. As a hard tube is used for a detector, its socket is suspended on springs to reduce vibration and consequent microphonic noises,

which are more bothersome in tubes with thin filaments.

As said before, the radio frequency transformers have a rather high ratio, about one to eight. This, and the losses intentionally





SINGLE CONTROL ON A DISTINCTIVE

An inspection of the ton and rear views


should be noticed that the edge of the upper thumb, instead of indirectly through the ver-

One of the most interesting feature of this


coupling transformer on the lower wave



changes the antenna tap on the first coil at the same time that the secondary portions

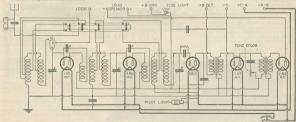

he unusual feature of this circuit is the means of changing the wave-length band. The long sliding switch, seen at the upper left, short circuits short-wave position, a portion of the secondary of each R. F. transformer, and shifts the position of the antenna tape. Note the swit and to short the antenna condenser and to change from outdoor to loop antenna. Neutralizing condensers are shown above the two R.F. tr

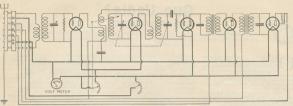

At the left of this diagram may be seen a conventionalized drawing of the round connected plug shown in the foreground of the half-time at the bottom of the page. Observe that filament voltage of the radio frequency amplifying tubes is varied simultaneously with the tickler coupling. This controls the tendency to oscillate. Two of the condensers are mounts

A T.R.F. SET OF NOVEL DESIGN
A glance at the cubinet of the tuned radio
frequency receiver illustrated in the accompanying half-thones is all that is necessary to
indicate that radio designers are alive to the
decorative possibilities of the new medium
in which they are working. It has been
committed to the committed of the c

the first stage in synchronism with the rest over the entire scale, although no difficulty is experienced in keeping the second and third in synchronism. This reduces the tuning controls to two, the proper quota for two hands. The two interior views show the sturrdiness and efficiency whilet characterizes this receiver. In the bottom view may be seen the



design. The technical appearance is not disguised, but is made instead the basis of the decoration.



Bottom view of the receiver described on this page. Note that the tubes are mounted horizontally, when the set is in its normal position within the cablest. The rheests in the center of the sub-panel! Explained in the carbin of the picture below. The numbers are explained in the carbin of the picture below.

positions of the three solenoids, each at right angles to the other two. It shows as well the double condenser at the right and the single one at the left.

Maximize Most recovery emphotos according to the writing second stage. An inspection of the writing second stage. An inspection of the writing second stage and the second stage of the se

this is the sky-scraper architecture which has grown directly out of the limitations of the coning laws. Architects have made a new type of design, within the restrictions legally imposed upon them.

Much the same thing is happening in radio. The scientific appearance is being transformed into a new type of decoration by men who understand its significance. The sloping panel and the use of metal plaques about the various controls and dials in this receiver result in an object unusually pleasing, yet representative of the function of the

The interior construction is also indicative of intelligent advancement. The manufacturer of this set believes that single control has really a set of the set of the



Top view, showing cushlosed sockets: 1, Detector Tube: 2, R.F. Amplifier; 3, A.I. Amplifier: 4, R.F. Amplifier: 5, A.F. Amplifier: 6, Stabilizing Resistance: 7, Andlo Frequency Transformers: 6, Volumetr: 9, Shothings; 1, Traing Confedence, first stage: 1, Ampling Confedence, first stage: 1, Amplifier: 1, Confedence, first stage: 1, Confedence,

## Quo Vadis?



#### BY HENRY DUROIS Being an interrogation on a few things which have come to pass in radio circles during the last two or three low-loss and straight-line epochs, and which add muchly to Ananias' repu-



H, Science! What deeds are com-mitted in thy name! To what exators of radio components be driven

has he kept it? All these are mere conjectures, but so are some of the things I have been reading during my last year's rambles through the popular radio press. I have spent many years blinding my optics over engineering text-books, and have wasted more patience than any one man ever possessed in wading through the technical journals; but never before this year, have I found that it was possible to accomplish the impossible. Let

electrostatic field where the potentials are the least, and then attaching the insulating

Well and good; the theory is correct,

a neon pencil into the electrified space would ments which must be related. We cannot snend much time on each instance, but must

be content with a mere synopsis of the won-

have encyclopedias on missing linkages: but majesty, simply because of an idea. No attention is paid to its actual greatness of smallness. However (and with a deep sigh)

it serves its purpose as "sales-talk." There are many ill-advised concerns in e radio industry. There are manufacturers of resistances other than six or thirty, or



Not so long ago there was, as you will through a condenser, and then explored the electrostatic field with a neon tube. The purpose of all this will be apparent in a

It had often been thought that much of the losses in a condenser is due to leakage through, or across, the insulating material which is used to support the movable plates; and therefore that by using this material iudiciously the losses could be reduced. The problem then resolved itself into finding the decided that they had proved all self-oscillation in radio frequency amplifiers to be due to inter-stage coupling. The electromagnetic field, in and about an innocent coil of wire and pathetically subjected to inspection, an-

No such things as neon tubes were used in looking over these fields; to tell the truth he tried; that is more than can be said of those who bungled up the coil-ic ectoplasm, not on the sensitized surfaces of photographic plates, but in the vast insensitive cranial

We have much talk about field spray; we have volumes written on leakage flux; we

or two megohms. Why, there is one "engineer" actually placed a copper can making measurements on it! The gods be spray field is nil."

All in all, there is nothing like trying

and where no credit is due we generally say of space-filler like this supplements the purpose of a cartoon, and helps make the first

# A New Loud Speaker Diaphragm



Many of the faults of radio reproduction, which have been for years blamed to the composition of the loud speaker, or its design, were really inherent in the rigidity of the little diaphraym which converts electricity into sound. A scientific whose specially has been musical instruments, has effected a considerable improvement by the use of a new type of diaphraym which is freer to what the state is use hitherto.



HERE is one problem with which designers of loud speakers have been confronted, ever since the thought of loud speakers was first conceived, and that is the correct design of the diaphragm. A great deal of the troubles of distortion and the material of which it is constructed, when in reality the diaphragm itself is to

halmer. In the early days of the ratio, early days of the ratio, early days of the ratio early days of the property of the pro

had perfected a new type of diaphragm for use with these instruments. He found that with the all-metal diaphragm, which had been in use for such a long time, there were



Fig. 1. A new compound diaphragm, which covers the whole gamut with less distortion than metallic ones. The center and rim are soft iron; the lighter parchment shows

unequal stresses and strains, which detracted from good faithful reproduction in the loud speaker. After a great deal of experiment-



Fig. 2. This illustration shows the complete loud speaker unit disassembled. The metal-and-parchment disphragen is superaded by means of servent irage of fairly process material, and allows maximum "sibration." Poles contract, of Toxer Manufacturing Cert toward resonant "cibration." Poles contract, of Toxer Manufacturing Cert.

types of this kind. Finally the cone type of load speaker was introduced to the long suffering radio public, and that was bailed as the ultimate and all the other superlatives. However, many loud speakers that because the long terms of the properties of the long that the long the long that the l

### HINT FROM STRADIVARIUS

About a year ago Dr. Herman Fisher startled the Paris Conservatory of Music and the entire musical world by producing violing, which not only rivaled the famous violing which not only rivaled the famous tion, but actually exceeded them. Dr. Fisher solved beyond any doubt the age-old secrets of the old violin craftsmen and thickness of wood in a Stradiurius is not in the geometrical center of the instrument, the directly under the foot of the sounding the directly under the foot of the sounding

On Dr. Fisher's arrival in America his a tention was directed to the many problen that had yet to be solved in connection wi the loud speaker, and a few months later ing, he found that the combination which gave consistent results was one of metal and a certain kind of parchment paper (See Fig. 1.) This composite diaphragm is therefore thicker in some portions than in others,

in somewhat the manner that the back of a violin has a center of thickness. On the proper placing of this center of metallic thickness in the diaphragm depends the tone reproduction vibrations of a load speaker; and so in this new load speaker the greatest phragm, thus allowing the center to vibrate at maximum amplitude.


A diaphragm composed solely of parchiment would, of course, combine great flexibility with a freedom from overtones much greater than that of an iron diaphragm, which is more resonant from its nature, metallic element is therefore necessary to receive the electric audio-frequency impulses and transform them into sound.

see and radistorin riters from solution.

The combination, therefore, of an interrupted metal displaying with a continuous ring in unison, brings together the distinctival or the seed of the seed of

The resultant output of the load speaker using this diaphram is said to be remark-ably free from all distortion and to reproduce the lower notes of the said faithfully, distortion to the lower of the said faithfully, called the present day have been weefully lacking in this last mentioned respect; and it is a well-known fact that it is exceedingly in a losar most. Further, the full undistorted swing from low to high notes produces the rich natural depth of tone so much desired, assuring a new conception of naturalness but must be supposed to the said of the said o

Under actual tests in Rabio News Labo-Ratories it developed that when used in a telephone receiver, this diaphragin makes for greatest sensitivity. This was to be expected because it takes very much less energy to flex this diaphragin than the ordinary one.



Dr. Herman Fisher, the eminent Russian scientist, in the laboratory where he developed the remarkable new diaphragm shown in the two illustrations above. Dr. Fisher has designed, as well, the finest of modern violins.



## Thirty Years In the Dark Room

The Experiments of D. McFarlan Moore

The fifth installment of a biography written by A. K. Laing, of RADIO NEWS, continuing Moore's experiences to the point when his ideal, artificial daylight, was achieved.



ments from one position to another, each representing some adiods of time which he spent in the succession iods of time which he spent in the succession of "dark rooms," in which most of the work-ing hours of his life have been passed. In his devotion to his great idea—providing THE FIRST SNAP-CONNECTOR

spring jaws, fastened together by a piece spring Jaws, tastened together by a piece of cord or wire. Moore removed his sleeve shortener from his arm and used it for a snap-connector in his laboratory work. He newspaper all articles and news relative to this ideal, and now has on hand a file of Although Moore's ideal of service to man-

kind is his main memory of the early dark-room days, they are also connected with reminiscences of much overwork. At one



Fig. 2. (Right) The high-frequency generator which supplanted vacuum break

Fig. 3 (Left) The arrangement of Moore Light tubes used in an interior decoration exhibit at the Mechanics' fair in Boston.



months to live. It was at this period howhis physical rejuvenation in the years that

clips and other similar connectors are the outgrowth of the sleeve fasteners in vogue At this early period in his career Moore was fired by a desire to aid in every way pos-

ner in which they came true, were set down in the last installment of this biography.

night, in rooms completely screened from the rays of the sun. This, after all, was the best condition, the best stimulus, under which to produce artificial daylight.

his first experimental lamp was too faint to be seen at all in daylight. He had to dem-onstrate it in the vault of the Edison com-

Fig. 5 (Right) Mr. Weidmann, the millionaire silk manufacturer, standing under an installa-tion of color matching tubes.

Fig. 6 (Below) The first electrical script sign.





fore the work of Marconi, deforest, or Fleming had become known, which reads, in part: "Yes, with a vacuum tube no larght han a watch, and without wire. I will yet be large to face." Although his prophecy has not one infinately connected with the radio inreached its full junification in practice, no one infinately connected with the radio intended in the property of the property of the down had it may shortly come about, just as he predicted. Already amateurs employing small five-wat transmitting tubes have comnumicated to more remote points than China; chooses to call It, is the sure development

One day when Moore entered his laboratory he notified that his him flashed on audtory he notified that his him flashed on audtory he control of the control of the conligation aboved that it was due to "body trains of volay; and showed further that his line of volay; and showed further that his time was dependent to some extent upon tuning, showed that the property of the body had changed the frequency of the under circuit, which supplied power to the lamp, and cleanted the response to the lamp, and

BEGINNINGS OF "WIRELESS"

Late in the nineties the world was suddenly aroused by the investigations of Mar-

Fig. 7. The exterior of 321 Sussex Street, Harrison, N. J., where a dark room was located in which Moore spent the years of preparation for his great success.



coni, and began to study the neglected data of the researches of Hertz. No inventor could resist the hure of this new field of the research of the research of the residual to the data of the research of the

"artificial daylight." For this reason they were never filed. Moore admits that they would have been of little financial use in any event, for there was no market for them. They included, however, specifications for tuned circuits, vacuum tubes at transmitters and receivers, perforated dises for sending intermittent impulses, selenium-cell recording devices, thermopiles, and many other features which later were incorporated into the field which later were incorporated into the field.

Due to Moore's preoccupation with the field of light he often played the part of scientific philanthropist to workers in oth fields of scientific investigation. He gas hints on high-frequency alternators, tune circuits, arcs, and other features which were

For example, when W. J. Clark attempted to demonstrate Mixeron's experiments at the wast Moore's vacamum-break, in his light example, which is a summarized to the control of the mineral management of the mineral management which proved less reliable. This was a sever withfuld both from the several public and not, however, essentially a deceit, as the demonstration was prove wifeels telepraphy; supplied the energy were located much time the mineral management of the mineral manageme

CASSOUS CONDUCTOR TYPE OF MOORE LAMPS ~

		GASEOUS CONDUCTOR TYPE	Ur	MOURE LAMPS -
	1		20	
	2		21	
	3		22	
	4		23	
	5		24	
	6		25	
	7		26	
	8	(Domm)	27	
	9		28	
	10	e Da	29	
	11	1(3)	30	PORTABLE WINDOWS WITH MAGNETIC FEED. TYPE D.
	12	JE -	31	PORTABLE TRANSFORMER AND LAMP FOR NEON.
	13	(n) (n)	32	PORTABLE ELECTRO-CHEMICAL FEED. CO2 LAMP TYPE E.
	14		33	LOW VOLTAGE CORONA LAMP. TWIN HELICES. NEGATIVE GLOW. TYPE F.
	15	<b>5</b>	34	LOW VOLTAGE NEON TUNGSTEN ARC WITH HELICAL ELECTRODES. TYPE G
	16		35	LOW VOLTAGE POSITIVE COLUMN WITH IONIZING GAPS. TYPE H.
	17		36	LOW VOLTAGE "TUNED" LAMP
	18		37	LOW VOLTAGE CORONA LAMP. STRAIGHT ELECTRODES. TYPE F2
	19		38	LOW VOLTAGE CORONA LAMP, CAVITY ELECTRODES. TYPE F3. TELORAMA.
	-			

Fig. 1 (Left) This chart shows the important stages in the development of the final commercial Moore tubes, shown at 29, and lists the further refinements of recent years as well.

Fig. 4 (Right) The magnetic mechanism of the "breathing tube." Its operation is described in detail in the accompanying article. By means of this ingenious device, minute quantities of air were admitted at intervals of one minute, to keep the pressure constant.





The author with a 6-foot exponential horn used for an experimental radio loud speaker.

URING the past year there was presented to the public with amounts to a vertiable revolution in the field of both the phonograph and the train either a radio set or a phonograph which mellowness of tone destined to render obselete the term of "cannel music"—which has been applied with a considerable amount of justice to the radio and phonograph of justice to the radio and phonograph of justice to the radio and phonograph of the properties of the properties

The change is principally due to the fact that the low, or bass, notes which have highlerto been absent from miss of this matter, are reproduced, as the produced of the matter of the produced of the matter of the produced of the produced

Who can remember having heard such a note from a radio receiver or phonograph, and who can remember having heard the deepest bass of a piano on either one of these sound reproducers? It is now possible to hear the deepest organ notes, and thowest bass of the piano perfectly repro-

lowest lass of the piano periettly repro-The difference between one of these new instruments and the old type is simply indecrablels, and must be heard to be appreference is to switch the music from one of the new instruments to an old one. The new contraction of the contraction of the read of the contraction of the contraction of the contraction of the contraction of the lower of the base as a background for the higher notes. Switch to one of the old instruments and the music changes and level higher notes. Switch to one of the old instruments and the music changes and level in the contraction of the contraction of the value of the contraction of the first time what has always been the matter with the what has always been the matter with the what has always been the matter with the part of the contraction of the contraction of the part of the contraction of the contraction of the part of the contraction of the contraction of the part of the contraction of the contraction of the part of the contraction of the contraction of the part of the contraction of the contraction of the part of the contraction of the contraction of the part of the contraction of the contraction of the part of the contraction of the contraction of the part of the contraction of the contraction of the part of the contraction of the contraction of the part of the contraction of the part of the contraction of the cont

### The Passing of "Canned Music"

By MAJOR J. S. HATCHER

Ever since the advant of radio, the reproduction of music has been the subject of a great deal of research. Major Hatcher, for many months, has been devoting his time to research work in audio frequency transformers and loud speaker horns, and tells of his findings in a most interesting manner.

DEVELOPMENT OF REPRODUCTION

Radio is somewhat similar to the phonograph in its general development. It was first amounced to the public as a scientific curiosity, epublic of senting signals witherior control of the control of the control veloped to a practical agent of communication, it was used for telegraphic code and the developments were all directed towards the vacuum tube amplifier was invented, it was found necessary to have some device to couple each stage of amplification with the next one, and transformers were used for A Transformer; is essentially an inductance

quency of the electrical limpulses for its efficiency. In addition to its inductance, every transformer has capacity between the adjacent coils of its winding. This capacity, taken in conjunction with its inductance, will form a tuned circuit which will respond more strongly to some particular frequency to which it is tuned.

It was found by experience that the great-

ext audibility of code message was obtained when the transformers were made to respond most strongly at about one thousand cycles per second, and accordingly when broadcast speech and music first made its appearance, the transformers on the market were of the type giving a strong response, or peak of audibility, at this point. (See Fig.

When radio first became a popular form



WITH POORLY DESIGNED TRANS.

The above curve shows why some transformers produce distorted music in the loud speaker.

of entertainment, reproduced speech had a high-pitched nasal sound, and the music was more metallic than ever. Some makers of loud speakers attacked this defect by making mica diaphragms, or metallic diaphragms which were corrugated in order to break up the vibrations.

Some advertised a wooden hern to introduce a mellow tone. One maker advocated a copper horn, and covered the inside with a rough finish similar to the alcohol-proof finish used on microscopes and optical instruments; the theory be ing that this roughness would prevent un'estrable reflections which would distort the tones.

However, at the beginning of the radio craze, tone quality was really a very second-ary consideration, as most of the radio experimenters of several years ago were striving for distance as the most desirable qualification of the radio receiver.

IMPROVEMENTS IN TRANSFORMERS
Lately new audio frequency transformers
have been placed on the market which have

been specially designed to reproduce the lowest audible frequencies. Several of these give very satisfactory reproductions of tones below one hundred cycles a second. (See Fig. 2.)

Some radio makers have sought to attain tone quality by using these improved transformers. Others have discarded transformers ere entirely, and are using resistance-coupled amplification, which has the advantage of giving a uniform response over almost the entire range of audible frequencies, but which has the disadvantage of giving less ampli-

fication per tube.


In spite of the fact that these improved types of amplifier were given a great deal of publicity in the radio magazines, and were tried by thousands of amattern builders, the improvement in tone quality was not as marked as had been hoped, and many people The reason for this was that these were in most instances used with loud speakers which were not capable of reproducing the

the radio set.

ELIMINATING THE HORN

made it possible to receive the lower audible frequencies, was an incentive to the development of improved types of loud speaker. Before these new amplifiers were produced, there was really no point in getting a loud speaker which would produce the deepest speaker which would produce the deepest present in the radio set, and therefore all loud speakers sounded very much alike.

One of the earliest improved load speakers is the now well known paper due type. A shich it will whenke if struck (that is, a flat a given note of its own) but a sheet of which it responds. The cone load speakers could be supported by the struck of the s



O 1000 2000 3000 FREQUENCY
RESISTANCE COUPLED AMPLIFIER
With a resistance-coupled amplifier the amplification curve is flat over a wider range of frequencies than that of a transformer-coupled amplifier.

see if it could ne made to transmit the deeper notes. Assuming that sound travels at approximately 1.15 etc per second, the deeper notes are covered to the sound travels at approximately 1.85 feet; whereas notes to excles per second, have a wave-length of approximately 38 feet; whereas notes to approximately 38 feet; whereas notes are approximately 1.5 feet ap

It was found that with our ordinary coneshaped horn, the higher the frequency of the



ence in efficiency between the two types of horns.

ted. The low notes are transmitted so weak-

ly that they are practically not heard at all; and this in itself is sufficient to account for the peculiar metallic quality of the radio and phonograph music of the past. This can be better illustrated by reference to the piano keyboard, with the statement that on the average radio or phonograph practically the whole left-hand third of the keyboard, comprising all of the deeper tones, is either conitted entirely, or very seriously slighted.

Practically no musical instrument gives pure tones in the physical sense, that is, none of the notes are composed entirely of vibrations of one frequency. Take for example, middle "C." This is supposed to represent a frequency of 250 vibrations per second. If this were strictly a pure tone, it would sound the same whether given off by a piano, violin, flute or luary; but as a matter of idea its scound wrise sensely.

depending upon what instrument produces it. The reason is that instead of being a pure tone, it is accompanied by many harmonies and over-tones, the number, pitch and intensity of which are determined by the character of the instrument producing the originater of the instrument producing the originater of the various in the character of the various in determine the character of the various in struments, and if they are slightled or left

Psychological studies have indicated the sery discovery of the lower tones are omitted. Instead being reposeful, music of this character sectually a nervous firstant; though as often the case with eye-strain and oth such sources of irritation, the victim ms.

The average radio loud speaker will not reproduce notes below about 300 cycles per second. The different investigators in this field have tried various-shaped horns, with a view to overcoming this difficulty. Among the curves tried are the parabola, hyperbola,

#### SCIENCE IN HORN DESIGN

However, the most successful horn from the theoretical standpoint, is built on what is called the exponential curve. In the cone, as we leave the small end, the horn gradually expands. If, for example, the cone has an opening at the small end 1 inch wide and expands to double its width for the first foot of length, the width at that point will then be 2 inches. At the end of the second foot the width will be 3 inches; at the third it will be 4 inches, and so on, getting an inch wider for every foot of added length.

and water for every root or associate elliging barying an original opening of 1 inch, and barying an original opening of 1 inch, and an expansion double this amount, or 2 inches at the end of the first toot, would again double, or have 4 inches at the end of the second foot, 8 inches at the end of the third foot, and so on; for each unit of length adding a given percentage, not of length adding a given percentage, or

This exponential rate is sometimes called the "law of organic growth," as it is the rate at which plants, trees and other organic materials increase in size. If, for example, a tree increases ten per cent, in size every year, the amount added each year will be

In any phonograph or radio horn the sound waves generated at high pressure in the small end, are gradually expanded as they travel along the horn until, when they reach the large end, they are released into the room at atmospheric pressure.

By extensive calculations it has been demonstrated that, in order to amplify the different tones equally, there must be the same proportion of expansion for each unit of expension of the conditions, and gives a practically uniform amplification of all frequencies with in the range for which it is designed.

#### LIMIT OF RANGE

It is found, however, that there is a certain point called the "cut-off," and the exponential horn will not reproduce frequencies beeliated to the control of the control of the ext frequency at which the horn will expeduce, is dependent on the rate of expansion. The wider the conical angle, or the greater the rate of expansion, the higher will be the "cut-off" point. The horn filhustrated will bring in notes as low as 29 cycles, and the result is that the music which it gives off



This curve shows that an Exponential born gives maximum intensity over the greatest frequency range.


been put into the sound born of the phono-

graph, and it is the most perfect loud speaker that can be obtained. A year ago an active engineer said in my presence, when contribute the properties of the concept of the properties of fact the sound box of the phonograph is so poorly designed that its defects are apparent at a casual glance. Just the shape of the tone arm makes me shutder every time I look at

In time this newly acquired knowledge reached the phonograph makers in various ways. For example, in testing the different ways. For example, in testing the different so them it was not always possible as a considerable. An easy substitute was to play a savallable. An easy substitute was to play an expense and the save that it was to play a savallable. An easy substitute was to play an expense and played on an experimental barn. It was soon found that the correct themselves were out them at all. Soon notes were not recorded out them at all. Soon notes were not recorded out them at all.

#### NEW PHONOGRAPH METHODS

New methods of making the records by an electrical process were developed, which faithfully placed on the disc every note that actually existed in the air at the time the record was being made. The noscibili-



Capt. Hiram B. Ely, head of the Government Sound Laboratory at the Frankford Arsenal, Phil delphia, with experimental 12-foot Exponential horn, designed by him for use in sound investigation


or a real singer, is present in the room. In every instance where a visitor has heard this outht, the result has been an instant desire to obtain something similar. During the early days of radio it was

During the early days of radio it wa common to hear phonograph attachment recommended instead of the conventional loss speakers; because, as was frequently re marked. "Years of scientific research have ties of the exponential horn being known, the next step was to adapt it to the phonograph by making a larger cabinet and building into it a horn which curved on itself, so as to get the greatest possible length inside the cabinet, and yet preserve the exponential expansion of area.

Two prominent phonograph companies (Continued on page 1468)

### The Experimenter's Own T.R.F. Set

By A. P. PECK, Assoc, I.R.E.



e used in constructing five-tube sets, employing two stages of tuned radio frequency tube sockets and other accessories in bread-

connected in the detector circuit in a rather peculiar manner; and, by virtue of this fact, some unusual and interesting results were

ELIMINATING INTERFERENCE

the finished receiver which is illustrated here is the fact that the unit connected in the plate circuit of the detector tube appears to act as a tuned filter circuit. With this set, the writer was able to tune out the experimental station of WJZ, ZXAR, when operating the set on an aerial 100 feet long and located at a point only approximately four miles distant from the above mentioned super-power station. Remember that this was was all that could possibly be desired.

With the connections that were employed,

it was found possible to make the set oscil-

cillation, the set was found to act well and operate quite smoothly.

As will be noted in the diagram and in the and condenser units is used in the antenna ondary tunes the grid circuit of the first R.F. tube. Another of the units couples the R.F. tube to the detector; and in the grid

IT is against the policy of RADIO NEWS to publish the names of manusconcerns with the apparatus described in these pages, but this information will be those pages, but this information will be credited in any appeals instruments described here, address a letter to the I WANT TO KNOW DEPARTMENT, enclosing KNOW DEPARTMENT, enclosing addresses of the manufacturers will be given the control of the

be found necessary to reverse the connec-tions to the primary of the third unit, or to the secondary or both. In any event, try CONTROL SHOULD BE HANDY

In order to stabilize this set so that it





Fig. 1. The scrematic circuit disposen of this novel, experimental tuned radio frequency rece is above above. Sing the screen of the screen circuit gives exceptional results when it properly believed. The same numbers assigned to the various instruments in the diag-bove are also placed on the illustrations on this and the next two pages.

making the effective tuning capacity for this so that various changes can be made


can be easily handled and so that its various effects can be studied, it becomes necessary For this work, it is absolutely necessary that a very finely-adjustable resistance be used, variable from 100 to 1,000 ohms. it may be some time after you put the set he reached and so that it is constantly at hand. Two connections were tried for this control resistance; one of them is shown in dotted lines in Fig. 1, whereas the other connection is indicated by X. The first shows the resistance connected across the in series with the primary and filament circuit. Both these positions should be tried

cut. Both these positions should be tried until the best one is ascertained. When using this set, it will be found necessary to change the tubes about until the best detector is found. Then, the plate voltage of this latter tube should be criti-cally varied. It will be found that a dif-ference of only a few volts in the potential difference in the results obtained.

The grid leak used in connection with the able throughout its range; and when the set



2. In the photograph reproduced above, 1, 5 and 18 indicate standard tuned radio frequent formers; 2, 6 and 19 are the variable condensers that tune the R. P. transformers; 3 is to amplifying unkey 4 is the amplifying tune to the 5 in the forester tune; 10 is the director tune; 10 is the dire

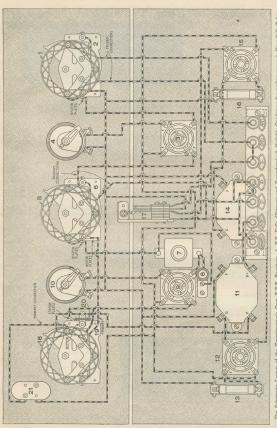

The Schematic L.

4, Rheostat for Co

9, Detector Tube;

16, Amperite: 17.

### A Loss of \$5,560.00


\$5,560,00.

is in operation, a very minute change in this much better results. This instrument is in-dicated by 8 in the circuit given and its shunt grid condenser by 7. The instru-ments employed are as follows: (See dia-

#### AN INTERESTING APPARATUS The type or receiver shown here is purely

the experimenter inasmuch as it will is possible for a radio set to operate.

writer is quite sure that the set often operated as a super-regenerator inasmuch as it



.00025-uf. capacity; 8 is a standard type of variable Miffer tube; 13 is the amperite controlling the filament may amplifying transformer; 15 is the second audio d 16 is its filament control resistance. Potota courtery Char, Freehman Co., Inc.

often be heard and was controllable. Furever developed. Hour after hour can be



5. This chart shows the tuning curve of tuned radio frequency set, indicating the dial readings for various wave-lengths.

spent observing its operation and studying evolve your own theory as to how it open and describe the results that they have ob-

tained. The set is one that seems to offer great possibilities, particularly from an experimental viewpoint, and under certain oper-ating conditions it has a kick that can be

#### OPERATING INSTRUCTIONS

The following method of putting this set into operation seems to give the most satisset that the writer built, and at any rate, it should be followed until you are familiar with the circuit. First, all the tube filaance of the grid leak, is increased until an audio frequency note is heard. Then denoise stops. This should be done with the resistance 21 at minimum setting. Then with capacity, turn the dials controlling the rheostat 4 as well as that one marked 10, providing a rheostat is used here instead of a fixed resistor. By using various combinaesting results can be obtained.

ADJUSTMENTS MUST BE WORKED OUT Do not forget that when operating this practically be learned by heart. On the

turn of the resistance control knob; and direction about the same distance to achieve maximum signal strength.




Fig. 4. 20 indicates the .00025-µf. fixed condenser, which is connected in series with the tuning condenser of one of the tuned radio frequency units, in order to reduce the effective capacity of the circuit; 21 is the 100-10 circuit of the detector tube.

### List of Broadcast Stations in the United States

MIDI OI DI OC	accor ordire	mo m mo on	nica orares
Radio Call BROADCAST STA. (\$100 to \$100 to \$10	Radie Call BROADCAST STA. Estate No. (51 to 100 to	Section	Bodie
KOKA, East Pittsburgh, Ps.         598.1 Var.           ROLR, Devils Lake, N. D.         231         5           KOPM, Cloveland, Ohio.         250         50           KOYL, Sak Lake City, Utsh         269         50           ROZE, Bakernfeld, Calif.         260         10           KFAB, Lincoth, Neb.         310         100           KFAD, Phensix, Ariz.         273         10	KFW0, Avalen, Calif	WARC, Medford Hillside, Mass., 261 166	WFBC, Knoxville, Tenn 250 50 WFBC, Philadelphia, Pa 224 5
KDPM, Cleveland, Ohio		WBAK, Harrisburg, Pa 275 540	WFBE, Seymour, Ind 296 10
KDYL, Sait Lake City, Utah 208 SP KDZB, Bakereffeld, Calif 269.7 109	SPWN Persiss   Dec.	WBAU, Haltimore, Md 216 5000 WBAO, Decator, Ill 270 100	WFBH, New York N. Y. 278 100
KFAB, Lincoln, Neb. 340.7 1009 KFAD, Phoenix, Ariz. 273 109	KFXD, Legan, Utah	WBAP, Fort Worth, Texas 675.9 1500	WFB1, Camden, N. J 236 250
KFAF, San Jose, Calif 217.3 50	KFXF, Calcrade Springs, Colo 250 500 KFXH, El Peso Trans. 212 50	WBBL, Richmond, Va	WFBL, Syracuse, N. Y 255 180
KFAB, Lincoln, Neb. 317, 1809 KFAD, Passent, Arit. 273 180 KFAD, Bestle, Arit. 273 180 KFAL, Bosiler, Colo. 201 KFAL, Bosiler, Colo. 201 KFAL, Bosiler, Colo. 201 KFAL, Bosiler, Colo. 201 KFAL, Servett, Wash. 221 KFEG, Sun Diess Colli. 22	KFXJ, Denver, Cole	WBBM, Chicago, Ill 226 1540	WFBN, Bridgewater, Mass 226 10
KFAU, Boise, Idaho	KFXM, Beaument, Texas	WBBR, Resville, N. Y 273 500	WFBZ, Galesburg, 111 254 20
KFBC, San Diego, Calif 231 10 KFBK, Sarramento, Calif 248 100	KFYF, Osmard, Calif205.4 10	WBBS, New Orleans, La 252 50	WFDF, Filint, Mich
KFBL, Everett, Wash	KFYR, Bismarck, N. Dak	WBBY, Charlesten, S. C 258 10	WFKB, Chicago, Ill
KFBU Larancie Wes 270 50	KGB, Taroma, Wash	WBBZ, Chicago, III	WFRL, Breeklyn, N. Y265.4 100
KFCB, Phoenix, Ariz 218 109 KFDD, Bellin Make 228 50	KGTT, San Francisco, Calif286.8 50	WEDC, Grand Rapids, Micit 256 50	WGBB, Freeport, N. Y 244 100
-KFOM, Beaument, Tex	KGW, Partland, Occ	WBRY, New York, N. Y 200,7 500	WGRF Evenerille Ind 278 10
KFDX, Shreseport, La 250 100	KGY, Lacey, Wash 266 50	WEOQ. Richmond Hill, N. Y 235 160	WGBI, Scramoon, Pa 240 10
KFDZ, Minneapolis, Minn 231 10	KHQ, Spekane, Wash, 273 540	WBRC, Birmingham, Abs 248 10	WGBK, Johnstown, Pa 248 5 WGBM, Providence, R. L. 524 5a
KFEC, Pertland, Ore 248 50	KIBS, San Francisce, Calif 220 5	WERE, Wilkes-Barre, Pa 231 100	WGBR, Marchifeld, Wis 229 10
KFEQ, Oak, Nebr 248 509	RLDS, Independence, Mo \$10.9 1000	WBZ, Springfield, Mass 331.1 2000	WGBS, New York, N. Y315.6 500 WGBT, Greenville, S. C 236 15
KFEY, Kellogg, Idahs 233 10	KLS, Oukland, Calif	WBZ, SyringheM Mass 331, 2840 WBZA, Blookon Mass 242 230 WGAG, Marshedd, Com 275 560 WGAG, Marshedd, Com 275 560 WGAG, Pittsburgh, Pa. 481, 3 560 WGAE, Pittsburgh, Pa. 481, 3 560 WGAE, Nerthibid, Minn 356, 5 500 WGAE, Sharberthy Place, Neb 25 560 WGAE, Washington, D. C. 488, 560 WGAE, Washington, D. C. 488, 5 60 WGAE, Washington, D. C. 488, 5 60 WGAE, San Antolio, Trans. 261 560	WGBU, Felford, Fla 278 500
KFFY, Alexandria, La 273 50	RUX, Oakland, Calif. 0682 2016 RUZ, Dusvey, Celo. 200 250 RMA, Shenaddeab, Jorea 232 250 RMA, Freno, Calif. 251 250 RMO, Taccus, Wash. 250 160 RMTR, Les Augeles, Calif. 253 500 RNRG, Los Augeles, Calif. 288, 240 RNX, Los Augeles, Calif. 336, 240 RNX, Los Augeles, Calif. 336, 240	WCAD, Canton, N. Y 263 250	WGOP, Newark, N. J 252 500
KFGC, Baton Rouge, La 268 100 KFGH, Stanford Unl., Calif 270 500	KMA, Shenindon, Iova	WGAL, Pittsburgh, Pa	WGES, Oak Park, Ill 250 500
KFGQ. Beens, Iowa 226 10	KMO, Taccess, Wash 250 100	WCAL, Nardifield, Miss	WGHP, Detroit, Mich 270 1500
KFHA, Gunnison, Colo 252 50	KNRC, Les Angeles, Calif 238 500 KNRC, Les Angeles, Calif 268.2 250	WCAP, Washington, D. C	WGNU, Richmond Hill, N. Y 234 103
KFHL, Oskalooza, Iewa. 240 10 KFI, Los Angeles, Calif. 468.5 2000	KNX, Los Angeles, Calif336.9 500	WCAR, San Antonio, Texas 263 500	WSR, Buffalo, N. Y 319 750
KF1F, Portland, Ore 248 100			West, Schuller, D. 18, 18, 18, 18, 18, 18, 18, 18, 18, 18,
KETQ, Yakina, Wash. 255 100 FFTQ, Jaman, Akash. 252 132 KFTQ, Marghalbeen, 1000 218 132 KFTQ, Asharia, Ore. 252 130 KFTQ, Asharia, Ore. 252 130 KFTQ, Codar Falls, 1000 255 250 KFTQ, Codar Falls, 1000 255 250 KFTQ, Greek, 252 250 KFTQ, 252 2			WHA, Madison, Wis,
KFIZ, Ford du Lar, Wis 273 100	The complete list of broade	ist stations, arranged for con-	WHAM, Rochester, N. Y 275 500
KFIG, Junction City, Kansas, 218.8 10	venient reference, will appear	every month in Radio News,	WHAP, New York, N. Y 240 500
KFJF, Oklahoma City, Okla 281 500	with revisions and changes u magazine. The first number	p to the closing date of the	WHAS, Leuistille, Ky
KFJM, Grand Perks, N. Duk 278 140	station is the wave-length	after the call letters of the	WHAT, Minnespolis, Minn, 253 500
KFJR, Pertland, Ore 263 50	meters; and the second number	its power, expressed in watts.	WHAZ, Troy, N. Y
KFJY, Port Dedge, Iowa 246 50	CORRECTED TO	FEBRUARY 4, 1926	WHB, Kansas City, Mo365.6 501
KFKA, Greeler, Cala 273 50			WHEC, Canton, Ohio 254 10
KFKU, Laurrence, Kans 275 500			WHBD, Bellefontaine, Ohio 222 20
KFKX, Hastings, Nebr	KOA, Denver, Colo	WCAT, Rapid City, S. D 240 50	WHEG, Harrisburg, Pa 231 29
KFLR, Albuquerque, N. Mex 254 100	KDAC, Cervallis, Orc	WCAU, Philadelphia, Pa 278 508	WHBI, Fort Warms Ind. 222 109
KFLV, Rockford, Ill 229 100	KOCH, Omnha, Neb 238 250	WCRA, Allentened Pa 234 15	WHBK, Elleworth, Mr 231 10
KFKX. Hastings, Nobr. 283,3 500e KFKZ. Kirkwille, Mo. 206 1se KFKZ. Kirkwille, Mo. 206 1se KFKZ. Kirkwille, Mo. 206 1se KFLU. San Breds, Per 216 1se KFLU. San Breds, Per 216 1se KFLU. Societed, 111. 226 1oe KFLX. Galester, Tex. 200 1se KFLX. Galester, Tex. 200 1se KFLX. Galester, Tex. 210 1se KFLX. Society, Tex. 210 1se KFLX. Soci	KOCW, Chickasha, Okla 252 200	WCBC, Ann Arbor, Mich 229 200	WHBL, Legensport, Ind215.7 50 WHBM, Chicago, III 971 92
KFMQ, Fayetteville, Ark 299.8 750	KOWW, Walls Walls, Wash 236 509	WCBE, New Orleans, La	WHBN, St. Petersburg, Fla 238 10
KFMR, Sioux City, Iona 261 100	KPO, San Francisco, Calif428.3 1000	WCBH, Oxford, Miss 242 50	WHER, Meanth's Term 258 109
KFMX, Northfield, Minn	KPRC, Houston, Texas	WCBQ, Nashville, Tenn	WHBU, Anderson, Ind
KFNF, Shenandosh, Jown 263 540	KOP, Parthard, Ore	WCBR, Providence, R. L265.4 30	WHOL Mirrespells, Minn. 278 503
KFOB, Berlingame, Calif 226 50	KQV, Pittsbergh, Pa 275 104	WGEE, Elgin, 111	WHEC, Bochester, N. Y 258 100
KFOI, Moherly, Mo. 242 10 KFON, Lone Beach, Calif. 223 540	KRE, Berkeler, Calif 256 100	WCLO, Camp Lake, Wis 231 50	WHN, New York, N. Y
KF00. Salt Lake City, Utah 238 250	KSAC, Marriettes, Kames, 3(0.7 50)	WCSH, Portland, Me 236 500	WHO, Des Meines, Ierrs 526 5009
KFOR, David City, Nebr 226 140 KFOT, Wishita Kara 231 50	KSL, Salt Lake City, Utah250.8 1600	WCSS, Springfield, Ohio 218 100	WIAD, Ocean City, N. J 250 100
KFOX, Omaha, Nebr 248 100	KSO, Chrinds, Iows 242 500	WCX, Detroit, Mich	WIRA Madison Wiles
KFPL, Dublic Terrs 258 56	KTBI, Los Angeles, Calif203.9 750	WDAD, Nashtille, Tenn 228 159	WIEC, St. Petersburg, Fla 222 100
KFPM, Greenville, Texas 242 10	KTBR, Portland, Ore 263 50	WDAF, Karoas City, Mo 365.6 500	WIBE, New Bedford Mass 222 50
KFPR, Los Angeles, Calif 231 500 KFPW, Carterville, Mo 258 26	KTH8, Hot Springs, Ark374.8 500	WDAG, Amerillo, Texas 243 108 WDAY, Paren, N. D	WIBI, Flushing, N. Y
KFPY, Spekane, Wash 266 100	KTNT, Mescatine, Iowa 256 509 KTW Smattle Work 454 3 1601	WDBC, Lancaster, Pa 258 50	WIBL, Chicago, Itl
KPMC Promettin, Mr. 2014 116 KPMC Promettin, Mr. 2014 116 KPMC Handrad Will 2017 KPMC HANDRAD WILL 2017 KPMC HANDRAD WILL 2017 KPMC HANDRAD WILL 2017 KPMC H	KUO, Sun Francisco, Calif 250 150	WDBJ, Roznoke, Va	WIBM, Chicago, III
KFQU, Alma (Holy City) Calif., 217.3 100	KUSD, Vettellion, S. D 278 100	WDBK, Cleveland, Ohlo 227 108	WIBR, Weirton, W. Va 208 50
KFQU, Alma (Holy City) Calif., 217.3 100 KFQW, North Bend, Wash 215.7 50 KFQ7 Hollamood Calif.	KUT, Austin, Texas	WDBR, Bosten, Mass 261 100	WIBS, Elizabeth, N. J
KFRB, Beeville, Tex 218 250	KWCE, Cedar Rapids, Iona 278 501	WDGH, Hanster, N. H	WIBW, Logansport, Ind 222 20
KFRU, Columbus, Mo	KWG, Stockton, Calif 248 50	WDOD, Chattanooga, Tenn 256 506	WIRV Handstreen N C
KFRW, Olympia, Wash	KWKH, Kenner/sted, La 261 500	WDWF, Cranton R. I. 450 9 745	WIBZ, Montgomery, Ala
COURT MAN BOOK WAS A 121 S 1 S 1 S 1 S 1 S 1 S 1 S 1 S 1 S 1	KWSC, Pullman, Wash348.6 509	WORT Reside City 6 D. 22 1 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	WIL, St. Leuis, Mo
KFUL, Galvesten, Tex	KYW, Chicago, Il	WEAF, New York, N. Y	WJAD, Waco, Terms
KFUM, Colorado Springs, Colo 342 108 KFUO, St. Louis, Mo545.1 509	KZM. Oakland. Calif. 216 100	WEAM, North Plainfield, N. J 261 259	WJAG, Norfolk, Nebr 270 240
KFUP, Denver, Colo	KZRQ, Menils, P. L 222 500	WEAR, Providence, R. L 278 508	WJAM, Cedar Rapids, Iona 268 100
KFUS, Oakland, Calif 256 50	WAAR New Orleans, La 268 100	WEAR, Cleveland, Ohio389.4 750	WJAR, Presidence, R. I
KFUT, Salt Lake City, Utah 251 108 KFUU, Oakland, Calif 220 50	WAAD, Chrismati, Ohlo 238 23	WEAV, Houston, Tex 275 109	WJAX, Jacksenville, Fla336.9 1000
KFUV, Springfield, Mo 252 10	WAAW, Onnin, Neb 278 500	WEBC, Superior, Wis 242 100	WIRA Indian III
KFVE, St. Louis, Mo	WABB, Harrisburg, Pa 204 10	WESS, Anderson, Ind 216 15 WESS, Cambridge, Ohio	WJBB, St. Petersburg, Fla 254 10
KFVG, Independence, Kanasa 236 10	WABI, Banper, Me 248 100	WEBH, Chicago, Ill	WIRG, Charlette N C 234 100
KFVI. Houston, Texas, 210 10	WARD, Hoterford Pa	WEBL, New York, N. Y. 273 500	WJB1, Red Bank, N. J218,8 250
KFVN, Welcome, Minn 227 50	WABR, Teledo, Ohio 263 50	WEBM, New York, N. Y 226 101	WiBK, Ypetlantl, Mich. 233 10 WiBL, Decatur, Ill. 270 500
KFVS, Cape Girardess, Mo 224 50	WARX Mount Clausers Mich and See	WEBR, Ruffele N V	WISN, Sycamore, Ill 256 10
KFYW, San Diego, Calif 216 500	WABY, Philadelphia, Pa 242 50	WEBW, Beloft, Wis 268 500	WIRD Legislator Pa
KFWA, Opien, Utah 250 10	WABZ, New Orleans, La 275 50	WEEL Besten Mass	WJJD, Mooseheart, III
KFWB, Hollywood, Calif 252 500	WAFD, Port Huron, Mich 275 500	WEBR, Buffale, N. Y. 246 5e WEBW, Beloit, Wis. 258 209 WEBZ, Bavannab, Ga. 258 5 WEET, Besten, Mass. 475,9 509 WEMS, Evanston, III. 201,9 19 WEMS, Charston H. 201,5 509 WEMS, Evanston, III. 202,5 509 WEMS, Chersten Byrings, Mich. 285,5 509 WEMS, Chersten H. 202,5 509	WJR, Pontine. Mich
KFWC, Upland, Cellf	WARM, Reyal Oak, Mich 225.4 50 WARG, Richmond Hill, N. Y 315.4 500	WENG, Berries Springs, Mich 285.5 509 WENR, Chicago, Ill.	W*Z, New York, N. Y
KFWF, St. Louis, Mo	WAIT, Tainton, Mass 229 10	WEW, St. Louis. Mo 248 100	WKAF, Milwaukee, Wis 261 500
KFWI, So. San Francisco, Calif. 224 503	WAND, Minnespells, Minn 211 500	WEMC, Breties Berings, Mich. 283.5, 509 WEMR, Christes Springs, Mich. 285.5, 509 WEMR, Chicago, III. 266 1003 WEW, St. Leuls, Me. 218, 109 WFAA, Dellis, Texas. 475.9 506 WFAM, St. Clead, Mitan. 272 14 WFAV, Linceln, Nebr. 275 506	WKAQ, Sin Joan, P. R340.7 500
KFVI, Houston, Texas. 210 keVVI, Widens, Minn. 210 keVVI, Widens, Minn. 210 keVVI, Widens, Minn. 210 keVVI, Cape Girarden, Ma. 221 for KFVR, Cape Girarden, March 201 for KFVR, Cape Girarden, Calif. 221 for Son KFVR, Cape Girarden, Cape Gi	\$2.00   100	WFAV. Lincoln, Nebr 275 590	(Continued on page 1441)

1.120

RU FOWARD SPIEGI FR

In this article Mr. Spicaler tells how to construct a six-tube radio frequency receiving set that will bring in the DX stations with good volume. The reproduction is good, because of the desian of the audio frequency amblifier

oscillation trouble encountered in tuned radio frequency receivers is caused by direct magnetic feed-back of energy, from one R.F. stage to the preceding one. The effect is most appreciable in sets employing

the troubles with which a set is already

Rearing the above facts in mind the writer recently constructed a six-tube radio freoperating with a simple two-dial control of course are the most important single intheir name from the shape of the mathe-

WINDING THE COLLS

I T is against the policy of RADIO NEWS to publish the names of assistance of the control of the

centers of exactly two inches. The wire is thin strins of adhesive plaster, and then

The turns of wire are spaced a distance wire in order to reduce the inherent canacity of the winding. The smaller this capac-

There are produced two distinct magnetic


m 3 in (7 is 4) (4) No. 1, R.F. transformers; 2, variable condensers; 3, automatic ballast resistances; 4, resistances for A.F. amplifier; 5, A.F. transformer; 6 and 7, A.F. tube sockets; 8, detector socket; 9, R.F. fabe sockets; 10, grid lesk and condenser; 11, antenna; 12, ground; 13, —"B"; 14 4 4"."

15, +135v.; 16, +90v.; 17, +22½v.; 18, -"A" and +"C"; and 19, -9v. "C"

transformer or adopted some system of inter-

glass shape to form an upright inductance, just three inches high. A simple winding form may be made by screwing two 4-inch pieces of round wood, I inch in diameter, to a plain board, with a separation between Three of these "lemnis" coils have been

One .00025-µf, grid condenser and 2-meg-Two 1/4- and one 1/4-amnere ballast re-

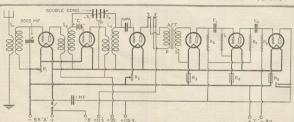

Above is shown the circuit diagram of this six-tube radio frequency receiver. The different values for the parts are given in the accompany-

# A Balanced Tuned R. F. Receiver

By JOHN M. KIRKLAND



The outstanding feature of this receiver is that oscillations are completely under control at all times. It will be found to be an excellent set for crowded districts as well as a great DX getter for the control area.





NE of the greatest drawbacks of receivers employing one or more stages of tuned radio frequency in the middle of a top-hole program they will break into violent oscillation, with or without any apparent cause. There have been cries that rang to the blue heavens for a circuit that has tuned radio frequency amplification, but will not oscillate on any occasion.

I'm is against the policy of RADIO NEWS to publish the sames of mani-connection with the apparatus described in these pages, but this information will be extend in any special instruments described here, address a letter to the I WANT TO any or the same of t

In the receiver shown in the accompanying illustrations a circuit is used that more or less fills the bill in overcoming this disadvantage of tuned radio frequency circuits in general. A multitude of systems have been created for the elimination of oscillations in this type of receiver; all the way audio amplifier. However, the detector at radio frequency tubes' filaments are controlled by the usual rheostats, while there another rheostat in series with the radio frequency tube, which serves as a control for the volume.

diagram. In the first stage of the audi diagram. In the first stage of the audi frequency amplifier there might be substituted a 6:1 ratio transformer, instead of the 2:1 as indicated. This suggestion is for experimenters, who live at a consider able distance from a broadcast extension as





Above is shown the circuit diagram of the four tube receiver. It will be noticed that the terminals marked \$\pm\$1, \$\pm\$2 and \$\pm\$3 are those for plate voltages. The last two may be connected if 90 yolts are used on both A.F. tubes.

who desire more than the usual volume from their set. If a tube of the UX-120 type is to be used in the last stage of the amplifier, this change is advisable, as this type of tube has a low amplification factor. If UV-199 tubes are to be used in both stages of the

The other change that might be made in the diagram is the introduction of a doublecircuit jack in the plate circuit of the first tube of the audio frequency amplifier. This is for fans who live in the vicinity of large cities where there are broadcast stations whose volume would be too great for the

#### CONSTRUCTIO

other illustrations a good idea can be had of the position of the various instruments. The panel, which is 7 x 18 inches, is first drilled for the condensers and the three rheo-(Continued on page 1478)

newest-fangled idea in left-handled gadgeist; but most of them are fairly difficult to adjust and the tuning is rather complicated. However, in this circuit, there is but one slight adjustment to make for the elimination of the unwelcome oscillations, and that is the variation of the small five-plate condenser (No. 8 in the views.)

The circuit for this receiver has one stage

of balanced tuned radio frequency amplification, a detector which is tuned and its sensitivity controlled by a resistance method, and two stages of transformed coupled audio frequency amplification. A feature of the minds for the last stage of the anido amplifier, so that the plate and grid bias voltages may be varied and the best resists thereby any bear of the plate and grid bias voltages between the plate and grid bias voltages between the plate and grid bias voltages between the plate and grid bias voltages leet, he has wished to try a different "B" or "C" voltage on the second stage than that used on the first; and these extra terminals are provided for this purpose. Instead of



The rear view of the receiver: 1, the variable condensers: 2, the R.F. transformer; 3, the antenna coupler; 4, A.F. amplifier tubes; 5, detector; 6, R.F. tubes; 7, A. F. transformers; 8, compensating condenser; 9, automatic filament controls; 10, high-resistance rheostat; 11, terminal board. 11, terminal board. 11, terminal board. 12, based on the property of General Radio Company

# The Ghirard 8 Super-Heterodyne



### By ALFRED A. GHIRARD, Asso. A. I.E. E.



I is against the policy of RADIO NEWS to publish the names of manucomment of the publish the names of manucommercion with the apparatus described in these pages, but this information will be glady given privately. If you are interest of the publish of the publi

THE super-heterodyne method of radio Theoretically the system is sound; but prac-

In the majority of cases when accepted faithfully in the construction, or it has not been applied correctly. In the case of the super-heterodyne, both reasons seem to apply: first, many sets offered to the public have been fostered by men who have had appointment and discouragement on the part the fan.

Lastly, most of the care and thought seems to be given to the electrical part of the set, the mechanical construction being left to take care of itself as best it can. For instance, what is the use of paying extra money for a set of efficient variable condensers, if the panels are made of a material which will warp and buckle under the strain of the weight of the instruments? Penny-wise and

The super-heterodyne should surpass all convenience, portability and selectivity.

A super-heterodyne receiver that will bring in distant stations on a 15-inch loop is a most desirable set to have, in the opinion of the majority of fans. We recommend this receiver as a good "super-het."

RESULTS WITH THE SET

The Ghirard VIII has been in the promonths. The second detector and audio frequency amplifier circuits were developed nearly six months ago in conjunction with to procure parts which are not only efficient electrically but up-to-date, small in size and able to stand up under long usage. The circuit is similar in some respects to that developed by R. W. Cotton.

At the writer's laboratory on the south shore of Staten Island (which is particu-

larly bad for loop reception on account of Philadelphia stations can be brought in on the loud speaker, consistently any night, at any time during the hours of broadcasting. The loop used is only 15 inches square, Tuning is accomplished with the two main



dials, auxiliary volume control being obtained by the use of the potentiometer—simplicity personified! The rheostats need be adjusted only occasionally to make up for changes in "A" battery voltages.

CONSTRUCTIONAL DETAILS You will notice from the circuit diagram that eight tubes of the UV201-A type are employed. The loop is tuned by a 0.0005 #f. straight-line frequency variable conden-




By using a three-tap loop, with this scheme, we obtain regeneration in the first tuning of the loop condenser and marked diquency amplification at 3,000 meters, with a In the actual operation of the set it has never

The rest of the A.F. amplifier may pering the first stage resistance-coupled and the plate circuit of the tube it works in conjunc-

The second stage of audio is transformercoupled, with a transformer which has a quality of reproduction; the amplification of the transformer is unusually high, being nearly twenty. This combination gives us an A.F. amplifier working most efficiently with the detector tube, with a saving in cost of parts and increase in volume and clarity. By-pass condensers of the values

The jack arrangement is unique. The Jack arrangement is unique. The jack permits plugging in of the phones after the first A.F. stage, and also controls the filament of the last tube. The loud speaker is permanently connected to the set at the rear by binding posts. This does away with phones are used, inserting the phone plug in the jack automatically disconnects the introduce any difficulties in the wiring I-sf, by-pass condensers are used to by-pass the R.F. currents from the I.F. (intermediobtained by running all the filament leads

CONTROLS The left hand rheostat on the set has a resistance of 6 ohms and controls the oscillator and LF, tubes. The center rheostat of 10 ohms controls the two detector tubes. The one on the right, 30 ohms, gives independent controls for the last tube. pendent control for the last tube. The first A.F. tube is controlled by a 1-A amperite. This permits of cutting the last tube in and out without affecting the brilliancy of The set is built around the helical-wound



transformers designed by Prof. Bowles. T intermediate frequency (3,000 meters) trat formers are matched to one-twelfth kilocy. They are primately of the air-core type, wi a very small quantity of iron in them. I amplification is obtained, without any cutt of the side bands to cause poor quality the reception. The filter transformer is the air-core type, tuned to a sharp peak the use of a 2,014-H, fixed condenser acre the primary winding. It is absolutely necarry to have this. 301 condenser of the prof

canacity, two 0,0005-et, straight-line ir may condenser; are slightly larger in six than the usual ,0005 condenser; but it was to sturdy mechanical construction and ele frequencies of the straight of the st

on the table, good measure,  $7 \times 21 \times 316$  is whiteindices; the tube panel  $7 \times 20 \times 316$  is the main busines post panel  $3 \times 12 \times 316$  is the main busines post panel  $3 \times 12 \times 316$  is the main busines post panel  $3 \times 12 \times 316$  is the main busines post panel  $3 \times 12 \times 316$  is the main business post panel pan

#### ARRANGEMENT OF PARTS

You will notice that the tube sockets transformers, and resisto-coupler unit are fastened to the tube panel. Practically all of the wiring is carried down under the of the wiring is carried down under the control of the control of No. 18 timed copper wire, covered where necessary with varnished tubing. The filament wiring is kept bunched, in order to take advantage of the by-passing effect, resulting in improved quality. There is less than the control of the control


A hasty glance at the hostom view of the the panel midel tead one to thick there are exceedingly long leads, but closer inspection shows that practically all of this wiring is for the flament circuits, in which moderately rather than a detriment. It is important to note that the parts have been so arranged the same than the parts have been so arranged the same than the panel, have been kept down to the unbelievable length of 'one-quarter-than the panel, have been kept down the unbelievable length of 'one-quarter-than the panel, have been kept down the unbelievable length of 'one-quarter-than the panel, have been kept down the unbelievable length of 'one-quarter-than the panel, have been kept down the unbelievable length of 'one-quarter-than the panel, have been kept down the unbelievable length of 'one-quarter-than the panel, have been kept down the panel, have been kept down to be the panel, have been kept down to be panel, have been kept down the panel, have been kept down the panel have been the panel, have been kept down the panel have been the panel, have been kept down the panel have been the panel have

Since each transformer is separated from the next by a tube socket (2/2) inches), there is no possibility of interaction also to stress the second se



ery easy to tune: the oscillator coupler adjusttient is permanent. Rheostats (left to right) -, 10-, 30-chm. Potentiometer knob in upper

man 'building his own." The filament swolfand Jack are legt under the tube panel. The and Jack are legt under the tube panel. The analysis of the panel of the state of the same panel of the




control; 15, filament control jack; and 16, filament switch.

is fastened to the panel with 6-32 R. H. machine screws, without having them show on the front.


If you can possibly manage it, have the front panel grained, or "dull finished," and engraved. This gives a professional touch to the set which is always a satisfaction to a nost directly to the end plate and rotor of the condenser.

#### WIRING

An explanation of the connections to the ve terminals of the oscillator coupler will (Continued on page 1503)

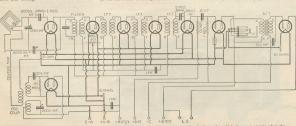

Above is shown the circuit diagram of the Ghirard VIII. The filament control jack controls also the last tube, which does not operate when the plug is in.

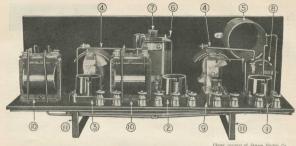

Photos country of Samon Electric Co.

No. 1 is the R.F. tube socket; 2, the detector tube socket; 3, one of the A.F. amplifier sockets; 4, variable condensers; 5, antenna inductance; 6, R.F. transformer; 7, tickler coil; 8, rhcostat; 9, neutralizing condenser; 10, A.F. transformers; 11, basebard supports.

# How To Construct the DX4

THE never circuits designed for kis manufacturers show a decided trend manufacturers show a decided trend and the stages of tuned ratio frequency and produced to the stages of tuned ratio frequency and produced to the stages of the stages o

The DX4 receiver, shown in the photographs reproduced on this page, was designed especially to bring in distant stations with good volume. For this reason low

stressed. As only one stage of tuned radii frequency is used, it is unnecessary to introduce losses and broad tuning in order to control the tendency to oscillate. This makes the overall efficiency about equal to that of the usual five-tube receiver, and simnifies the tuning operation.

I T in against the policy of RADIO NEWS to publish the names of manusconcection with the apparatus described in these pages, but this information will be globy given privately. If you are intergrated to the page of the pag

THE CIRCUIT OF THE DX4
One stage of balanced tuned radio fre-

Top view of the DX4 receiver. No. 1 is the R.F. tube; 2, detector; 3, A.F. amplifiers; 4, variable condensers; 5, antenna inductance; 6, R.F. transformer; 7, tickler coil; 9, neutralizing condenser; 10, A.F. transformers; 12, rheostata.

by a regenerative detector and two stages of low-ratio transformer-coupled and/o free stages and the stages of the

Referring to the illustrations, the cold mounted at right angles to the front pand to the form the cold of the cold pand. It is 18-turn primary and a 54-turn secondary wound at a distinct of 15 inch part on a at right angles to the sub-panel, may be set the interstage transformer and tickler is wound on a tube identical with that of the attention coupler. Within this tube recolve attention coupler. Within this tube recolve tickler winding of 16 turns of fine wire, the tool of the control of the control of the wire the tool of the control of the control of the wire the tool of the control of the control of the wire the tool of the control of the con-

component parts required

1 front panel, 7 x 18 x 3/16 inches, 1 base panel, 7 x 17 x 3/16 inches,

I filament control j I rheostat, 30-olim,

variable condensers, S.L.F. .0005-#f.

1 antenna coupler, 4 sockets for UV-201A tubes, 2 low ratio audio frequency transformers, 1 fixed condenser, .00025-μf.,

- 1 fixed condenser, .0005-µf. (with grid leak clips),
  1 fixed condenser, .001-µf.,

  Mr. Hatry's article in the February issue.
- 1 variable neutralizing condenser,
- 1 radio frequency choke coil.

The radio frequency choke coil mentioned at home. It should consist of several hundred turns of fine wire (No. 36 or smaller)

The four-tube, tuned radio frequency regenerative detector receiver called the DX4. clear idea of the arrangement of parts. It is not necessary to follow rigidly the exact spac-

ASSEMBLY

ing shown, but the general scheme of the layout shown should be adhered to. Refer-



Panel view of DX4 receiver.

at the right rear is in the first audio frequency stage, and the one near the panel

front panel view controls the detector tube only. Its resistance is thirty ohms. one at the right controls the three amplifier

take up six or more inches of lateral panel space, and as much as thirty square inches in this set take up a maximum lateral space

### Five Minutes of Radio for a Nickel By JOSEPH RILEY

NE of the favorite pastimes of the American people is dropping coins in a slot. There are the familiar station, which for the sum of one cent will

ance. If you forget to bring your pocket portable receiver with you, and there is a program on the air that you are particularly anxious to hear, just walk into a store that has one of these radio receiver slot machines, drop a nickel in the slot, set the be heard from the loud speaker in the top

This slot machine made its appearance recently in Philadelphia and consists of a five-tube radio frequency receiver, having minutes. On the side of the machine next is a table showing the times when stations are broadcasting and also the necessary dial

The small knob below the slot is turned after the nickel is deposited. This starts the dials of the receiver, and the timing mechanism is under it.

will be as common a sight as the many different types of vending machines that are familiar to everybody today and then the American boy and girl will have another



When a nickel is dropped in tion can be tuned-in by the two

### The Doughnut Five

By ASHUR UAN A. SOMMERS



The receiver described in this article takes its name from the type of exils used in the radio frequency transformers. It should prove an interesting receiver for the set builder,

radio, as in the automobile field, a stage has been reached at which no type every aspect. All sets manufactured

and sharpness there is no doubt whatever the solenoid suitable for broadcast reception



The view under the sub-panel: Nos. 6, the R. F. transformers; 7, the A. F. transformers; 8, the potentiometer, and 9, the filament switch.

\*\*Photor by courtery of the Reichman Company


as different people choose different cars besets because they appeal in some particular


The choice in the field of tuned radio

inter-stage transformers. In the January issue of Radio News (page 986), an article was published entitled "Which Type of Coil

It is gained the policy of RADIO INSWERS on publish the same of natural facturers or of makes of instruments in these pages, but this information will be these pages, but this information will be created in any special instruments described in here, address a letter to the I WANT TO address a letter to the I WANT TO any of the contract of the contr

3 Straight line frequency condensers,





No. 1 indicates the R. F. tube sockets; 2, the detector socket; 3, the A. F. amplifier sockets;
4, the variable condensers, and 5, automatic filament adjusters.

#### AMAZING STORIES

The new scientific fiction magazine, issued by the publishers of sue will contain stories by Jules Verne, H. G. Wells, George Allen England, and many others.

Brim full of scientific fiction of the type you enjoy now in this

A big magazine, with a big new idea.

Edited by Hugo Gernsback. For sale on all newsstands,

25c the copy.

### A Duplex Crystal-Detector Hook-up

Utilizing Both Halves of the Wave\*



This article will appeal to the experimenter who likes to work with crystal detectors. By using two crystal detectors it is possible to get maximum results with very little trouble in wiring

THE majority of broadcast receiving their cheapness, simple construction and easy tal with contempt, and often hook it up to various tube circuits, getting less satisfac-




It is true the crystal receiver can deliver no more energy to the phones than it receives of loss. No amplification connections, (in "cascade") are possible from the crystal. But we can find out what is needful for we study one factor, economy of signal



energy, that is to say, obtaining the greatest

The loss of energy in coils, condensers, crystal, etc., can be limited to a small amount by very careful selection of parts and highly like Fig. 1, transmits to the headset only



one-half of the oscillations which it receives,



THE CRYSTAL TRANSMITS HALF-WAVES As we all know, the action of a crystal As we all know, the action of a crystal receiver is, briefly, as follows: the waves modulated by voice or music at the broadcast station (Figs. 2 and 3), follow each other with a rapidity too great, or, as we say, with too high a frequency, to put the diaphragms of the head-phones into vibrations causing audible sound. They are therefore, and the sum of the sum to which the diaphragms respond, so that

The loudness of reception from the set FIGE

employing two crystal detectors and two i-phone sets as shown in the above diagram in halves of an incoming radio wave are rectified. now depends upon the amplitude or height of

the size of the antenna, and several other factors. The incoming oscillations in the negative direction are held back from the



Only one-half of the received modulated wave is passed to the rest of the circuit after rec-tification by the crystal detector.

ness of reception, and occasions loss which is

USING THE WASTED HALF-WAVE It is possible, by the use of two opp up which does this, by employing two separ-

First, one may connect up a double head-set, each of whose phones has 4,000 ohms resistance. Customarily the two are con-7), and then complete the circuit as shown



How a single pair of phones can be connected in the Duplex circuit to get full-wave rectifi-cation.

energy is brought to the phones, and thereby the loudest reception is obtained that is possible from an unamplified crystal set.


the amount of energy obtained from the two crystals is brought to a single head-set. For this purpose two transformers with

The loudness of signals in the phones depends upon the amplitude, A, of the rectified radio wave.

a very low step-up ratio (1:2, or, at most, kept, so that the currents in the secondary coils of the transformers shall not be work-



By using two low ratio transformers, a head set connected in the usual way (in series) may be used.

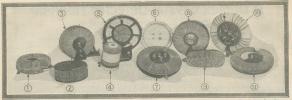

Different commercial makes of toroids: 1, Orbit: 2, Noite Circoils; 3, Bremer-Tully; 4, Radio Foundation Terocoil; 5, Thorola; 6, Summit; 7, Eria Circloids; 3, All-American; 9, Feri Coil; 10, Naxon; 11, Wybo Hexoids.

# All About Toroid Coils

There has been much ado about toroidal coils for the last several months; but strange to say, nothing of a quantitative nature was published about them until January, 1926, when RADIO NEWS took the initiative. In that issue appeared an article by Sylvan Harris on the resistance of various types of coils, which has caused considerable discussion, especially with regard to the data.




HE toroidal coil has been used for a long time in various ways in laborate case in the theoretical to the toroid is that of an anchor-ring, by which ame it was generally known until the recent enthuliasm in radio circles for fust generally known by its anathennical name, generally known by its mathennical name, in its various forms. The noun is "torus," the adjective is "rovoladi" the form "toroid "toroid the other "toroid form that the type of coil shaped like the hondy "doughnum" is generally known in

and the January issue of K. Rozo News an article was presented by the present writer, in which the high frequency resistance of tools of various types was discussed. In that could of various types was discussed. In that solid colls, and various other forms. The article awovelly educt only with the resistance of cools; nevertheless some readers took exception to the fact that I was dealing reason that, as one correspondent states. "", your article lays undue stress on a point which, although important, is not para-ratio. The primary inductance, muttal in-

bearing on the actual operation than the

This correspondent was intimately interested in the manufacture of toroidal coils, the L/R ratio of which, it was shown in my article in the Jamuary issue of Ranto Niews, is generally lower than the ratio for singlelayer cylindrical coils. He goes on to state, "... It is true that it is not possible to keep the radio frequency resistance

oratories.




At the left it is shown how the inductance varies with the number of turns (wound touching at center); above, the relation between the coil diameter and the number of turns; and on the right the effect of varying the coil diameter. Note how slowly the inductance increases compared with the number of turns, for the

to cover adequately all phases of any given subject in a single article in any magazine. Volumes may be written on the properties of coils. In the article referred to, the writer purposely omitted all considerations other than resistance, intending to leave the other phases of the subject until this present ar-

ween cylindrical and toroidal colle, see from the radio viceopinit, lies in the fast that the toroidal colls have a confined magnetic field, whereas at the ends of the cyltensity of this field may, when the length of the coll is not made greater than its diameter, he relatively great at some distance that the colls are the collection of the collection tunity then, for detertomagnetic coupling to be established between the circuit containing this coll and any other circuits which in the collection of the collection of the field. A general size of the Gertelanco of field. A general size of the Gertelanco of the magnetic fields of the two types of our

This property of the toroid has been so emphasized in the text and advertisements of radio publications that all other points seem to have been either forgotten or taken for granted. This is a peculiarity of the radio industry. No one item should ever be confindently.





This graph shows the large number of turns and length of wire required in these toroids to give an inductance of 100 microhenries.

sidered to the exclusion of all the others, in the case in point it was unnecessary to emternate the control of the control of the conarticle balanced against the hundred others. The imperance assigned to a thing is not which emphasized and repeated the others. The imperance assigned to a thing is not it depends not only on the inherent importance, but also the distance from which it is it depends not only on the inherent importance, but also the distance from which it is it depends not up, but can be studied only through a powerful telescope, merely because it is several thousand light-oyear away.

the magnetie field of the toroid it confined suggested by one numulactures' advertisement, is illustrated in Fig. 2. Imagine a meet, is illustrated in Fig. 2. Imagine a meetled in series and arranged in a circle. The windings of the coils are all the same of that the N pole of cach, oil is adjacent to the tillustrate, the separate magnetic fields poles attract, the separate magnetic fields of the different coils will be drawn in and the circle will result, and the leakage field to make the coils are added and the circle comtoniste the coils will diminish. When sufficient coils are added and the circle comlined field. There is some little leakage field from a toroid, which, however, is small comlined field. There is some little leakage field from a toroid, which, however, is small comloid. It will be noted that the toroid has no poles. This is became (referring to the circle of coils in Fig. 2) the adjacent N and

finds its most important application in radio frequency amplifiers, where it is desirable to retrogency amplifiers, where it is desirable to our stages. If coupling exists between the input and output circuits of any stage or stages self-oscillation is likely to occur, or stages self-oscillation is likely to occur, or large self-oscillation is present to the spreading field of a cylindrical coil with pieces of metal, casing of an A.F. transformer, is likely to cause perceptible losses in the system, with casing of an A.F. transformer, is likely to cause perceptible losses in the system, with these effects occur; there is considerable electric recent in the case of the constitution of these effects occur; there is considerable question, losseers, as to the magnitude of possible to keep them small no matter what kind of coil is such

The toroidal coil, on account of its co fined field, reduces considerably inter-staj coupling and losses due to absorption in a jacent metallic surfaces. There is no dou that considerable benefit arises in these directions from using toroids. The other question which must be considered, and to be fair we must consider all points, is whether these benefits are not annulled by the higher resistance of the toroid as compared with the cylindrical coil, and whether the same effects cannot be obtained by using a simple cylindrical coil of by resistance properly of frical coil of the resistance properly


It is possible to shield a cylindrical coil so that inter-stage coupling is prevented, yet without increasing the resistance inordinately. This can be done by allowing sufficient space between the shielding surfaces and the coil in question. These are some points in the argument to consider, but there are two other points which must not be forgotten. These are size and cost.

There must be considered the relative costs of shielding for cylindrical coils, and special winding methods and machinery for every fine the control of the control of the control toroid as compared with the space which toroid as compared with the space which could be the present give any answers to these questions; the thoughts are presented for what have not occurred before this to many of our readers.



The nature of the toroid can be studied as an evolution from the cylindrical coil as shown by several of the latter arranged in a circle.

We have said above that the resistance of toroids is generally higher than the resistance of cylindrical coils. The reason for this is that in order to keep the overall dimensions of the coil within reasonable limits the coil diameter must be rather small. The coil diameter is to be distinguished from



It is seen from this chart that the greatest inductance can be obtained in a toroid for a given coll diameter, when the internal diameter is small, or when the turns are bunched at the middle.

the other, which I will call the ring diameter. This corresponds to the diameter of the hole of the doublenut. The small coil diameter makes it necessary to employ many more turns of wire to obtain the required inductance.

To investigate more thoroughly the tor-

To investigate more thoroughly the toroidal coil and to understand what tendencies and paths to follow in their design, a number of calculations were made from formulas contained in Circular 74 of the Bureau of Standards. Curves obtained from these calculations are shown in the various diaerrans on these pages.

strains on these pages. First the effect of wire size was investigated. To make the calculations certain six was assumed that the cold dimenter was two inches. This is larger than is actually found cleaning the tendencies. At the center the diameter is so regulated that the turns just is nothing out of the colinary in this diagram excepting that it shows clearly that every wift is aftered as of the colinary in this diagram excepting that it shows clearly that every wift is aftered as of the colinary in this diagram excepting that it shows clearly that control of the colinary in this diagram excepting that it shows clearly that control of the colinary in this diagram excepting that it shows clearly that control of the colinary in the diagram excepting that it shows clearly that control of the colinary in the diagram excepting that it is not control of the colinary in the colinary in

(Continued on page 1472)





In this picture is shown how the magnetic field of the cylindrical coll sprays outward, while that of the toroid is confined within its windings.

# What Is "Distortion?" By DR. A. E. ANDERSON\*

In this article Dr. Anderson essays to analyze one of the most popular radio terms, "distortion" and establish the necessity of determining the type of distortion existing before the trouble can be remedied. DEPURNTION OF WAVE DEFORMITY



AST season one of the most popular

For example, it is correct to say, in com-

correcting the faults responsible for distor-tion." Rather it is the writer's purpose to emphasize that "distortion" covers a multi-tude of sins, and to point out some of the most common types of "distortion." Here is a list of some common troubles which make up "distortion":

Internal electrolytic action of "B" batteries

speakers are most serious, and are themselves due to several contributing factors.

tribute: oscillation of both radio and audio

tector, or one of incorrect value; external

"THE HEART OF THE RADIO SET"

On the other hand, the transformers have been the butt of much undeserved criticism.

favor the middle frequencies and do not ne-glect the extremes so much. The amplifica-

all audio frequencies is bound to ensue plification curve with one of high value requires a nicety of proportion and a careful ability of the core must be accurately deter-



showed the trouble to exist in some other cause, as a rule, it does its allotted work

the voltage impressed on it by the trans-

grade parts, and utilizing a good circuit,

at the present time, no known means for



counteracting static completely. It can be reduced, however, by employing a small pickup agency, such as a short, low antenna or a loop. Experiments with underground antennas indicate that static discharges are practically negligible. Unfortunately, the disadvantages of the underground antenna are such that its general adoption is impractical.

MICROPHONIC NOISES

Sustained andio oscillation, because of viterating the elements, is a particularly analysis of the property of

LOUD SPEAKERS Loud speaker distortion is a subject for

considerable comment and speculation, and as such cannot receive in this article all the attention that it deserves. However, a few of the major forms of loud speaker distortion

will be touched upon.

Horn and disphragan resonances are forms of "distortion" that after quality very much of "distortion" that after quality very much properly to the properly of the properly of

Diaphragm rattles, having a mechanical tone, are generally the outcome of a poor diaphragm adjustment. If the diaphragm is too closely adjusted to the pole pieces, vibration is restricted, and the diaphragm will strike the pole pieces if the loud speaker or



A soft, shock-absorbing cushion under the tube sockets will greatly reduce microphonic distortion. To avoid bracing the socket, small or flexible wire should be used in making socket connections.

telephones are energized to any great extent. This, of course, applies only to a reproducer constructed on the principle of the ordinary telephone headset. Those loud speakers employing a leverage mechanism to transmit the motion to the diaphragam are, as a rule, quite free from diaphragam rattles of this sort. All loud speakers having the disc type of diaphragam are subject to noises from diaphragams exacted or not rigidly clamped.

PROBLEMS OF DIAPHRAGM DESIGN Disphragm intertia is responsible for a non-uniform reproduction of all the audio free-effect of poor audio transformers. It a disphragm is wery small and light, its investigation of the control of the



Static characteristic of the UX-120 tube. Note the high negative grid bias necessary. The large working range insures sufficient capacity to handle large grid voltage fluctuations with-

is actuated, rather than its entire surface. As the frequency is reduced, the motion of the diaphragm covers a greater area; so that for the low frequencies, the whole cone is set in motion. Such an arrangement will reproduce more faithfully the great audio range of the full orchestra or an organ or piano.

### BALANCING THE OUTPUT WITH THE LOUD SPEAKER

It has been definitely proven that for beta quality and efficiency the food speaker amquity and efficiency the food speaker and put circuit. Most food speakers have an importance in the vicinity of 15000 olms at output of the 2014 tubes, or tubes of similar plate impedance. As the plate impedance plate impedance, at the plate impedance to the plate impedance on match the food in the plate impedance on match the food ing a comparatively low impedance, this ing a comparatively low impedance, this ing a comparatively low impedance of the ing a comparatively low impedance of the ing a comparatively low impedance of the lefter the plate impedance would be reduced sufficiently. Therefore, either power tubes speaker should be complete to the output cirtuity of the comparative of the plate impedance podance bound speakers, or else the load speaker should be complete to the output cirtuity of the complete the output cirtuity of the comparative of the plate impedance podance podance of the complete the output cirtuity of the complete the content circuit.



One type of adjusting transformer, designed to compensate for a known ratio of impedance between two circuits, shown in connection with a cone speaker.

voltage change in the last stage. Compensating transformers have the advantage of isolating the loud speaker from the plate current which tends to keep the disphragm in a constant state of strain. Both power tubes and coupling transformers should be used, to attain both advantages; the coupling transformer should have an impedance ratio of one to one. POOR CONTACTS AND OLD BATTERIES

Disjortion from poor contact is inexcase able, for it is one of the easiest forms to avoid, and its cure is self-evident. Sometimes the cracking and noisy quality of the tenter of the contact of the contact of the quality through the motern of the quality through the motern of the policy of the certain that the arternia; is obtained be made certain that the arternia; is obtained by the certain that the arternia; is obtained that no noises can be introduced from this source when recommercial gain, the same also applies to the commercial gain, the same also applies to the

Quite commonly, when dry cell "B" base trein become old, the quality is impared, due to a continual "Frying noise, which the continual "Frying noise, which are the continual "Frying noise, which can be continued to the continual static, This form of discortion is due to the internal chemical action of the batteries, and the only remedy is substitution of a new unpowed is a form of distortion also made possible by the old direction. The continual that the case the internal form of registers coupling is brought about examing an audio frequency feed-back. Storage: 1b batteries that they are kept in good condition.

Poor broadcasting is infrequent, but when it exists it is broad the control of the listener. To determine whether or not he tener. To determine whether or not he tener. To determine whether or not he tener to determine this question is to make a common to the control of the c

#### THE RADIO NOVEL

The radio may work all right for essays and historical treatises, but the novel—never! When hero and heroine quarrel, there simply must be a book so that one can turn to the last chapter immediately.

### What Is Regeneration? By KENNETH W. JARUIS\*



Although there has been published, of late, much in condemnation of the regenerative circuits. nevertheless regeneration remains a most efficient method of increasing detection. This article is the first of two, forming a most interesting and readily-understood explanation of the theory and



BOUT 1912 the circuits giving rise

are regenerative sets.

What does regeneration do to produce the of research in one of the largest radio research laboratories in the world. It is the pur-

inside represents the vacuum tube amplifier, and the arrow shows the direction in which

There are many types of circuits making use of this feed-back, often masquerading evident from the very nature of regenera-HOW THE "TICKLER" OPERATES

due to the inductive coupling between the or input circuit.

Fig. 4 is another variation of capacity feed-back, and is known as the "tuned plate



The above diagram shows how part of the out-put power is returned to the input, thus swell-ing the final volume of the output.

of the tube than is impressed on the grid

#### ANALYSIS OF THE TICKLER

In explaining the action of regeneration back must be chosen. This is not due to the difference in the conclusions finally Fig. 5, with one stage of neutrodyned radio

cuit from the tickler obtained? It has been so far as power input to the grid circuit is

formers, the primary and secondary are re circuit. In this circuit, the values of the ferred to the primary and the combination HOW REGENERATION VARIES

parison.) Therefore the power fed back (regenerated) into the grid circuit is di

condensers used in our radio receivers have greatest sources of loss in a radio circuit is right in the grid-filament circuit of the tube itself. The power loss in these two places varies about as the square of the voltage on the grid. This grid voltage will be designated hereafter by the term E<sub>x</sub>.





Fig. 2 is the common method, or "tickler-feed-back," of producing regeneration. Figs. 3 and 4 are two "capacity-feed-back" regenerative circuits, the latter being the "tuned-plate" system.



oscillate. Increasing the tickler coupling inloss to be supplied, and consequently gives a higher value of  $E_R$ ; and we then say the tube is oscillating harder. The important point to notice in this paragraph is that for of an electron tube, the power input exactly this oscillating point, and this condition must be more fully considered.

EFFECT OF RADIO RECEPTION The action of a radio signal on such a combination as shown in Fig. 5 must first voltage is applied to the grid of the first If the grid voltage should be applied in tude. If the grid voltage is multiplied The action is exactly the same as if we

with the same number of primary and sec-ondary turns, the circuit of Fig. 5 may be resistance of the first tube. Z represents the impedance of the tuned circuit as measured

Let a certain voltage Ep be applied as shown in Fig. 6. At this instant Ex is zero. send current to the tuned circuit, charging the condenser, and storing power in the mag-netic field of the coil. This means an inerator will decrease. This also means that the little generator supplies less and less would then flow through Ro and our little Es increases, the loss in the tuned circuit THE FUNDAMENTAL PRINCIPLE

### This-only points out again, that whether meaning of this statement is not clear, the

almost proportional to the square of the grid voltage. The variations from this simple relation are determined by the type and char-

of the most interesting phenomena of regeneration depend on these variations. In normal operation (with no signal volt-

ing is so adjusted that the power input is

#### RE-RADIATION FROM THE GRID Let a signal, Ep, now be applied. The

grid voltage Er begins to rise, due to the regenerating tube, although not a bit of But this is not the stopping point yet. Ee must build up to such a value that the loss is exactly equal to the power input. This (Continued on page 1489)

### LIST OF BROADCAST STATIONS IN THE UNITED STATES

Gall BROADCAST STA. (STA N N N N N N N N N N N N N N N N N N N	Radio Call BROADCAST STA.	Radio Call BROADCAST STA. (Catalog) Letter Location (Catalog) Letter (Catalog) Location (Catalog) Laboration (Cata	Radio Call BROADCAST STA. (\$1 to \$2.00
### Date Louise, 1886. ## 12, 1 to WALL SHOP AND A 12, 1 to WALL SHOP A	### Description of the Control of th	WAR STATE OF	### \$100 Colors III.   ### \$1

# Shielding Radio Receivers Gains Favor

BY HERNDON GREEN


HIS season has shown a tendency complete set. There are several methods

ing is necessary, or whether it is necessary? In the past we have been able to make without shielding. Why then the recent advent of shielding?

times did not prove satisfactory. At first,







of the receiver, as well as to cause it to

ly with the simple regenerative receiver, in generally uses five tubes and the latter

There is a certain optimum number of of the earliest of these attempts was made satisfactory. The main reason for this is angle at which the coils must be set to obto say their length, diameter, and the dis-

This is due to the wiring of the set, and

Here is a recent receiver in which the stages are separately shielded by metallic compart-ments, eliminating simultaneously coupling between stages, and the interference effect il-lustrated above.

### Radio Wrinkles

### MAXIMUM-MINIMUM STOPS FOR

The only way to be certain that the dial maximum and minimum stops on the plates a bit above zero, and some of the tuning range will be lost

Rigid metal stops are unsatisfactory, as an unintentional turn past the maximum or minimum position may bend the stop or,



By using a heavy rubber band as a stop for the movable condenser plates much trouble will be saved.

A method of providing stops which does in the accompanying illustration. A rubber however, upon the normal separation of the

When a straight-line frequency conden-ser is used, it is necessary to locate the band quite near the shaft, if it is to be a One of the principal advantages of this

scheme is the fact that, although the band

EASILY-MADE TUBE PROTECTOR The writer has devised a little instrument

which can be made by any fan at a very small cost. This tester shows if there is a short circuit in the receiving set.

The construction of this "tube saver" is



by using an old vacuum tube base, a miniature amp and socket an efficient tube protector can be easily made.

very simple, as reference to ing diagrams will show.

1 piece of heavy bus wire, 5 inches long, 1 old "B" battery.

1 8-volt flashlight lamp, with socket.

First of all the bus wire is bent in the shape of a "U" as shown in the drawing, The next thing is to take a burned-out vacuum tube and break the glass. very satisfactory. Solder all connections, melts, pour it into the vacuum tube socket, ing until you have the old tube socket com-

When you want to use the tester, insert the small 8-volt flashlight lamp. Suppose Before placing the vacuum tubes in their

If by any chance you have the "B" batteries connected across the filaments, the lamp burn out than the filament of a more

If you wish to use the tube saver only as a guard against connecting the "B" battery age, a lamp which is rated at 11/2 volts is correct, for a dry cell tube, such as the "WD-11." A 6-volt lamp could be used to show whether the voltage is right for the large 6-volt vacuum tubes.


Contributed by H. B. Closson, Jr.

#### VERNIER ADJUSTMENT FOR TAN-DEM CONDENSERS

Experimenters who have built receiving sets, incorporating tandem condensers have found it a very difficult task to make the ally synchronize over the whole scale. Even if the two capacitances are almost equal at all settings, it is a difficult job to construct cycles apart at certain portions of their

This is usually compensated for by using out of synchronism, is for one to tune 2 kc. high, and the other 2 kc. low for maximum response on the original setting. This means brought to 900 kc

Tuning is much simplified if a vernier is and decreases the other simultaneously, and to the same degree. Thus, in the above case, if the vernier subtracts 2 kc. from one and adds 2 kc. to the other, the complete tuning operation is done in two movements, sponse; then set the vernier for peak volume.



cellent accessory can be made, as shown for the balancing of a radio frequency ser. Three condenser plates are neces-It will be found unnecessary to touch the

main dial again, as is always necessary when the vernier controls only one of the circuits, The construction and connection of such a ches. As shown, it is mounted directly on the panel between the two condensers to which it is connected. The maximum effec-tive capacitance may be varied to suit the needs of the specific circuit by varying the height of the two mounting posts.

Contributed by Elbert Fowler,

#### A SELF-RENEWING VARIABLE GRID LEAK

A disadvantage common to almost all variable grid leaks now on the market is the fact that the "slider," or variable contact



member, of the leak gradually wears away

The accompanying illustration shows how an excellent grid leak may be made out of the graphite from an old pencil, some scraps of fibre, and a piece of spring brass. A groove is made in the base with a triangular file, and another in the upper piece of fibre. The pencil lead from a heavy pencil runs in these grosoves. At the start the upper

The easiest way to do this is to copper-plate one end of the graphite pencil lead by partially immersing it in copper sulof copper in a few minutes. other post. The handle consists of a small bit of fibre rod drilled and cemented over

When in operation the graphite on the contact rod tends to rub off little by little

### USES FOR DISCARDED FORD COIL

1. A Bushing for Vario-couplers. Bend

3. Mounts for Binding Post Strips, Two used as supports for binding post strips at the back of the set. Fig. 4 shows the exact method of bending the strips.

ings located midway, as shown in Fig.

Connectors for Dry Cells. By cutting 6, the brass vibrator pieces may be made

mounting for a grid leak cartridge, as shown

# OUICKLY-MADE PANEL LIGHTS

simple procedure of painting the top and end of each tube with black insulating var-DARK PAINT ON TOP OF TUBE



But, with the direct glow screened

away, the panel light is quite satisfactory flects the light, which would otherwise be

#### AN EASY METHOD OF "THREAD-ING" SPAGHETTI

the fact that spaghetti is apt to come just to cover a long piece of bus bar without



bending it badly out of shape, and wasting

method of getting the spaghetti over the wire. By using this method a complete

Procure a length of copper tubing, 3/16 inches inside diameter, and as long as the pieces of bus wire in use. This will probably he 24 or 30 inches. Start the spaghetti so. Then slip the bus wire into the tube and the spaghetti may be pushed on rapidly, the tube serving as a guide and preventing the development of kinks.


The real advantages of this method can hardly be realized until it has been tried. best evidence of its use is the fact that on my suggestion it has been adopted by one of

### AN INEXPENSIVE AUTOMATIC

It is a well known fact that the life of a It is a well known fact that the life of a transmitting tube is reduced considerably when the filament and plate voltages are applied simultaneously. The high plate potential should be applied a fraction of a second after the filament is lighted. This would necessitate the throwing of two

At my station I use but one D.-P. D.-T switch, one pole of which connects the antenna to the transmitter, while the other

The solenoid S of the automatic switch



The above sketches show how radio parts can be made from discarded Ford coil-vibrator holders

(Fig. 1) was made by soldering two metal washers to the ends of a brass tube and winding the tube full of wire from the secondary of an old Ford sark coil. The



solenoid is mounted in a vertical position directly above the dash-pot D. This was made by filing off the end of a test tube and ce-

rectly above the dash-pot D. This was made by filing off the end of a test tube and cementing it into the base. The plunger P is an iron spike with the disc D' soldered to its head and with its other end well insulated. In the center the silver coin C is



How the automatic switch may be connected in the power supply circuit of a vacuum tub transmitter.

soldered together with the flexible connection. When the current is turned on, the plunger rises so that the contact C meets the contact C, thus completing the plate circuit. The speed with which the switch acts depends upon the thickness of the oil used in the dash-pot, or it can be regulated by a resistance in series with the instrument. Connections for the switch are shown in Fig. 2.

### A METHOD OF CABINET CON-

As every home radio builder knows, the cabinet is the most difficult part to be constructed if a really decent-looking set is desired. A very efficient and simple method of building a cabinet is shown in the accom-

The corresponds are expressed or this experience of the section of

The back and ends of the cabinet, and the fronts of the battery compartments, may be made from thin wood veneer of any appropriate kind. This wood may be identical with that of the posts, or it may be selected to form a pleasing contrast. The front panel may be of Bakelin; Formica, Radion, Celorio, or some other special insulating material; or it may be of wood or some non-magnetic metal. This choice depends upon the desires of the individual builder, as well as upon the instruments to be incorporated into the

The top and bottom may be formed of one-inch stock, cut with square deges or rabbetted, as desired. The appropriate posts should passing up from the bottom. The panels may be slipped into the slots and Instead screen'd pilec. It is advisable in all cases to leave the front panel free, so that it may be removed when research to the corner posts rather than to the veneer.

#### A CABLE CONNECTOR FOR "A" AND "B" BATTERIES

When one desires to use two or more radio sets on one set of batteries, or when it is necessary to move one set for any reason, a detachable connector which breaks all circuits in one operation is a great saver of time and error.

Such a connector can be made at home in the following manner: Take an old tube (the peanut size is handiest) and remove all glass and cement from the base. A metal base is not suitable; use a bakelite one if possible. Solder the wire from the detector,



This illustration shows the vacuum tube base, to which is soldered the battery leads, and the tube socket on the set's rear panel.

or 22-volt contact of the "B" battery to the grid contact point of the base, passing the wire down through the base. Solder the



When the tube base is inserted in the socket the batteries are connected quickly and correctly to the receiver.

B — and A + wires to the plus filament contact of the base. The B + 90-volt wire goes to the plate prong, and the A — wire to the filament minus prong. Fasten a vacuum tube socket to the back

of each of your sets, and connect wires from the binding screens to the instruments within the set, or to the binding posts of the set if there are any. The A + and B > Heads go the set in the set of the set in the set of the the A — to the filament negative of the socket; the detector plate to the grid of the socket, and the plate leads of the amplifier times to the plate post of the socket, mosted by an ordinary electric light plug of the "straight pull" type, such as are used on

Contributed by John C. Hughes.


#### METHOD OF FIXED CONDENSER CONSTRUCTION

A bad fixed condenser is quite the easiest piece of radio apparatus that the fan can unake. A good one is very difficult to construct. A condenser that does not form a rigid unit when completed will give rise to all kinds of microphonic noises, and will prove more of a drawback than a help. Yet a rigid one usually is a complicated instrument to make at home. The illustration shows a method of con-

structing condensers which are both simple and highly efficient. It may be used for condensers of any capacitance desired, within reasonable limits, but is especially useful in making small ones for grid condensers, etc.

Procure a rod of some insulating mate-

rial, two sheets of copper foil, and a sheet of mica. The foil and mica should be one (Continued on page 1490)



The cabinet housing a set is no unimportant factor, as it is "the part that shows." The abordrawings should prove useful to the set constructor.





### Regarding Noises By JACK MILLIGRAM

fellows, and then think a minute. are not only unnecessary, but detrimental

actually filters a little. The "Six" that you

thing but noises—that, with a little work and expenditure of time, could be eliminated to the benefit of all. The two noises I am

Let us take these up in the order that little bit and decide on some remedies

Then fish around a little bit and pretty

A SURE-ENOUGH FILTER

at least 30-henry size or preferably a 40 or 8 Af. capacity will usually smooth out the

TAMING THE MOTOR GENERATOR Motor generators are supposed to be the berries for a pure D.C. note, but how often

University Radio Club, Worcester, Mass. The Gilliams Ser



### -RADIOTICS-

#### FOR THE BEAUTY PARLOR





Contributed by A. D. Scamo



Contributed by K. M. Rayner

PARENTS PLEASE NOTE

Advice for the care of in-QUIE

Contributed by W. B. Morningstern



FROM THE RUBBER TREE?

New styles in sets a vertised by the Daily beau of Dec. 20. "Set



indefinite.

On page 48 of the Radio

A Household hint from

Contributed by L. Harold Shelton ELIMINATING THE MALE INTERPERENCE

I F you happen to see any humorous mis-prints in the press we shall be glad to have you clip them out and send to us. No RADIOTIC will be accepted unless the and page on which is approximately and page on which is a self-based and printed here. A few humorous lines from each correspondent should accompany each RADIOTIC. The most humorous ones will be printed. Address all RADIOTICS to

Editor RADIOTIC DEPARTMENT. c/o Radio News. THAT FOR YOU, MR. VOLSTEAD!

WADDYA MEAN?

FOR FISHERMEN OR GIRLS?

TRY THIS ON YOUR LOUD SPEAKER

Contributed by C. M. Brow

HEY, FELLERS, SPRING HAS COME!

To increase the sale

MY, MY, MY, ALSO OH DEAR!

BIG AND STRONG AND HANDSOME

FOR THE WINTER

Contributed by W.

FOR THE DX HOUND

WE DON'T WANT IT

Contributed by D. E. Roberts

### Correspondence from Readers

In this department the readers air their views on many important questions of the day. Comregardless of the magazine's policy.



#### FRENCH RADIO STATIONS

We take the liberty of calling to your

in the December,

Wave-lengths 42 meters and 23 meters.

Radioelectrique, set up in the building of which conducts the broadcast station

#### INTERFLEX NOTES

I have found that many tubes that have

E. T. BIRDSALL, M. E. 2617 East 76th Street, Cleveland, Ohio.

late you upon the "Regenerative Interflex.

result that I am building two more sets for staff for the good things you always have in the Radio News. FRED L. KRUEGER

### DX WITHOUT CONNECTIONS

volume. I knew something was wrong some

### DX AT CHRISTMAS

ordinary home-made single-circuit "blooper, with one stage of A.F. amplification.

Perhaps you may put me down as a fol-lower of Münchhausen, but here goes. In December, 1924 (the date I failed to write great that the station seemed as though it were east of the Mississippi. But no, the

THE INTERNATIONAL TESTS

"bacon," I doubt if any will! A scattering word or two does not mean that "International Tests" are successful; but unless the

MORE INTERFLEX RECORDS!

Have been operating the Interflex-4, and considering price I don't think any set can

# RADIO SET DIRECTORY

R ADIO has now arrived at the stage where receiving sets have become stabilized to a very high degree. Inasmuch as there is continuous discussion as to various features of sets produced in the United States, Radio News has taken the initiative to present

In presenting the various sets in a directory of this kind, it is

attempted in this directory to list every set manufactured in this coun-

The Directory will be kept up to date, month by month. All manufacturers are invited to send monthly corrections as to the various

Manufacturer:
A-C ELECTRICAL
MFG, CO.,
E. Fourth St., Dayton,
Ohio
Trade Name: A-C Dayton XI.-10
Circuit: Tuned radio
frequency
Batteries: Dry cell or

Batteries: Dry Com-storage Outside Antenna: Outside Loud Speaker: Separate Controls: Three List Price: \$115

Trade Name: A-C Day-ton glass-encased Circuit: Tuned radio frequency Batteries: Dry cell or storage Antenna: Outside Loud Speaker: Separate Controls: Three

Trade Name: A-C Day-ton Phono-Set Circuit: Tuned radio frequences Batteries: Dry cell or

graph Controls: Three List Price: 395 Trade Name: A-C Day-ton XL-15 Console Model Circuit: Tuned radio

frequency Batteries: Dry cell or Storage Antenna: Outside Loud Speaker: Built-in Controls: Three List Price: \$185

Trade Name: A-C Day-ton XL-5 Knock-Antenna: Outside Loud Speaker: Separate Controls: Three List Price: \$72.50

Trade Name: A-C Day-ton Consolette Circuit: Tuned radio frequency Batteries: Dry cell or

Manufacturer: AERIAL ELEC. CO., 128 West Kinzie St., Chicago, Ill. Trade name: Crystal

King
Circuit: Crystal detector Set
Antenna: Outside
Controls: Two
List Price: \$8.00

Trade name: Combina-tion King-I Circuit: Crystal Detec-tor with A.F. amplifi-

Trade Name: Two

Trade Name: Andrews Deresnadyne DeLuxe Model Stage Amplifier Circuit: Transformer coupled A.F. Batteries: Dry cell

List Price: \$13.75 Trade Name: Combina-tion King-3 Circuit: Crystal Detec-tor and two stage A.F.

Manufacturer: AJAX ELEC. SPEC. CO., 1926 Chestnut St. St. Louis, Mo. Trade Name: Marvel-Circuit: Tuned radio frequency
Batteries: Storage recommended
Antenna: Outside rec-

Loud Speaker: None Controls: Three List Price: \$60.00

Trade Name: Ajax-V.S. & L. Crystal Set Circuit: Crystal Batteries: None Antenna: Outside or socket Loud Speaker: None

Manufacturer: ALAD-DIN MFG. CO., Muncie, Indiana Tade Name: Aladyne Plain Cabinet Circuit: Non-oscillating tuned radio frequency Batteries: Storage

Trade Name: Aladyne Semi-Console Circuit: Non-oscillating tuned radio frequency tuned radio frequency
Batteries: Storage
Antenna: Outside
Loud Speaker: Built-in
Controls: Two
List Price: \$90.00

Manufacturer:
AMERICAN BOSCH
MAGNETO CORP.
Springfield, Massa.
Trade Name: Amborola
Batteries: Storage "A"
—Dry "B" Antenna: Indoor or

Manufacturer:
ANDREWS RADIO
COMPANY,
1414 S. Wabash Ave.,
Chicago, III.
Trade Name: Andrews
Deresnadyne Model 11
Circuit: Deresnadyne
Batteries: Storage
Antenna: Outdoor or

indoor Loud Speaker: Separate Controls: Three List Price: \$125.00

Loud Speaker: Separate Controls: Three List Price: \$165.00

Trade Name: Andrews Circuit Deresnadyne Model 111 Batteries: Built-in Bal-kite B eliminator with small storage A bat-tery and built-in Bal-kite trickle charger Antennac Outdoor or indoor Loud Speaker: Built-in Controls: Three List Price: \$285.00

Manufacturer: APEX ELECTRIC MFG. CO.. 1410 W. 59th Street, Chicago, III. Trade Name: Apex Super Five Circuit: Tuned radio

frequency Batteries: Storage Antenna: Outside Loud Speaker: Separate

indoor Loud Speaker: Built-in Controls: Two List Price: \$235

Trade Name: Argus Power Electric Radio Model 300

Circuit: 1 stage untuned

indoor Loud Speaker: Built-in Controls: Two List Price: \$300

Manufacturer: AUDI-OLA RADIO CO. 430 So. Green Street Chicago, Ill. Trade Name: Audiola

### Notice to Readers

Detailed information respecting the following sets, or any other receiving sets, may be had on inquiry by addressing a letter to the Editor of the Set Directory, RADIO NEWS.

Luxe Circuit: Tuned radio Circuit: Tuned radio frequency Batteries: Storage Antenna: Outside Loud Speaker: Built-in Controls: Three List Price: \$135.00

Trade Name: Apex Baby Grand Console Circuit: Tuned radio

Circuit: Tunes
frequency
Batteries: Storage
Antenna: Outside
Loud Spraker: Built-in
Controls: Three
List Price: \$225.00

frequency
Batteries: Storage
Antenna: Outside
Loud Speaker: Built-in
Controls: Three
List Price: \$300.00

Manufacturer: ARGUS RADIO CORP., 23 West 18th St., New York New York
Trade Name: Argus
Power Electric Radio
Standard
Circuit: One stage un-

indoor. Loud Speaker: Separate Controls: Two List Price: \$160

Trade Name: Argus Power Electric Radio Model 235

Trade Name: Apex De- | Batteries: Either (storage preferred)
List Price: 890
Antenna: Outdoor
Loud Speaker: Separate
Controls: Three

Trade Name: Audiola

Trade Name: Audiola
"Sealed Five"
Circuit: Tuned Radio
Froquency
Batteries: Rither (storage preferred)
Antenna; Outdoor
Loud Speaker: Separate
Controls: Three
List Price: \$60

Trade Name: Audiola
"Console Six"
Circuit: Tuned Radio
Frequency
Batteries: Storage
Antenna: Outdoor or indoor Loud Speaker: Built-in

Trade Name: Audiola "Console Five" Circuit: Tuned Radio

Loud Speaker: Built-in

Manufacturer: BALTIMORE HUB WHEEL
& MFG. CO.
Fallsway at Gay Street
Baltimore, Md.
Trade Name: Hubco
Baby Grand Model

Circuit: Tuned radio frequency Batteries: Dry cell or storage Antenna: Outside Loud Speaker: Separate Controls: Three List Price: \$50.00

Trade Name: Hubco Baby Grand No. 101 Circuit: Tuned radio storage Antenna: Outside Loud Speaker: Separate Controls: Three List Price: \$60.00

Trade Name: Hubco Baby Grand No. 16 DeLuxe Model Circuit: Tuned radio

Trade Name: Hubco Baby Grand No. 103 Circuit: Tuned radio storage Antenna: Outside Loud Speaker: Built-in Controls: Three List Price: \$75.00

Trade Name: Hubco Baby Grand No. 104 Circuit: Tuned radio frequency Batteries: Dry cell or storage Antenna: Outside Loud Speaker: Built-in Controls: Three List Price: \$100.00

Trade Name: Hubco Baby Grand No. 105 Console Model Circuit: Tuned radio Antenna: Outside Loud Speaker: Built-in Controls: Three List Price: \$100.00

Manufacturer: BAKER-SMITH CO. New Call Building, San Francisco, Calif. Trade Name: Sylfan Circuit: Tuned radio

Batteries: Storage Antenna: Outdoor or Antenna: Outdoor or indoor Loud Speaker: Separate Controls: Three List Price: \$65.00 With built-in speak-er, \$100.00

Manufacturer: BAT-TERYLESS RADIO CORP... 116 W. 65th St., New York City

Trade Name: "No-Bat-Ry"
Gircuit: Super-tuned radio frequency
Batteries: None; Elec-tric current, D.C. or A.C.

Antenna: Outdoor or indoor Loud Speaker: Sena-Loud Speaker:
Tate
Control: 3 tuning, 2
controls
List Price: D.C. current, \$140.00; A.C.
current, \$200.00

Trade Name; "Bat-Ry-Les" Console Model Circuit: Super-tuned radio frequency Batteries: None; Elec-tric current, D.C. or A.C. A.C. Antenna: Outdoor or

Loud Speaker: Built-in Control: 3 tuning, 2

Manufacturer: G. BOIS-SONNAULT CO., Inc. 365 Canal Place, New York Trade Name: Whitestone Circuit: Tuned radio frequency
Batteries: Storage
Controls: Three
Loud Speaker: Separate
Antenna: Outdoor or

Trade Name: White-stone DeLaxe Circuit: Tuned Radio frequency Batteries: Storage Controls: Three Loud Speaker: Separate Antenna: Outdoor or List Price: \$37.50

Manufacturer: CHAS.
A. BRANSTON, Inc.,
815 Main St.,
Buffalo, N. Y.
Trade Name: Branston
Hetrola Cat. No. R45
Circuit: Tuned radio

Controls: Two
List Price: \$55.00 Trade Name: Branston Circuit: Tuned radio frequency Batteries: Storage Antenna: Outdoor Hetrola Cat. No. R46 Loud Speaker: Not in-

chuled Controls: Two List Price: \$75.00 Trade Name: Branston Hetrola Cat. No. R47 Circuter: Tured Radio frequence Batteries: Storage Antenna: Outdoor Loud Speaker: Built-in Controls: Two

# PRADIO NEWS LABORATORIES

3-1-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4-000-4

ADIO manufacturers are invited to send to RADIO NEWS LABORATORIES, samples of their products for test. It does not matter whether or not they advertise in RADIO NEWS, the RADIO NEWS LABORATORIES being an independent organization, with the improvement of radio apparatus as its aim. It, later being tested, the instruments submitted prove to be built according to modern radio engineering practication. The products of the instruments submitted prove to be built according to modern radio engineering practication. The products of the instruments submitted proves to be the product of the instruments under the products of not be accepted by the Laboratories. Apparatus ready for the market or already on the market will be tested for manufacturers, as heretelore, free of charge. Apparatus in process of development will be tested at a charge of \$2.00 per hour required to do the work. The Laboratories will be glad to furnish readers with technical information available on all material listed dree or transformers, losses in condensers, etc., and other technical informations. Address all communications and all parcels to RADIO NEWS LABORATORIES, SI Park Place, New York City.

LOUD SPEAKER



ork City. It is of unusual design nd is capable of reproducing sig-als with unusualty high quality. AWARDED THE RADIO NEWS, ABORATORIES CERTIFICATE P MERIT NO. 1213.



VOLTMETER



of tubes after it is controlled by the rheostat.
AWARDED THE RADIO NEWS
LABORATORIES CERTIFICATE
OF MERIT NO. 1219.



AWARDED THE RADIO NEWS ABORATORIES CERTIFICATE F MERIT NO. 1228. LOW-LOSS COIL



characteristics.

AWARDED THE RADIO NEWS
LABORATORIES CERTIFICATE
OF MERIT NO. 1198.

MICA CONDENSER



Radio News Laboratories, by t Magnus Electric & Radio Mi Corp., 797 East 138th Street, No.

INSULATOR



LOOP AERIAL
The unique loop aerial shown was





adapt UX-199 and -120 tubes, etc. to the standard V.T. socket. AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1206.



detector plate voltage,
WARDED THE RADIO NEWS
GORATORIES CERTIFICATE
MERIT NO, 1195,



conjunction with any coil in the



BATTERY CHARGER



found satisfactory for charging both "A" and "B" batteries. The charging rate for the storage "A" battery is approximately 5 amperes. AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1163.

FIXED CONDENSER AND MOUNTING



It is designed for use in the detec-tor circuit in any receiver. The condenser plates are entirely en-closed by some moulded material, which makes the condenser moisture AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1115.

AUDIO TRANSFORMER The audio transformer illustrate was submitted to the Radio New Laboratories for test, by Electrica Research Laboratories, Inc., 251 Cottage Grove Ave., Chicago, II t is of unusual design and capabl of amplifying current of audio free



the concentration of the control of the control of the coupled amplification.

AWARDED THE RADIO NEWS ABORATORIES CERTIFICATE OF MERIT NO. 1168.

The socket illustrated was sub-tred to the Radio News Ladora-ries for text by Alden Mfg. Co., tringfield, Mass. It is made oulded bakelite compressed to an

unusually high degree, so that the entire socket is exceptionally strong and rigid. Special prolongations of the terminal contacts are provided



AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1116.

RECEIVING SET

The receiving set shown was sub-nited to the Radio News Laboratories for test, by Magnus Electric Radio Mig. Corp., 797 E. 1384; tt., New York City, and found to ossess the qualifications requires or a receiver as regards sensitivity



AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1194. WIRELESS TRANSFORMER



ation. AWARDED THE RADIO NEWS ABORATORIES CERTIFICATE F MERIT NO. 1229.

MULTI-POINT PANEL CRYSTAL The crystal shown in the illustra-tion was submitted to the Radio News Laboratorites for test, by the



F. H. Noble Co., 29 East Madison Street, Chicago, III. This multi-point panel crystal detector was tested in conjunction with an ordi-nary crystal set and reflex receiver, and found to be satisfactory. It is the illustration shows and has a multi-point catwhisker. AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1123.

LOG CHART The radio log chart shown was submitted to the Ratio New Laron New Laron News Laron News

of this chart permits immediate loca-



AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1211. TRIGGER SWITCH

The switch shown in the illustra-tion was submitted to Radio News Laboratories for test, by Hart & Hegeman, Hartford, Com. This



trigger switch is designed for use in any receiver to turn tubes on or off, each position being indicated on the switch. It is of neat and solid construction.

AWARDED THE RADIO NEWS
LABORATORIES CERTIFICATE
OF MERIT NO. 1121.

SUB-BASE BRACKET



AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1119.

"B" ELIMINATOR



AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1166.

CONDENSER

This unique straight-line-frequency condenser was submitted to the Ranto News Laddratories for test, by the Walbert Mfg. Co., 925 Wrightwood Ave., Chicago, Ill. It is of low-

loss design and is completely covered by a transparent case which reverse



to keep out dust and makes the in-strument of consistent values. AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1217.



AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1230.

COIL The low-loss coil herewith shown was submitted to the Rabio New Largearcourse for test by the Al American Radio Corp., 4201 Belmon Ave., Chicago, Ill. It is of the toroid type, its inherent characteristic



being, as a result of the method of winding it, that of preventing mag-netic or field feed-back and thereby preventing self-oscillation. AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1167.

SPAGHETTI TUBING This spaghetti tubing was sub-mitted to the RADIO NEWS LABORA-TORIES for test, by the Crescent Braid Co., 444 Wellington Ave.



Providence, R. I. It may be used to cover the bus-wire, whenever crowded connections are made, to prevent short circuits. It is of un-usual strength and neat appearance. AWARDED THE RADIO NEWS LABORATORIES CERTIFICATE OF MERIT NO. 1214. INDUCTANCE COIL



ned radio frequency sets or wa traps, etc.
AWARDED THE RADIO NEWS
LABORATORIES CERTIFICATE
OF MERIT NO. 1209.



#### Conducted by Joseph Bernsley

HIS Department is conducted for the benefit of our Radio Experimenters. We shall be glid to answer here questions for the benefit of all, but we can appealing systems to the part of the Mr. Pernsley answers radio questions from WRNY every Thursday at 7:45 P. M.

#### OPERADIO PORTABLE RECEIVER

Q. 1. I have an Operadio portable receiver hich I carry around with me in my visits to verall of the big clifes throughout the country, y position being that of a ravelling saleman time back, however, an accident happened wonder if you could farnish me with the disarm of this receiver. The receiver is the one hich includes all batteries, and load speaker within folding case, the loop being of the folding type on, and also comprising the top overe of the

Tase. A. 1. The diagram you desire is shown in face columns (Fig. 2158-A). The model shown is the "1925 Operatio," which we believe is the nodel you describe. More complete information and data concerning this receiver may be obtained room the Operatio Corporation, 8 S. Dearborn St., Chicago, Ill.

#### 25-B AMPLIFIER UNIT

O. 2. ROCKED I AND the pleasure of literating or a Rocked I and the pleasure of literating or Exercic Co., which was attached to a ceillar of the pleasure of

The circuit of the Operadio portable receiving set, with the exact connections used in the manufactured receiver. This receiver employs three stages of radio frequency amplification, tube detector, and two stages of audio frequency amplification, using the 199 type tubes

a medium-séred incandescent balb. When used in conjunction with a radio receiv-set, this amplifier is not intended to provide the audio frequency amplification increasary for oper lond-speaking telephone operation; but only t portion of the amplification, where there is

most likely to be overloading, that is, the las stage. Thus, if satisfactory volume is obtained it a headset from the detector tube of a radio re-ceiving set, one stage of ordinary audio frequenc-amplification plus the No. 25-B amplifier will provide sufficient energy to operate a load-speaking telephone so as to be audible throughout a goo-

Operation

"The cord attached to the terminals marked

"The cord attached to the terminals marked

set. It is immaterial to which of the terminals

set. It is immaterial to which of the terminal

to conductors are connected. For the best results,

andlo frequency amplification between it and the


detector has of the rails receiving set, andle for

quency amplification, one stage should be into

quency amplification, one stage should be into

quency amplification, one stage should be into

stage of audio frequency amplification, the ampli
stage of audio frequency amplification, the ampli-



The Western Electric Type-B power amplifier unit which operates directly from an alternating current source, without any batteries required. The unit is very efficient



Design of an intermediate transformer which operates with maximum efficiency at 50 to 60 kilocycles. The correct amount of iron core must be determined experimentally.

"One Connections of the Instance and the Statement of Statement of the Sta Other Connections

nees more noticeance because of the amplification of the feffects.

"When the amplifier is not in use turn off the coord switch. This is important as it conserves the life of the vacuum tubes."

Values of the parts to be used in the construction of this unit are indicated on the diagram. [Fig. 2138-25].

#### STUDIO-TYPE SUPER-HETERODYNE (2159) Mr. J. Harrison, St. Louis, Mo., wants

(2159) Mr. J. Harrison, St. Louis, Mo., wants bower: Am anticharly interested in the West our Electric Super-Heterolyne receivers used to streamly in the Montanest attains. The particular statement of the College of

se.
Ans. J. The information you desire was obnied after a great deal of difficulty, and we are
blishing as much data as is available. However,
would like to impress you with the fact that
e Western Electric Co. does not offer this retever for sale to any person that desires one, the


tet, being only sold to brondensting stations. Nother can you obtain parts of this set from possible to admitted the set from the set of the se

should you so desire. Also, the original receiver uses only one stage of audio frequency amplification, as it is intended to be used in conjunction with a power amplifier. In our modification of the circuit, we show two stages of audio frequency amplification, so that loud speaker volume may be obtained without the addition of any other amplification of the circuit.

The parts necessary are as follows:

ane parts necessary are as follows: sociliator coil, as per specifications, 50- or 60-K.C. iron core intermediate frequency transformers, inside condensers, preferably of the straight-line-frequency type, filter transformer, madget variable condenser, range from 2 to 30 mil.

2 double-circuit jacks,
1 imple-circuit jack,
1 imple-circuit jack,
1 15-don rheostat,
1 15-don rheostat,
1 7 x 21 bakelite panel,
1 7 x 21 bakelite panel,
1 7 x 21 bakelite panel,
1 1 would be advisable to shield competely the
1 twould be advisable to shield competely the
receiver and units, especially the intermediate transformers. Shielding the receiver will be of considerable alio in diministing interference and obtain-




The original circuit used by the Western Electric Company in their type 6004-C radio re-ceiving outfit. The oscillator coil design and connections are included in the diagram; the two 48-turn windings bearing the control of the coil of the coil

Construction of the Receiver

Pease construction of the sever-companying the sewer companying the sewe

ing selectivity when local stations broadcast, also selectivity when local stations broadcast, also in conjunction with the receiver must have there in conjunction with the receiver must have there in the control of the control of

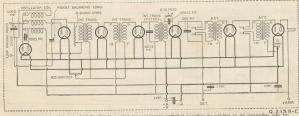

A modification of the original circuit of Fig. Q-2159, in which the potentiometer method of controlling the grid bias on the intermediate quency stages is used. Two stages of audio amplification are used instead of one, as in the original. The 0 to 50,000-0hm variable resists in the original control of the property of the control of the property of

#### Filament Control



Construction of the tuned radio frequency coil. The large coil. (left) is L2 and the smaller L1, (See diagram below.)

and to increase the current. The rhousia should be increase the current. The rhousia should be the three light to a observed red. Close the current and proceeding the current and proceeding the current and the recognition and the recognition in anticipation of the current and the recognition in anticipation of the current and the recognition is anticipated to the current and the

To tune the soll results of the property of th

#### Volume Control

"When Central Design of the Contral Co

Ministrature

A gradual decrease in the volume of reception
for the control of th

### FENWAY SUPER-HETERODYNE

medical Super-Herendezie receiver, which is beofficial Super-Herendezie receiver, which is becalled Super-Herendezie receiver, which is becalled Super-Herendezie receiver, which is becalled Super-Herendezie receiver, and in the control of the super-Herendezie receiver. In the efficiency and the super-Herendezie receiver, and the control of the super-Herendezie receiver. In the control of the super-Herendezie receiver in the super-Herendezie receiver. In the super-manda that works mentioned and the super-relation of the super-Herendezie receiver. In França and the super-Herendezie receiver in the New York San, We significant that we can be super-Herendezie receiver that we can the New York San, We significant that we can the super-Herendezie receiver that we can the super-Herendezie receiver that we can the super-Herendezie receiver that we can be super-Herendezie received the super-lezie receiver and the super-lezie receivers and the super-trum and

tube sockets, hebert, february freedom, february february




The design of the filter or in-put transformer. Although these coils may be wound similarly to ordinary transformers, ordinary honey-comb coils may be used with the same ef-ficiency.

1 by-pass condenser, .001.µf. 2 by-pass condensers, .5-µf. 1 double-reading voltmeter (large size), 1 millisameter, 0 to 50 (large size), 1 S-meg, grid leak, 8 standard vacuum tubes with poredain bases. The set will work, however, with composition based

The construction of the oscillator coils is as fol-

Two pieces of tubing are necessary, one 3 inches long and 2 inches in diameter, the other 1 inch in diameter and about 1 inch in length, and wound indiameter and about 1 inch in length, and wound inch coll may be rotated similar to a security tuner. The grid coil of the oscillator coupler should have 70 turns, the plate out 24 turns and would be should have 70 turns, the plate out 24 turns and No. 30 D.S.C. The pickeup and oscillator windings are wound on a 14-ji-the tube, the plate coil on a 3-ji-the tube which is placed within the larger tube of the plate of the plate

(Continued on page 1476)

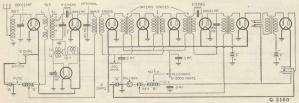

The complete schematic diagram of the Ferney Super-heterodyne. We do not advice any radical changes, although the milliammeter may be consisted, and there sugary of resistance-empled units on milliammeter may be consisted, and there sugary of resistance-empled units on milliammeter may be consisted and the major of the statement and ground, by omitting the 13d-turn cell and connecting the loop to the variable condenser. The various ground indications represent connections to the shielding, which should be grounded to prevent body-exactive.

# **ENDORSEMENT**

Two hundred and six leading broadcasting stations depend on the steady current of Willard Radio Batteries to amplify voice and music sent out on their programs.

# WILLARD Sorvice Service Service (RAD)

# BATTERIES

Our advertising tells your customers why these stations prefer Willards, and how the amplifying job of the broadcaster is identical with the amplifying job on their own radio sets.

Mentioning this point will help you to sell more Willard Radio Batteries. You know, too, that you can depend on them to give better results and to save the customer money, for Willards are built for Radio and they last for years.

WILLARD STORAGE BATTERY CO. CLEVELAND, OHIO

# The Right Selling Plan for

Radio Dealers

Your local Willard Service Station will act as your jobber on Willard Radio Batteries.

This means a quick source of supply of strictly fresh, well-charged batteries which you can turn over to your customers in the pink of condition.

No servicing problems for you. Your local Willard Service Station assumes the responsibility for service.

Months of operation have proved that this plan is effective, and profitable for all concerned.

Willard Radio Batteries are being advertised more extensively than ever.

Have your local Willard Service Station show you this advertising and explain the details of this practical plan for selling radio storage batteries. The advertisements are signed:

Sales and Service through
The Willard Battery men
and their

and their Authorized Radio Dealers

Appropriate signs and window cards will identify you as an Authorized Dealer. Booklets and other valuable selling helps are also furnished.

Your Nearest Willard Service Station is Your Nearest Willard Jobber

# and now more stations come in distinctly

# A UX Power Tube

will increase volume and clarity in YOUR set

REWIRING UNNECESSARY

tote: The UX-120 tube for dry battery sets and the UX-112 for storage battery sets reprouce more perfectly the excellant broadcasting for fedlay. These tubes handle the powerful grants of nearby and without distortion. You so tone is preserved without distortion. You without rewiring your set. A complete like yet the set of the preserved without distortion. You set one is preserved without distortion. You set one is preserved without rewiring your set. A complete like yet of the preserved without rewiring your set. A complete like yet of the preserved without rewiring your set. A complete like yet of the preserved without rewiring your set. A complete like yet of the preserved without the pres



How to improve storage battery sets Clarity and Volume can be increased in atorage battery sets by using the UX-112 tube in the last stage. Easily dirted to the UV-201A socket has stage. Easily dirted to the UV-201A socket which provides cables for attaching necessary extra B and C batteries. Price, \$12.5 Mai coupon below for complete adapter information covering use of new tubes in all sets.

How to improve sets equipped with

To increase volume and darky in sets using UV-199 tubes, me the UX-190 tube in the last state of the l

How to switch to dry batteries without sacrificing volume or quality.

mme or quadity.
The combination of a high property of the prop

ALDEN MANUFACTURING COMPANY Dept. K18 Springfield, Mass. All No-Ald Sockets, Dials and Adapters are proterted by asteute Money totalty acading.



ALDEN MFG. CO., Dept. K18, Springfield, Mass. Please send me complete information on how to increase volume and clarity in any set by the use of the new tubes.

State

Address

# "So's Your Old Ghost"

(Continued from page 1407)

get folks there and slip them messages from the dead and answer questions, all by radio.

I nodded, "Go on, it sounds good." "Whaddya mean, 'sounds good'? It was good! Well, anyhow we sits right down and dopes out the lay. Sadie was to be the

radio at the classy dump end. Mat said that he could raise enough jack to start things going and me and Solly was to work on the radio.

"We doped out the neatest little outfit that ever Old Man Radio dreamed of. on those low meters, some special radio freak tween them, some copper strips and rods for antennas and things, and we was all set Then we doped out some amplifiers to be used in the mystic chamber with the loud speakers. I was to be able to control the works by throwing a switch or two. See? "In a couple of days Mat showed up with of places that was just our meat. They was uptown and in one grand, classy neighbor-

hood. Where the medium was to pull her were two rooms, one of them a great big one that could be fixed up swell as the mystic chamber and the other was for the suckers to wait in. The other place was in a rooming house about two blocks away and outfit there.

"Well, we finally got the two places fixed up and believe me that spiritual dive was sure the goods. We had the walls of the mystic chamber hung with black velvet, with pretty tinsel stars and moons and things on them; classy lights that could be made real dim; a swell big chair for Sadie to park in when the spirits was to be brought

around for afternoon tea.

"And the radio? Now keep your shirt on.

That was the best of all. Between the hangings and the wall in three places we put these here new cone speakers and from the little closet where we put the radio works, I could throw any or all of them in the the voices were coming from. I could sit back there in my dugout and hear and see room and they never knew that I was among

"How did we work it? Well, here's the lay. We had gathered one of these new mikes that picks up a fly's footsteps, and parked it in the middle of one of those big standing lamps, that folks have alongside of pianos, You know? Well, we'd just park that thing near the person hankering after some dead soul and of course Sadie would tell them to ask their questions loud have told you was rigged for both sending and receiving. When the question was asked I'd throw the switch to the geting side and that threw in some audio amplifier tubes and guessing.

"Mat was sure the berries on raising the dead. If some poor nut came in and wanted to know what his dear departed wife thought of some trip that he was going to take, if

Build the Set That Holds 4 World's Records



The receiver that brought in stations 6,000 to 8,000 miles distant with loud speaker volume night after night. All records fully verified.

# Holds World's Records For

(1) Longest distance ever received on a loop aerial—8,375 miles.
(2) Most consistent reception of stations 6,000 to 8,000 miles distant—117 programs in three months.
(3) Brought in 6 different stations in 2½ hours—all over 6,000 miles.

Complete Set of Parts......\$89.00 (Includes all parts necessary to make an exact duplicate of this woomlerful receiver, together with blue prints and complete building instructions.)

Story of development and proofs of records sent on receipt of stamped and addressed envelope.

Scott Radio Laboratories 39 S. Dearborn St. Chicago Dealers and set builders write for discounts



Better Results Here's a tube that gives bette sults and at a new low price. it in your set as a detector or lifier. The quality materials



Euarast ing mail money-order We pay posts

K. & H. ELECTRIC CO. 43 Commercial Street Newark, New Jersey LATEST "COAST TO COAST" FULLY GUARANTEED





d myself after staumering 20 yrs. B. N 6954 Begue Bidg., 1147 N. III. St.



# "Your radio is always top notch. What do you do to keep it so full of pep?" KEEPING your "B" batteries full of pep, without instead of 2 Eveready No. 770's or 2

requent renewals, is simply a matter of using the right size Evereadys for your particular set with a "C" battery\*.

The rule which determines the right size "B" batteries to use is so simple no one can make a mistake, and once learned it definitely settles the question of "B" battery service and economy.

On 1 to 3 tubes — Use Eveready No. 772.

On 4 or more tubes — Use the Heavy Duty "B" Batteries, either No. 770, or the even longer-lived Eveready

Layerbilt No. 486.
On all but sinale tube sets

-Use a "C" battery.

When following these rules, No. 772, on 1 to 3 tube sets, will last for a year or more, and Heavy Duties on sets of 4 or more tubes, for 8 months or longer.

These life figures are based on the established fact that the average year-round use of a set is 2 hours a day.

A pair of Eveready No. 772's for a 5-tube set

instead of 2 Eveready No. 770's or 2 Eveready Layerbilts No. 486—looks at first glance like an economy because of lower first cost. But in a few months the 772's will be exhausted and have to be replaced. After the same length of time the Eveready No. 770's or the Eveready Layerbilts No. 486 will still be good for many more months of service.

We have prepared for your individual use a new booklet, "Choosing and Using the Right Radio Batteries," which we will be glad to send you upon request. This booklet also tells about the proper

battery equipment for use with the new power tubes. \*Note: In addition to the increased

life which an Eveready "C" Battery gives to your "B" batteries, it will add a quality of reception unobtainable without it.

unobtainable without it.

Manufactured and guaranteed by
NATIONAL CARBON Co., Inc.
New York San Francisco

Canadian National Carbon Co., Limited Toronto, Ontario

P. M., Eastern Standard following state wear-New York W wayan-Providence waran-Boston waran-Worcester waran-Worcester

tations: wast-Circlinati west-Cleveland wwy-Detroit wos-Chicago woc-Davenport

Pacific Coast, Eveready Progra





Can be quickly and easily connected and disconnected. They give perfect temporary or permanent connections.

A PAIR

YOU'LL find them quicker and easier to connect, more convenient, surer and better than binding posts. They contain the property of the panel and provided the battery lead wires or phone tips securely, elease easily, save time and trouble. Set utilders and owners realize their advantage of the provided provided the panel of the provided provide

irmly grip all wires from No. 11 to o. 24 B & S gauge. Three sizes for 1 panels. TYPE A (Standard) for '16" to '4" panels. TYPE B all panels. TYPE A (Standard) for 3/16° to ½" panels. TYPE B (Special) for panels, cabinet walls and partitions from 5/16" to ½" thick. TYPE C (Special) for panels up to ½" thick. HEAVILY NICKEL PLATED.

The Engineers and Designers of the

### HAMMARLUND-ROBERTS RECEIVER

Specify the Use of Union Radio Tip Jacks

for their convenience, and ease of con-necting and disconnecting all the input lead wires. This compact, efficient and highly recognized receiver employs only the lead of the convenience of the con-traction of the contract of the con-traction of the contract of the con-traction of the contract of the con-traction of t

Other Guaranteed Radio Products VERNIER DIAL ADJUSTERS -Price 60c.



IDENTIFICATION TAGS - Hard, red ibentification 1 aug — Hard, rea fibre ovals with stamped designations. Thread them on your wires—they save time in tracing leads. COMPLETE SET OF 9 TAGS ONLY 10e.

Ask your dealer for Union Radio Tip Jacks and other guaranteed products or write to us for illustrated and descriptive circular "C."

TO ALL BRANCHES OF THE TRADE

UNION=RADIO-CORPORATION 60000

he was an old guy, a nice sweet old lady's

'The seekers after the dead one would show up on the minute and Solly, all dolled ban and brown stuff smeared on his face, would open the door and shut 'em in the they got into Sadie. Then after we had for a while, Solly would show 'em in to Then Sadie would do her stuff and she could, too, what I mean. Mat had given her the low-down on the line she was to sling and after a week or so of practising you would never think that she had talked any other way. Oh, boy, it was sure a treat to hear her moan out, 'Who that is

"Sadie was all dolled up like the Queen As I was saying, Sadie looked great in her scenery and we always had a baby-spot on of the picture.
"Well, we were doing a nice little business

ing in faster, so they dopes out a lay to give some phony tips on the stock market and things like that, Mat knowing some bird

"Gosh, the way we worked that was the old-time pipe. Some of these poor bozos used to ask their dead folks if they should buy different stocks at certain times and test profit. Mat got all the dope from his friend and then for a while they would give stuff and Brother Sucker would be out

some jack and we would be in."
"But I don't see . . ." I interrupted. "What don't you see?" Pat asked with a

"How did you and the rest of the gang The pained expression became more so.

buy something that his friend had told him would be pretty sure to do the balloon Well, they would be tickled pink if they made some coin and back they'd come for more. Then when they was ripe for a killin' Mat would slip 'em the word to buy on the toboggan. Well, instead of ever shares and then when the stock would fall we would split the margin. Oh, that was "Of course, it was risky, but most of the

suckers had to have several doses of it be-fore they found that Grandma or Cousin See now

"Well everything was going along all jake for a long time. One day the door slams open and Mat bounces in, all happy as a hop-head loaded up with snow. He





The Famous Truly Portable TELMACO P-1 Receiver Four Tubes Do the Work of Seven see of poetables in size, weight, case of tuning, with, distance, volume, workmanship and price, lead speaker and batteries self contained, sto with tubes and batteries. \$125.00 Receiver only

P-1 Kit Saves You Money! offer of the Telmaco P-1 Receiver in kit form has with cuthestantic reception. This consists all s, as built by us, including case, drilled and en-red panel, and illustrated instructions. \$80.00 piete kit your dasher or write us. Descriptive folder free.

Radio Divisions Telephone Maintenance Co. 20 So. Wells St. Dept. B Chicago, Ill.


> CELMARIS ality Radio Exclusively S Established 1918



### AGENTS WANTED 5 Tube Demonstrator FREE

Earn \$25 to \$100 a week, past or full time. Everyone a prespect. Complete likes standard seek and accessaries, \$2,00 to \$500 a. Wytte seeky for Hilburtsel centaion and exclusive selling plan for live dealers and community agents. 20TH CENTURY RADIO CO., 1001 Coca Cola Bildy. Kannas City, Mo.







# **Balkite Radio Power Units**

Balkite Radio Power Units give unfailing, uniform current for both circuits from the light socket. One very popular Balkite installation, especially for heavy duty sets where reserve "A" power is required is with the Balkite Battery Charger and Balkite "B." Here the noiseless, high-rate Balkite Battery Charger is ideal. If your battery should be low, you merely turn on the charger and operate the set. Balkite "B" eliminates "B" batteries entirely and supplies plate current from the light socket.

# Balkite light socket equipment

Another very popular Balkite installation is with the Balkite Trickle Charger and Balkite "B." The Balkite Trickle Charger converts your "A" battery into an automatic "A" power unit that provides "A" current from the light socket, so that both circuits operate from the lighting circuit. This installation enables you to convert your present receiver into a light socket set.

# Noiseless - No hulbs - Permanent

All Balkite Radio Power Units are permanent pieces of equipment, entirely noiseless, have no bulbs, nothing to break, replace or get out of order. Their current consumption is very low. All operate from 110-120 volt AC current, with models for 50, 60 and other cycles. All are tested and listed as standard by the Underwriters' Laboratories.

The Balkite Railway Signal Rectifier is now standard equipment on over 50 leading American and Canadian Railroads





Balkite Trickle Charger



Balkite Battery Charger



Balkite "B" II



The outstanding receiver development of the season, genius of two of the most distinguished radio engi-

neers. A receiver for the home builder that will represent for several seasons to come a far greater value than any other design available.

Several outstanding features place the design in a position far in advance of anything available or contemplated. Unlimited wavelength range, with interchangeable antenna and detector coils; marvelously improved audio transformers; a special self-contained wiring harness: but one tuning or station selector

Over-all design is rugged and solid. Adapted to practically any standard cabinet, any standard tube, any battery or eliminator source of supply, outdoor antenna or loop.

Only a screw driver and pair of pliers necessary. The set can be built at an extremely low cost and parts are readily available at all radio dealers.

Represented Manufacturers: Belden Mfg. Co .- S-C Wiring Harness Central Radio Laboratories-Centralab Re-Polymet Mfg. Corporation-Fixed Condens-

ers, Leak and Leak Clips Poster & Co.-Drilled and Processed Front Panel and Drilled Sub-Panel Silver-Marshall, Inc .- Variable Condensers,

Coil Sockets, Coils, Tube Sockets, Ver-nier Dial, Mounting Brackets Thordarson Elec. Mfg. Co.-R200 Power Transformers

Yaxley Mfg. Co .- Rheostat, Jacks, Switch Get the hand-book at your radio dealer's. or clip the coupon and send with 25c to

S-C MERCHANDISING CO. 110 So. Wabash Avenue, Chicago

S-C MERCHANDISING COMPANY 110 So. Wabash Avenue, Chicago Herewith please find 25 cents for which send me the hand-book of the new S-C Four-Tube Receiver.

Address .....

careless-like on the grand throne and did a

Somone gave you the keys to the Treas-

I suggested that some dead grandna that he'd been imitating, had left us all a few

you're all wrong-all of you.' Mat But it sure means jack and plenty

"Finally, he spilled the dope. He had met an old guy at one of these flossy clubs who strangers and those that paid our rent. Mat slung him the old line of chatter and he ate it all up-strong. It seems his sister had wad of jack for her 17-year-old son, making the old guy keeper of the cash. Well, the old boy, being like most of us-short of kale—decides to do some speculating and using this money to do it with and not

"Mat said that he had found out that he was a superstitious old duck and thought that Madame Stella could do the trick and the old fellow asked for all the dope includ-ing the address. This all sounded like old stuff to the rest of us, and then it was buzzard had just five hundred grand that he was going to play with. That's all-just

been good and filled every stocking in sight?
Oh, I guess we did. We were every bit as happy as Mat and told him so.

piece of real change we'd come anywhere long talk with Sis. Mat and I went over that radio set, just as if there had been something wrong with it, to see that everything was set all nice and pretty for our going over her scenery, like it was the most was making the dump in general shine like a new 201-A "Well, right when the old Ingersoll told

the world that it was two bells the door buzzer did its stuff and Solly nearly broke was a gray-haired old party and if ever anybody on earth smelt of ready kale, he did. Solly parked him in the most comfortable chair in the room and then pulled this line:
"Worshipful and honorable sir, I crave

thy permission to inquire if Madame Stella

"George looked sort of dazed, but Solly to go to it, or words to that effect idea that it would be a good thing to make the old party wait awhile, which we did. dame Stella was taking her mid-day refresh-ments and could not be disturbed. Then the honorable George looked more interested

'What does she eat?' says he "That was a poser for Solly, because Sadie's favorite refreshment consists of ham and cabbage and lots of Murphys on the side



A Year From Today In Radio

Sets will get their B-Power from the light ocket—much smoother and more dependable eception will result.

Build your own B-Bliminator using Dongan B-Yower Units and the Raytheon Tube, endorsed by the leading engineers and already operating aithfully for thousands of fans.

Complete information and diagrams upon request, if your dealer cannot supply you send mensy order direct

**B-POWER UNITS** 

for Building

Raytheon Tube B-Eliminators TRANSFORMERS .

500 Full Wave \$7.00 List

20 Henry \$5.00 List Raytheon Tubes \$6.00 List

DONGAN ELECTRIC MANUFACTURING Co. 2977-3001 Franklin Street, Detroit, Mich. TRANSFORMERS OF MERIT FOF FIFTEEN YEARS



BRANT BATTERY CO. 1622 W. 16th St., Los Angeles, Cal.

BLANK" before disclosing inventions. model or sketch and description of your inven-tion for our INSPECTION and INSTRUC-TIONS FREE. TERMS REASONABLE, Elec-trical and Radio Cases a specialty.

VICTOR J. EVANS & CO.

919 NINTH ST., WASHINGTON, D. C.



# Health and happiness through radio



Each morning, young and old everywhere are adding to their store of health by doing the setting-up exercises broadcasted from many stations. Each evening radio adds to their pleasure and happiness through the dance programs.

In developing receiving sets that make the benefits of radio broadcast reception practical for everyone, radio engineers have found Bakelite to be superior for a great variety of radio parts-particularly those that are vital to clear reception and true tonal quality.

Bakelite is the preferred material for panels, dials, knobs, condens-

ers, tube sockets and tube bases.

plugs, rheostats and for other radio devices including speakers. In fact, 95% of radio set and parts manufacturers use Bakelite as they have found that its permanently high insulation value, its strength, its lasting color and finish, its immunity to injury through exposure to heat or moisture. make it superior for radio use.

It is always best to make sure that the radio set or parts that you buy are Bakelite insulated.



BAKELITE CORPORATION 247 Park Ave., New York, N. Y. Chicago Office: 636 West 22nd St. BAKELITE CORPORATION OF CANADA, Ltd.







THE MATERIAL OF

How to Make Your Own

# SPEECH AMPLIFIER

MICROPHONE Transmitter Buttons have make powerful sound transmitting elements. These very sensitive amplifiers offer every "Radio Fan" the means of building his own powerful speech amplifier. We offer here with to the constructor these special Implies.



Fig. 2, shows how the unit is attached to a telephone receiver. The first procedure is to mount the unit on the diaphragm of a telephone receiver, which usually is a high resistance telephone, either 1,000 or 1,500 ohms.

phone, either 1,000 or 1,500 ohms.

Next we select the loud speaking telephone.

If a low resistance telephone is available, it should have for maximum efficiency an impedance equal to the resistance of the amplifier unit, or about 10 ohms; it is connected up as shown in Figure 3.

A 5 ohm telephone receiver is used in this circuit with a 6-001 storage battery.

with a evolve designed waters. The very designed waters of Two telephones to the first good of designed waters and the second correction, are employed in Fig. 4, por a strong correction, are employed in Fig. 4, por a strong correction, and the second control of th

Fig. 5 shows a circuit for further increasing the volume of sound. This is simply two of the two properties of the control of the control of the This arrangement is highly sensitive and the telephones on which the units are mounted should be spacked in a box of cotton, as the slightest vibration or sound its the room will be picked up and loud talker may be used in this particular circuit.

THESE and innumerable other interesting pliffers. Every amateur should have at least one or two in his "Lab" or workshop. A four-page instruction pamphlet is sent with

PRESS GUILD, 66-R W. Broadway, New York City, N. Y. Enclosed find 85c—\$1.50 for which send

Address State.

and that didn't sound like the kind of a meal that dealers in dead spirits ought to have. Solly did some fast brain work and blats out that Stella usually are a peach or an apple or a few grapes for luncheon.

"But to get on with the story. Old Georgie comes slow into the mystic room following the salaaming Solly and from my dugout he looks as if he was properly impressed with the whole works. Solly parks him careful in the easy chair and brings the lamp with the mike in it near by and they is all set for the party.

"With whom do you wish to communirate?' says Sadie as a starter.

"With my sister, who died a year ago,' answers George, as though he was just calling her on the phone.

"Then to make it look hard, Sadie does that it is not been as the same and the same and the same are said to be said

arrying-on generally and George looks nore impressed than ever. Finally I shoots in the receiver and Mat starts in to do his tuff.

"I'm not going to try to tell you all that

have the heart to do much of anything escept wait for the George to turn up again. And he did. Just three weeks later we gets another letter asking Madame Stella for big-bearted and slips him a date as per invitation. He comes right on time, as he did before and Stella don't keep him waiting none this trip. No, sir, Solly shows him without further waiting. "Mat in his answer what stock he should

buy this time, as he had made a nice fat profit out of the other deal, told George to buy and buy heavy of a stock that we better the stock of the s

"In the middle of a sentence the door buzzer busts in, real insistent. Inside we beard Solly trying to shut somebody up, but then we heard a nice heavy voice like a bull saying. Well, young fellow, you'll let me in!" Then I did shut off the railio, just and there's Solly trying to hold back a wildeyed young fellow and TWO COPS!

"There was lots of talk and as soon as George B. Strong sees the young fellow he goes a real nice lemon shade around the

gills.

"Walter,' says he, 'what are you doing here?'

"Walter comes back with the old one,

Walter comes back with the old one. 
"Well, to make a long story short this young boso Walter is a radio bug and the same as us has been playing around with some properties of the properties o



RADIO SET MADE

# The RADIOGEM

and note expensive. A crystal recording recommendation of the control of the cont

THE RADIOGEM CORP. 66-R W. Broadway New York City

# MORE PROFITS for the Professional SET BUILDER

SET BUILDER

We have an unusually interesting proposition to make to the man who is now building (or

has the ability to build) radio receiving sets for resale. This is a real opportunity. Write today for full informa-


Gearhart-Schlueter Radio

Corp., 715 Voorman Avenue Fresno, California



Print Your Own

# The Last word in audio amplification

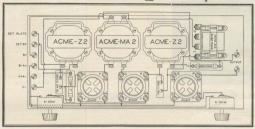

# Impedance: Transformer: Impedance

THE diagram above, wur grue you some idea of the very latest step in audio amplification. The step is the step in the step is audio amplification in working on proper lyministic of experience in working on proper amplification —the problem of "How well you can hear." Whether you want to get a distant station or one right around the corner, the main thing is "How well you can hear." Today's broadcasting demands clear, understandable, full-noted music and voice. All the greatest artists are on music and voice. All the greatest artists are on want to miss a note or word, nor do we want this music or these speeches

distorted in any way.

You will probably remember the football game or the prize fights which was spolled for you right in the most exciting part simply became announcements or they were so muffled you had to strain to hear. Amer createrf work has been confined to audio amplification and reproduction and there you find the production and here you find the confined to audio amplife using the complete using the complete was and transformer coupling with over-

all amplification greater than two transformers, and far superior in quality, no matter what the type of transformer used. Whatever set you have, just add this amplifier to your detector and notice the difference.

### Send for wiring diagram

A complete working diagram of the above chart will be sent you for 25c in stamps or coin. It is easier to follow than the plainest road map. With this chart we shall be glad to

send you free a copy of "Amplification without Distortion," a famous radio book over 300,000 radio fans have found helpful. It rells the whole overcome. In it also is complete information on the famous line of Acm prodformers, amplifying impedance, the new Acme. "double free-edge new Acme B-diminator, Use coupon below for con-

cone" loud speaker, the new Acme B-eliminator. Use coupon below for convenience. Acme Apparatus Company, pioneer radio and transformer engineers and manufacturers, Dept. K14, Cambridge, Mass.,

Amplification without Distortion



the Acme MA-2 Tran former, price \$5, and t Acme Z-2, amplifyi impedance, price \$4, Bo look alike, yet both ser a zeparate purpose, Yneed them both.

# ACME ~ for amplification

ACME APPARATUS CO.	
Dept. K14, Cambridge, Mas	
Gentlemen: Enclosed find	25c (stamps) (coin) for which please
	shown above and a copy of "Amplifica-

Street

..... State..

A Scientific Instrument House of International reputation offers for the first time direct to the public an improved S.L.F. Variable Air Dielectric Condenser





Made of the best materials obtainand the best grade of brass. Besides the materials used, the workmanship is that of instrument makand several features of decided merit are embodied in this Condenser, among them being the improved calibration curve.

### The S. L. F. Condenser that takes no more room than old types

The popular "straight-line frequency" calibralon gives too rapid a capacity variation near
naximum capacity to permit convenient tunng for the longer-wave-lengths. This will be
uppreciated by radio fans, who appreciate the
preciated by radio fans, who appreciate the
solutions and equal facilities of tuning over the
ntire frequency band. Its compactness is appreciated, due to the fact that most of the

present-day "straight-line frequency condens-ers" have narrow, pointed rotor plates of small area, which require a large number of plates and give rise to an extravagant rotor sweep, so as seriously to crowd the other parts of the set. In our Condenser the eccentric semicircular plates, which gives the improved cali-bration curve, has a substantial area and only

### Special Features

Individually fitted bearings, allowing no side or end play.

Highly developed crimping process insures good bonding between plates. All plates centered, due to rigid assembly and inspection

Sold only on a cash with order basis, money returned if you are not more than satisfied that they are exactly what you want and equalled electrically or mechanically.

Price \$2.75 each Set of three, \$8.00

Sent by paid parcel post anywhere in U. S. A.

THOMPSON-LEVERING COMPANY-Radio Division 353-357 NORTH 57th STREET

PHILADELPHIA, PENNA,



### 100 AMP, RADIO BATTERY

Rubber Case TWO-YEAR Written Guarantee by THOMAS WITHERBEE

Send No Money

This is an actual 100 amp. Radio Storage Battery honestly built of purest materials by real battery builders. Solid Rabber Compartment cases—and used from leakable)—will outlast the battery itself. Lead coated carrying handle. Wing binding pasts.
Will operate the average 5 tube radio set from three to four hours daily for a month to six weeks.

NO DEPOSIT or Advance Payment Required Simply order—and we will also by express and you can ex-ine battery at your express office to your hear's content. If a agree with us that hi's the biggest offer ever made—pay the pressurant [9, 18] object express charges.

THOMAS BATTERY CORP., 511 West 50th St., New York, N.Y.

for more tips, he starts to trace us down with the help of a little direction-finder that he had rigged up. They only lived about three blocks from us and it didn't take him very long to find out just where we were and then he got a couple of 'the finest' to come along as persuaders in case they were

Only tell me one thing, how long did you stay in the coop?"

Pat laughed. "You sure do like to ask funny questions. Who was going to appear against us? We fixed the cops with a good the clubs he belonged to. Oh, we skipped out of that all rightee, but the only trouble of the old man's five hundred grand. gosh, it's a tough life, ain't it? I chances for another scuttle of suds?"

### Shielding Radio Receivers Gains Favor (Continued from page 1442)

During the last year the toroidal coil has been developed so that it is now possible to prevent inter-stage coupling, or at least reduce it considerably, without having to shield the stages separately. At the same time, toroidal coils do not couple readily with outside systems, so that there is not much likelihood of a receiver using toroidal

In making a choice of methods for reducing interference and inter-stage coupling, all

An interesting method of shielding has

per cans being used for the purpose. The of the coil, so that it seems that there is a considerable amount of wasted space in the It is oftentimes a mistake to shield some

parts and neglect others. Many times the wiring from the batteries, at some distance tery wires into a cable, and then slipping the cable into a brass or copper tube. Another and a cheaper way of doing this is to wrap the cable with copper foil or tin foil, tying The shielding should always be grounded, otherwise its effect may be lost,

It seems to the writer that the days of shielded; next season, or at least the one



Interesting Facts About Beldenamel Aerial Wire

Made in 100 and 150 feet lengths to avoid splicing for lead-in wire.

Furnished in distinctive striped carton that is a safeguard against substitution.

Endorsed by leading radio engineers as the best and most efficient aerial.

of baked Beldenamel. The enamel coating prevents corrosion of the wire surface, and thereby offers a low resistance to the antenna current.

Ordinary bare copper aerials corrode, and the volume and range of the set decreases. A Beldenamel Aerial never corrodes, and therefore the volume and range are not diminished by corrosion. Try a Beldenamel Aerial, in place of your old aerial, and hear the difference.

Mail the Conpon for Free Illustrated Booklet

BELDEN MANUFACTURING CO. DELDEN MANNOFAN FURING C. 2314M South Western Ave., Chicago Please send me your booklet entitled "Helpful Hints for Radio Fa

Bolden

# NATIONAL Velvet Vernier DIAL Type B, Variable (Patent Pending)



Positive Control-Easily Mounted

VOU control the reduction ratio with this new NA-TIONAL Type B, Velvet Vernier Dial. And what a difference in the tuning of your set! You'll be astonished.

Easily mounted on the 1-4 in. shaft of any standard type of variable condenser. A screw driver is the only tool you need.


It has the same velvety smoothness, the same freedom from backlash, the same mechanical drive as the NATIONAL's famous Type A dial.

Write for Bulletin 109RN

# NATIONAL COMPANY, Inc.

W. A. READY, President

110 Brookline Street, Cambridge, Mass.



There is no question about the Miles per Watt with ESCO-it is the maximum Two unit four bearing set. Furnished with ring oiled or ball bearing Motor to supply. This "ESCO" set delivers 1000 volts, 300 watts for plate supply and 12 suit local supply. This "ESCO" set delivers 1000 volts, 300 watts for plate supply and 1 volts, 150 watts for filament supply. This set driving two 50 watters will make a got

## ELECTRIC SPECIALTY COMPANY

Manufacturers of Motors, Generators, Motor-Generator Sets, Dynamotrs, and Rotary Convertors for all radio purposes. Have you got your copy of Bulletin 257B and ESCO Filter facts? If not, write for them.

TRADE 'ESCO' MARK

211 South Street Stamford, Conn. Get an "ESCO" Maximum Miles per Watt POWER supply and you'll need a globe for

RADIO PANELS OF GENUINE BAKELITE mailed on request.
STARRETT MFG. CO. 520 S. GREEN ST. CHICAGO

### YOU CAN GET breater reflex or crystal set BROWNLIE VERNIER DETECTOR \$2.00 At your dealer or Direct. ROLAND BROWNLIE & CO. 20 Baunders St. Medford, Mass

after that, may see all the factory-built sets shielded. It is desirable that this be done. not only to facilitate proper design and uni-formity in the receivers, but for the purpose of simplifying and improving the operation Inter-stage coupling, body effects, critical tuning, interference from locals, and many other evils will be corrected by the proper

### The Passing of Canned Music (Continued from page 1423)

have recently announced improved instruments of this type. In addition to the changes made in the record and the horn, there has also been produced a new and greatly improved type of diaphragm to which the needle is attached. The result is almost

The music obtained from these two new instruments is no longer "canned music," but

This marked improvement in the quality of music which can be reproduced in the in which pure science can be applied so as to benefit the public at large.

### A Duplex Crystal Detector Hook-up (Continued from page 1435)

should be twice as great, and connected in parallel. Furthermore, the hook-up shown A and B can be connected to an ordinary In closing, it may be said that in Austria

experiments to increase the efficiency of the crystal set have been carried out to an exthat more radio amateurs will work along this line. It will be of great value to the public to discover improvements, previously

### Radio Makes Isolated Lives Happy

(Continued from page 1398)

Truly. I believe that the above mentioned values have been those most eagerly sought after in the United States. We are seeing the results now, as millions of young people are crowding the schools and colleges, concerts, etc., and the automobiles are bringing millions of people to the small town for the

America is a very hard-working country; both men and women on farms and in small both men and women on tarms and in small towns labor very constantly and even exhaustively. They need and develop an almost violent appetite for amusement. If they didn't, they wouldn't be able to stand the pace. It is well known that for a period of fifty years or more before the era of the farms, especially among the women. The

IN GREAT CITIES TOO

I am drawing a picture of this situation on the farm and in the small town. But many

# Light to see— power to hear



When you buy a Prest-O-Lite Storage "A" or "B" Battery for your set, you are not only saving money because they cost less, but you are buying radio batteries that are made by a company with over twenty years of manufacturing experience.

Prest-O-Lite maintains the world's largest electro-chemical research laboratories. From these laboratories have come the wonderfully efficient Prest-O-Lite Radio Batteries. Made especially for radio, they deliver their rated capacities at full power.

Ask for Prest-O-Lite Radio Batteries. They may be purchased from \$4.75 up. It is no longer necessary to take chances with batteries of unknown make. You will find Prest-O-Lite dealers within earshot of your own loud speaker.

THE PREST-O-LITE CO., INC. INDIANAPOLIS, IND.

New York San Francisco
In Canada: Prest-O-Lite Company of Canada, Ltd
Toronto, Ontario

### Send for free booklet

"What every owner of a radio should know about storage batteries" is little booklet which every radio fan will find interesting and helpful. It is crammed full of hints that will bring surprising radio results—and save you money. It's yours for the askine—without oblication.



Designed especially for radio

Prest-O-Lite

STORAGE BATTERIES FOR MOTOR.CARS AND RADIO



# COUNTERPHASE SIX

Judge It by RESULTS

Results only determine the popularity of a receiver. To say that the Counterphase is popular is putting it mildly. A comparatively short time ago the Counterphase was unknown. Its introduction with Bremer-Tully's word that it was better than the famous Nameless, was enough for the progressive American radio fan. It became popular over night because it did what B-T said it would-

### and WHY SHOULDN'T IT



3 stages radio frequency B-T patented method. Last word in selectivity. May be used with 15-foot indoor aerial. Only two tuning con-

Thousands of testimonial letters attest its right to leadership—Essential parts are available in kit form-

No. 6 kit for 6 tube sets.....\$38.00

No. 5 kit for 5 tube sets...... 28.50

"BETTER TUNING"

an interesting booklet containing 68 pages of straight-to-the-point radio facts. Don't miss the 9th edition-just out! Price 10c-Circulars free.

# BREMER-TULLY MFG. CO.

532 So. Canal St.

Chicago, Ill.

# Goodrich vertown Radio Panels

For greatest range and selectivity

- 1 Easier to drill and machine.
- 2 Better color, lasting lustre. 3 Lower free sulphur-no discoloration.
- 4 Higher softening point—no warping.
- Goodrich V. T. Sockets Spaghetti Tubing

Radiophone Ear Cushions

**Battery Mats** Hard Rubber Tubes for Coils

The B. F. Goodrich Rubber Company Established 1870 Akron, Ohio

\$1.50 FOR YOUR OLD RADIO TUBES regardless make or condition, toward purchase SUPER-SERVICE LABORATORIES, Dept. 55 Room 58, 39 West Adams Chicago, Ill.



problem. Without servants, imprisoned in small-sometimes almost intolerably smallapartments with babies and small children to care for, these women have known lone-

The plain, blunt truth is that until radio came, the average woman with children, the woman living in the country or the small her spirit and pushed her into mental infer-iority. What else can happen when there is spring, and no amount of fine theory can dispute it. She is limited very largely to her own home.

All our theories of helping this woman-

MEN'S TOY AND WOMEN'S HELPER A great many people, therefore, have not

how humble, or where located-the best that To men it has meant largely the thrill of invention: to women-who accept invention more as a matter of coursethey loved the scientific marvel of the in-strument; their passion for DX thrill kept it up; and the broadcasting material grew

for distant stations, she—always the practi-cal and utilitarian—began to notice radio—

Rich people know radio as another luxury,

proclamation of emancipation from isolation, The telephone was supposed to have been such an emancipation, but it never has been except for emergency. The phonograph was also supposed to be an emancipation, and it cipation, and it has gone a long distance in that direction; but when you come right down to cases it simply permitted farm folks to go to the nearest small town, and small town folk to go to the nearest larger town

There isn't the slightest possible real com-

RADIO A CREATOR OF TRADE

It is worth while, too, to note what radio is doing for the business world, in relation to average women. As every student of business knows, it is not money, but desire for things, which makes trade. Misers make no trade; nor do people work to earn tronge, who have no desires. Desires do not grow naturally; they are stimulated. Mail order catalogs used to do a lot of such stimulating

Radio is stimulating desire and enlarging



# A New Development Insures Remarkable Radio Reception

The only Eliminator with a variable control on Radio Frequency

One Power Control for Audio Tubes from 90 to 180 volts.





R. E. Lacault, our chief engineer, has had a real-honest-to-goodness "B" Battery Eliminator developed to meet his own exacting requirements and he has authorized us to guarantee this Eliminator without any reservations.

Here is a "B" Battery Eliminator—a real Eliminator—Endorsed by one of the foremost Radio Engineers of United States and France. And, it is sold on a money-back guarantee basis,

It will deliver ample "B" Battery current supply to operate any radio set from one to ten tubes; and is particularly efficient when applied to neutrodynes, 8 and 10 tube super-heterodynes and Ultradynes L-1, L-2 and L-3.

No Hum No Recharging

No Leaky Cells No Spoiled Rugs

No Battery Replacements

No Bother

Remember your first cost is the only cost and your "B" Battery troubles are banished forever. Nothing to wear out. The unit is compact and of rigid construction. Just plug into your electric light socket and you have topnotch "B" Power at your service. The current consumption is negligible; but the receptive qualities of your receiver will be improved to a marked

Don't just take Mr. Lacault's word for this-as this Eliminator is sold on a money back basis—Simply send us your order and we will forward the Eliminator by express C. O. D. Test it for five days and if it does not do all we claim—return it to us and your money will be cheerfully refunded, without question.

This new "B" Eliminator will save you money-save your temper-and will give you much pleasure in the efficient way it operates. Clip the coupon—Don't delay.

# 5 DAYS FREE TRIAL

PHENIX	RADIO	CORPORATION	

4 East 25th St., New York, N. Y. Gentlemen:-Please send me C. O. D. plus shipping charges, one "B" Battery Eliminator, approved by Mr. R. E. Lacault.

110 Volts, alternating current, 60 cycles, complete . . . . . . \$55.00 It is agreed and understood that if the eliminator after it is received by me, is not satisfactory, I will return it within five (5) days, and my money will be refunded without question. (Or) I enclose full remittance herewith and you are to pregay express charges.

"B" Eliminator for D.C. Current is ......\$25.00

# RARKELEW

# Lightning Arresters





No. 602 Price \$2.50

OUR No. 602 Lightning Arrester Switch is universally recognized as the only device on the market which combines on one base all those

The Vacuum tube arrester is permanently in the circuit from antenna to ground, ready to "spill" any overcharge. With the switch blade the antenna may be disconnected from the radio set and thrown directly on ground. It meets not only the requirements but also the additional recommendations of the National

Our No. 606 Vacuum Tube Lightning Arrester is less expensive but it me ts all the actual requirements of the National Electric Code. Both are Approved by the Underwriters'

See our Radio Catalog at your Dealer.

If he hasn't his copy, we have one for him.

The Barkelew Electric Mfg., Co. Middletown, Ohio, U.S.A.

W YORK, 157 Chamber St.

CHICAGO, 15. R. Clinton St.
DENVER, Deshatan Beig.
DENVER, DENGER, DENGER

3 TYPES-ONE QUALITY,

20 to 80 20 to 80

THE BEST



LIGHTNING

ARRESTER

Vacuum Tube Type

No 606 Price \$1.50

# it's in the TUBE

Y OUR receiving set can be no better than its tubes. CeCo Tubes give volume and long life.

Our charted tests (results confirmed by ITY—as detectors, as amplifiers. Buy CeCo Tubes whether your set takes one tube or eight.

Now ready! CeCo Tubes with new type Long PRONG BASES. Also, power amplifier tubes, E (Dry Cell Type), F (Storage Battery), for last stage of Audio Frequency. Ask your radio dealer.

C. E. MFG. CO., INC. 702 Eddy Street Providence Providence, R. I.



Velte 5.0 Current 0.25 tage 20 to 120

U. S. TOOL S.L.F. CONDENSERS work with a smoothness that prevents skipping by any station. Equally effi-cient under all conditions. AMPERE, N. J.

U. S. TOOL COMPANY, INC.

LATEST WHOLESALE RADIO CATALOG deelers and agents transcu. 1408 Walnut, Kansas City, Me

MARKO RADIO BATTERIES ALWAYS DEPENDABLE

MARKO STORAGE BATTERY CO. Brooklyn, New York BUILDING A SET?



mental horizons, which always means enlarging the desire for possessions. Pianos and musical instruments, books, new foods, being bought to a larger degree by women who hear what is being said over the radio. where-which means more work and more And women are happier, healthier, and more up-to-date; that is the biggest item of

# All About Toroid Coils

From this chart the number of feet of line shown indicates the number of feet of are taken from the curves of Fig. 3 and plotted in Fig. 4. The broken curve of Fig. 4 indicates the overall diameter of the applies to coils having a coil diameter of two inches, and the turns are wound closely at the center. It does not apply to coils of Resistance," dealing with cylindrical coils. In Fig. 5 we have shown the effect of varying the turns close at the center, without different coil diameters to furnish given amounts of inductance.

In Fig. 7 we have a very interesting effect shown, the effect of the internal diameter (or ring diameter) on the inductance of (or ring diameter) on the inductance of toroidal coils, all the coils being wound of 160 turns of No. 22 wire, and having a con-stant coil diameter of ½ inch, shown by the curve. It will be noted that the smaller the internal (or ring) diameter, the greater is the inductance, for a given number of turns, wire size, and coil diameter. As a the internal diameter at which there is no line the turns are spaced; to the left they are bunched together,



258.5 Meters - 1160 kilocycles 230.3 Meters - 1100 Knocycus is owned and operated by the publishers of this magazine Our Editors will talk to you several times every week-See your Newspaper for details TUNE IN ON

Again Pilot shows the way

TRIPLE CAPACIGRAD



NEUTROGRAD



NEW CAPACIGRAD



FITALL UNIVERSAL SOCKET









# dial for finest tuning

Once again PILOT has achieved a master production for radio set builders and users-a new, improved vernier dial (ratio 10 to 1) which makes fine tuning not only possible, but simple. Readings are marked for both degrees and kilocycles. Made of genuine bakelite that is moulded in the Bakelite Department of the great PILOT plant where everything is made from Raw Materials-the world's greatest parts manufacturer.

This beautiful, sharp-tuning dial can be purchased at all S. S. Kresge stores. If there is none near just send one dollar by postal money order and we will mail you a KILOGRAD direct.

Pilot Electric Manufacturing Co., Inc. 323 Berry Street Brooklyn, New York

# Under Ground Antenna

Successful Thru Performance Filters Reception

\$1 450 Results Guaranteed Radio Reception through the ground eliminates Static and Power Line interferences you are now picking up on a loop or outside aerial. Your set is more selective cutting out powerful local stations that are interfering with distance—Plenty of Volume—in not Directional. than an outside aerial—works on all circuits. Mail coupon today for Pitts' Under Ground Antenna with full directions and Written Guarantee.

CUR TROPES

DEALERS, JOBBERS, WRITE FOR PROPOSITION!

Ernest Walker Sawyer-Factory Representative

OSBORNE-KELSEY CO., 1915A Santa Fe Ave Los Angeles, Calif.

Enclosed is money order (or check) for \$4.50—seed one Pitts Under Ground Antenna with full directions and Written Gnarantee, for which I will pay \$10 (balance of cost) upon receipt.

Name

Address. Cay. State.

# MAKE YOUR BATTERYLESS &

We will tell you how to make any set oper- ate perfectly without A, B, or C Batteries for

You can now make an Electric Light Socket Radio Receiver out of any battery operated to the state of the stat

Anyone—you, your battery-charging, electrical and radio service man or dealer—can make in the properties man or dealer—can make in the properties of the pro

tested and endorsed by Popular Radio Radio Broadcast, Radio News and all highest and leading authorities, and engineers, as being powerful, practical perfect, dependable and constant in per-

TOTMANCE.

REMEMBER YOU DON'T HAVE TO JUNK OR THROW AWAY YOUR OLD SET OR PARTS, THEY CAN NOW BE MADE INTO AN UP-TO-DATE ELECTRIC RADIO, THE LATEST AND BEST IN RADIO PERFECTION AND PLEAS-

URE.

Send \$1.00 and we will mail you booklet
containing 29 new and hitherto unpublished diagrams, information and literature, showing how to transform any old
or new radio set, circuit and parts into an
Electric Radio.

POWEROLA RADIO CORP. (R. N.) 1845 BROADWAY NEW YORK

# 100 Volt Storage "B" Battery for \$1000!



704 East 102nd Street

\$14.00

\$16.00

Everybody can now enjoy the benefits of Storage "IP. Batteries-more power, quietr reception, greater economy. Rubber case prevents leakage or shorting. Easy to recharge. Will last for years with ordinary care. SERVICE Ruchargable "B" Batteries in all-rubber cases to VOLT \$5.50

Vol.75 \$10°0 125 VOL.7 \$12.50

Prices in Canada VOL.7 \$7.75

100 \$14.50 125 17.00

Cleveland, Ohio

SERVICE BATTERY CO. of Canada, 137 Ronesville Ave.
SERVICE BATTERY CO.

CHARGER
Charges 6-rolt "A"
or Auto Batteria
or 19 Battery 10
SERRIES, Noiseles
in operation. Es
trensly cessonaled
The height of cen
renferre.

SERVICE

Complete withBulb \$14.50

Insure your copy reaching you each month. Subscribe to Radio News-\$2.50 a year. Experimenter Publishing Co., 53 Park Place, N. Y. C.

# Regarding Noises

(Continued from page 1446)

duce something that sounds more like a Unlevelen one bin anything else. However, an M.G. set can and should be filtered as the set of the set of the set of the limit of the set of the set of the injustices of the set of the injustices are set of the output of the M.G., as in Fig. 2. We show output of the M.G., as in Fig. 2. We show output of the M.G., as in Fig. 2. We show output of the M.G., as in Fig. 2. We show output of the M.G., as in Fig. 2. We show output of the M.G., as in Fig. 2. We show output of the M.G., as in Fig. 2. We show output of the M.G., as in Fig. 2. We show output output of the M.G., as in Fig. 2. We show output output of the M.G., as in Fig. 2. We show output output of the M.G., as in Fig. 2. We show the M.G. as in


seneral, let us mention that no matter what kind of a filter system you me, you will not kind of a filter system you me, you will not set is properly tuned. The best brute-force filter will not belt you, if you do not fixes for the will not belt you. If you do not fixes the will not belt you if you do not fixe until the you had you will not not until the you best operating position is ascertained. Therefore, see to if that your sites: a good filter and a properly-tuned onsition is good filter and a properly-tuned ontion of the your will not all positions of feeling. Incidentally, you runt and all position feeling, Incidentally, you runt and all positions of quites new wall appear faster than ever.

### WHERE KEY CLICKS ORIGINATE

Now let us find our something about these yellocks that the neighbor complian about every one in a while. Probably there are avairable severy one in a while. Probably there are various sections of this country by the methods illustrated at X in Fig. 3 than in any part years of the part years are part part years and years are part yea

that your oscillator tubes will hat longer. Any method of knying that allows the high voltage current to remain applied to the voltage current to remain applied to the control of the con

Some folks are going around, and seemingly trying to scare hams out of the practice of using primary keying, by saying that if you do so and are using good brute-force filter

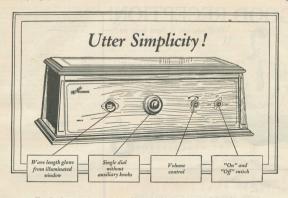

How free from complications is this radio panel. It has but one tuning dial, a volume control and a switch for "on" and "off." The merest amateur can tune as accurately and as quickly as an expert. He does not have to grope around adjusting dials. He turns IMMEDIATELY to the wave length desired. It is ILLUMINATED; you can read it in the dark.

# The Real Secret of Tone Beauty

(It Is All in the Overtones)

ANYBODY can build a complicated radio receiver. The marker is full of them. Simplicity is the secret of everything most desirable in a radio set—TONE QUALITY above all. The more devices and adjusters employed, the more interference there is with the delicate flow of radio energy in and between circuits. The least disturbance of the wibtations which make overtones bluss the tone.

The tone beauty of the PFANSTIEHL "OVERTONE" receiver is due to its ultra simple design, its freedom from electrical errors and from the devices necessary to adjust them. Music or human speech is received and reproduced exactly as transmitted, with all of the tone color which invers them with individuality and charm

The same freedom from extra dials or adjusters also enables a very graceful looking panel to be designed. There is nothing to clutter it. The inside is just as clean-swept as the outside: there are no hidden adjusters or extra witing to complicate operation.

Hence you get

Matchless tone-single dial tuning-graceful design in the





MODIL 10c—A complete 6fube Single-dial Console Overtone Receiver with Overone Speaker, Control Board, Sattery Charger and Compartnents for Battery built in,



6-Tube Receiving Set demountable Console d. Overtone Speaker in. Price \$200.00 (less

Other 5-Tube Models \$85 to \$135 Exclusive Dealer Franchise

# GOOD RECEPTION!

Will you get it from now on? WEAK or sluggish radio reception is usually the fault of tube filaments. Run down tubes used night after night are bound to give poor results and even a new tube may not be up to standard.

You can now measure tube strength!

Sterling R-403 Tube Reactivator rebuilds the tube fila-strength. The meter on this reactivator permits you to i instantly the strength of any thorisated filament tube be-and after treatment. You are not guessing. The pro-can be repeated over and over.

Test your tubes often and reactivate them only when they need it. That's the Sterling "metered" way, Be ready for the best this summer. Read Meter Ask your dealer-for a STERLING! Its price is only \$12.50 (50-60 cycle) \$14.00 (25-40 cycle)

TUBE REACTIVATOR

THE STERLING MANUFACTURING COMPANY Obio

when

you have done everything to your set and yet you don't get Results - try

EROVOX

FIXED CONDENSERS

Tested and approved by M. I. T., Yale, Radio News, Popular Radio and Popular Science. Used by over 200 of America's leading set manufacturers.

Made in all capacities. Also manufacturers of Grid Leaks, Accuracy plus Quality

AEROVOX WIRELESS CORPORATION 489-491-493 Broome St., New York City

Have your tubes tested on the Superadio-Dynometer MODEL 5 WATCH FOR THE B and C De Witt-La France Co., Cambridge,



13 Results

Immediate Shipment from Stock
HAVE MERCHANDISE
WHEN YOU NEED IT
Catalog 466 S is free to dealers LUDWIG HOMMEL & CO

Insure your copy reaching you each month. Subscribe to Radio News-\$2.50 a year Experimenter Publishing Co., 53 Park Place, N. Y. C.

your sigs will acquire little tails, that will make them hard to read. True enough, these little tails will be found under certain conditions; but these conditions are very easy to eliminate and once this is done, you can key in the primary and use a brute-force filter without any trouble whatsoever. The filter without any trouble winatsoever. The method of eliminating the tails is to tune your set properly. It will be found that this can be done, in a way to eliminate entirely the little tails, and the results will be

And so fellows, here is some dope for you. Go to it, and see if you can't stop some creating. We hope that those who read this, and are not creators of noise, will not take offense. The dope is given in the spirit of helpfulness; and if it accomplishes its purpose of removing some of the burn notes and bad key clicks from the air, we

# The Fugitive

(Continued from page 1403)

FRANK: He held me up and tried to take my car-he turned for a moment. I knocked him out with a wrench and turned back to Lindsay with him, There they told me that he had killed two already today-I've been

ALICE: And weren't you afraid? FRANK: Yes, I was afraid he'd take the

FRANK: I get that tomorrow-they took my picture for the morning papers, too. ALICE: And you get a thousand dollars,

This entitles Mr. Taylor to the State's one tion! (music goes on again.) ALICE: Frank, you're the most wonderful

but you must be hungry-I'll have supper ready in a minute for you boys, FRANK: Alright dear, I'm hungry, alright.

new year right! Listen to that jolly racket outside-everybody's happy tonight alright. FRANK: New hats for Alice, toys for the

boys, and a bigger radio for the house. ALICE: Come boys, sit down, I'll have your supper in a hurry

FRED: Ha! ha! ha! Then, Frank, we cer-certainly can hope for a Happy, a Prosper-ous, and a Radio New Year. THE END

### I Want To Know (Continued from page 1456)

The filter coupler may consist of two 1,250-turn honeycomb cells, mounted as shown in Fig. 2405.C. diameter and 254 inches in length. 1-2 is the winding on this table, and consists of 75 turns 2004. Soft, 50th 50th and 75th turns. The rotee oil is placed within this and measures 115 inches mounted of winding and assembling the cell is shown in Fig. 216-D. The antenna coil consists of 100 turns of No. 26 or 28 1.08.C. or D.C.C.





"TRUTH IN RADIO"

## Synchronized, Single Master Control Gives Greatest Simplicity of Operation

Ever since SOMERSET Radio made its ap-pearance two years ago, these beautiful sets account of absence of extravagant claims. SOMERSET Standish Model 4G achieves ab-solute simplicity in operation, One synchrosized solute simplicity in operation, One synchrosized stations. A vernier control underneath the large dual is used only when listening to distant sta-

This is a 4-tube set entirely enclosed in an antique mahogany, two-tone, beautifully inlaid cabinet, with bullt-in Utah Loud Speaker, the best that money can buy. There is space for both "A" and "B" batteries in this large cabinet. Not just a cabinet, but a perfect piece of furni-

ture. The total size of the cabinet is 281/2"x

Storage batteries or dry cells can be used. Standish Model 4C operates from 200 to 600 meters. There is an automatic filament control, eliminating chances of burning tubes too brightly and does away with extra controls.

Straightline Frequency condensers of the latest type do away with crowding of the short-waye stations.

This receiver is the best and most pleasing model of the SOMERSET line of modern radio receivers. It is handsome, powerful, and practical throughout—built by men who have been in the radio business since 1908.

S	peci	al l	Deale	er	3
FR	Al	VC	HI	SI	E
Extra	valuable	dealer	franchises	for !	Ne

SOMERSET RADIO CORPORATION 113-119 Broadway Brooklyn, N.

	1
***	1

F		
i,	SOMERSET RADIO CORP.,	
÷	113-119 Broadway, Brooklyn, N. Y.	
- 6	Condense Visite and a second to the	

Name .....

Address .....

City, State

Special Dealer franchise.

# HEATH "RADIANT"



# 3 Stage Resistance Coupled Amplifier Gives Natural Tone Quality

The Heath 3 stage Rectinance Coupled Amplifer 1, the bighest type of audio amplification. It upplies pure, undirected tone to your load appealer and gives a high enailty of reception you never thought possible. Accommodates either Vow or UX type these. Suitable wherever Resistance Coupled Amplification is requirementally appealed to the companies of the companies of the coupled and the coupled amplification is required. The companies of the coupled that the coupled amplification is to provide the coupled and the coupled amplification of the coupled amplificatio

Made by Makers of Heath "Radiant" Condensers.
HEATH RADIO & ELECTRIC MFG. CO.
206-208-210 FIRST ST.
NEWARK



the Filament of your Tubes

and 739 describing these two new instruments designed for new Radiola, Victor and Brunswick Sets.

Order from Dealer

JEWELL ELECTRICAL INSTRUMENT CO.
1650 Walnut St. Chicago

"26 years making good instruments"

# You Will Make a Big Mistake

If you buy a radio cabinet without first getting our free catalogue, Made in hardwood mahegany finish or solid black walnut. Choice of 7½ or 10 inch depth same price. Full length piano hinge and lid support, both nickel plated. Baseboard free. Beautiful cabinets in rubbed finish. We sell Loud Speaker cabinets complete with grille and silk ready for your favorite unit.

The Southern Toy Company, Inc.

Hickory, North Carolina

Insure your copy reaching you each month. Subscribe to Radio News-\$2.50 a year. Experimenter Publishing Co., 53 Park Place, N. Y. C.

### 40 Non-Technical Radio Articles

every month for the beginner, the layman and those who like radio from the nontechnical side.

SCIENCE & INVENTION, which can be hought at any newestand, contains the largest and most interesting section of radio articles of any non-radio magazine in existence.

in existence.

Plenty of "How To Make It" radio articles and plenty of simplified hook-ups for the layman and experimenter. The radio section of SCIENCE & INVENTION is so good that many RADIO NEWS readers buy it solely for this leature.

### List of Radio Articles Appearing in the April Issue of

"Science and Invention"

Latest Radio Broadcast News.

The Radio Constructor—How to Build a

Real "B" Eliminator, By A. P. Peck, Assoc. I. R. E. A Highly Efficient Six-Tube Receiver, By L. Abrams Five Tubes With Regeneration. Radio Oracle. Radio Wrinkles.

refer women on a 2-or 3.5/cm, thus and superyear 2 stars for the first in the same and the control of the same and the control of the concover a wave-hand of from 530 to 2.20 active. The control of t

### A Balanced Tuned R. F Receiver

(Continued from page 1429)

stats. Then the wooden backeard is greated by cutting out the section immediately under the two variable condensers. The most section is a section of the backeard for the phased emporators is phased emporated by the section of the

The two inductances are wound with No. 2d D.S.C. wire on these of insulation, which are about 24s inches long and 24s inches in a substantial of the wire. With a pap at the 20th turn in one case and at the 35th in the other. The latter is the secondary of the radio fresistate of 15 turns wound on a thin strip of insulation and slipped over one end of the secondary. This is all the construction. The act the 20th of the 15th of 15th of

# BUILD YOUR OWN RADIO SET!



# Buy from Radio's oldest Mail Order House

THE NEW RASCO CATALOG No. 16 "RASCO HAS IT"

new Catalog at once.

If you will paste this coupon on a post card and mail today, we will be pleased to send you our RADIO SPECIALTY CO

98 Park Place

New York City

\$3,50



# Banish Detector Troubles with The Carborundum Stabilizing

Detector Unit

BY a turn of the knob on the
stabilizer you adjust the detector impedance to best suit
operating conditions.

You can materially reduce the detector circuit damping, thus giving increased selectivity—sharper tuning

With this stabilizing unit you get the most efficient rectification—resulting in increased

cation—resulting in increased sensitivity—greater volume. It's a simple device that solves all detector troubles.

Comes equipped with genuine, fixed Carborundum Detector. An ordinary flash-light cell for booster voltage completes the unit.

You can get the fixed, permanent Carborundum Detector alone for \$1.50 YOUR DEALER OR DIRECT

YOUR DEALER OR DIRECT
Send for Descriptive Circular Showing Hookups

THE CARBORUNDUM COMPANY
NIAGARA FALLS, N. Y.

New York Chicago Boston Philadelphia
Cleveland Detroit Cinelinanti
Pittsburgh Milwaukee Grand Rapids



# AERO-LOOP--

THE SCOTT SALES COMPANY
449 S. San Pedro St., : Los Angeles, Cal.
Nan. by UTT-WILLIAMS. SANTA ANA. CAL.



circuit, and the other is used as the radio frequency transformer.

THE OPERATION
As mentioned above, there are separate

binding posts provided for the "B" and "C" connections of the anilo frequency amplifier tubes. The proper voltage to use in important; for many times this spells the difference between good and mediocer reception and quality. It is suggested that the interest of the proper spell of the proper spell interested with his tubes and try different potentials at these points, in order to get the maximum results from his receiver. The and 3, each with a plus sign.

construction against a second with a goal and a second with a goal and a second with a goal and a second with a se



The panel view of the tuned R.F. received There are only two tuning controls, making a simple matter to pick up stations.

Outside of the usual tuning operations there is but one adjustment to be made on the completed receiver, and that is the faxing the completed receiver, and that is the faxing the complete of the completed receiver, and that is the faxing the complete of the first part of the faxing the tuning the tuning the tuning the confidence about the current of the first part of the complete of the complete

When a station is to be tuned in, the high resistance in series with the primary of the R.F. transformer is varied until the carrier waves of the stations are heard as the condenser dials are rotated. When a station is selected the tuning dials are adjusted and the resistance again varied until the whistle entirely disappears.

Following is the list of parts required for constructing the receiver: 2 coils (see specifications above).

4 vacuum tube sockets, 1 five-plate condenser, 2 variable condensers (.0005 mf.), 1 rheostat, 10-ohm,

# Make Your Own Cone Speaker - and Save \$25



Supplied)

Why pay \$35 or more for a cone speaker when you can easily assemble a splendid supersensitive one with the complete parts we send you—and save

We include a special color control consumity by the color co

faultless accuracy.

In low—only \$10 complete for the most approved form of loud speaker known. Big same to elimination of labor in assembling and packing and because we save jobbers' and dealers' profits.

Send No Money

Simply send name and address for the complete outfit. When postman brings package, deposit only \$10.00 in full payment. If not entirely satisfied return parts within ten days and your money will be instantly refunded. Never before has a better radio bargain been offered. We'the at once.

SCIENTIFIC RADIO LABORATORIES 254 W. 34th St., Dept. 44, New York City



State One Piece Report of the Control of the Contro

6 volts, 100 argus., 18.3.79 6 volts, 11 plates, 3.8.79
6 volts, 120 argus., 18.3.79 6 volts, 12 plates, 10.79
6 volts, 140 argus., 18.3.90 – 10 volts. plates, 13.40
Buy Chleacan Batteries direct from the manufactures,
Batteries you order will be hilpped the same day. Express C O D or 5% discount cash with order,
CHICAGO BATTERY WORKS

TALD Pagerie St.

Chicago, III.

# Of Your Town

Be popular. In demand everywhere. Have a Earn your welcome. Charm your friends with y BUESCHER

SAXOPHONE

nch yoursell, 3 free lissons give you y start. Try any instrument in you no 6 days free. See what you can do. ons if you decide to buy. Send no utiful free literature. A postal brings d

Insure your copy reaching you each month ubscribe to RADIO NEWS-\$2.50 a year experimenter Publishing Co., 53 Park Pl., NY.C



# BURIED TREASURE can still be found in



# Good Chemists Command High Salaries



and you can make yourself independent for life by unearthing one of chemistry's yet undiscovered secrets. Do you remember how the tales of pirate gold used to fire

your imagination and make you want to sail the uncharted your imagination and make you want to sail the uncusaried seas in search of treasure and adventure? And then you would regret that such things were no longer done. But that is a mistake, They are done—today and everyday—not on your own country. Quietly, systematically, the chemist works. wealth and honor through his invaluable contributions to hu-manity. Alfred Nobel, the Swedish chemist who invented dynamite, made so many millions that the income alone from Gayley, who showed how to save enormous losses in steel manufacture, L. H. Baekeland, who invented Bakelite—these are only a few of the men to whom fortunes have come through their chemical achievements.

### What Some of Our Students Say of This Course:



You Can Learn at Home



Experimental Equipment

### CHEMICAL INSTITUTE OF NEW YORK, Inc. HOME EXTENSION DIVISION 4

NEW YORK CITY

SS.R-WEST BROADWAY

Furnished to Every Student

# Easy Monthly Payments

Special 30 Day Offer

DON'T WAIT-MAIL COUPON NOW!

STATE.....

INSTITUTE NEW YORK send this ad with your order. World Storage "B" Batteries give you economy and perfor-mance unheard of before. They deliver unfailing power that is clear, pure and quiet, Tested and Approved by Leading Authorities. Radiocast Station

Set your Radio Dials at 210 meters for the 1000-watt World Storage Battery Sta-tion, WSBC, Chicago, On the air nightly, between 6:30 P.M. and 8:30 P.M. and 10:00 P.M. and 1:00 A.M., with intensely

with each Radio "A" and Auto Battery, WORLD Battery owners "tell their friends." That's our best proof of performance and is chiefly responsible for the tremen-

Solid Rubber Case Solid Rubber Case Badio Battorios Auto Batteries 6-Volt, 100-Amperes . \$11.25 6-Volt, 120-Amperes . 13.25 6-Volt, 140-Amperes . 14.00

### SEND NO MONEY!

Just state battery wanted and we will ship day order is received, by Express, C.O.D., subject to your examina-tion, on arrival. FREE "B" Battery is included, EXTRA OFFER - Five per cent discount for cash in full with order. Buy NOW and get a guaranteed battery at fifty per cent saving to you.

WORLD BATTERY COMPANY 1219 S. Wabash Ave., Dept. 10, Chicago

# World Batteries for Radio



# WITH THIS KIT AMATEUR SET MAKERS CAN ACHIEVE ISOFARAD The Isofarad Circuit is the culmination of three years intensive laboratory work by

The isotarad circuit is the culminator of three years measure anotatory work by Walbert engineers. Each problem was attacked from the standpoint of pundamentals and completely solved—First, greater amplification was secured, then oscillation prevention was achieved, next a coil was developed of the highest possible efficiency and formly excellent qualities. The practical result is a receiver possessing a hitherto un-

Isofarad five-tube Kit, completely assembled (but not wired) including wire and instruction book. \$ 75 Isofarad five-tube receiver complete. 125 Isofarad six-tube receiver complete. Send \$.25 for booklet-"Isofarad Revealed"

WALBERT MANUFACTURING COMPANY

923 Wrightwood Avenue CHICAGO





audio frequency transformers, ratio 2:1,

fixed condenser (.0001 mf.), fixed condenser (.00025 mf.), grid leak (2-megohm) and mounting,

variable resistance (500-50,000-ohm),

### Correspondence From Readers Continued from page 1448)

WLIB, WOK, WEBH, WSAI, KDKA, WJZ, WORD, WCCO, WMAK, and ninety

I placed a switch in place of phone jack; added a "C" battery and doubled the volume George W. COWAN, 2nd and Chase Sts., Port Angelus, Wash Editor. RADIO NEWS:

Editor, Ranto News:

I sit here listening to a Regenerative Interflex as I write. It is the clearest and best set for fone quality I have ever heard, regardless of make or price. Many of my friends who have heard it say the same thing. New Orleans (WSMB), the greated distance I have yet had, came in nicely

LEON M. SEE, Auburn Heights, Mich December 16, 1925.

## BALANCED INTERFLEX

I am glad to say that, with the Balanced

log the following stations: Station. WNYC WEAF WJZ WJY WOR length.

38

98 Parkville Avenue,

# Villa Tasso

NORTHWEST FLORIDA

The Most Beautiful Homeland in America

# BUY An Ideal Homesite

In Florida's most Beautiful Section

# VILLA TASSO

On Bluffs Overlooking Chotawhatchie Bay Northwest Florida is just being discovered. In this glorious spot, Florida's most beautiful section—50 miles East of Pensecola, on bluffs overlooking the beautiful Choctawhatchie Bay—lies Villa Tasso with its delightful Home-

A newly discovered Florida dreamland abounding in opportunities—Healthuli, Invigorating climate with pure soft water all year round. In the shadow of Magnolia, Fine, Oak, Holly and Palmetto trees, and adjoining national forest, and looping the old Spanish trail giving all the delights of site bathing beach, hunting, fishing, bosting, riding, golf, etc. Freight and Passenger Steamer Servce, Beautiful Appulaciona seemis highway teath directly considerable of the contract of the contract of the Lots average 50 x 150, average elevation 16 feet, guaranteed high, destrable for building. Now offered for three teed high, destrable for building. Now offered for three

Lots average 50 x 150, average elevation 16 feet, guaranteed high, desirable for building. Now offered for three hundred to two thousand dollars with perfect title. Prices have quadrupled in 3 years and values are rapidly advancing. Reasonable terms.

These prices are a fraction of the cost of other Florida property. Buy now for a homesite or for investment. Write immediately for information to T, V. Orr, Villa Tasso Lodge, Temporary Post Office, Bolton, Florida.

An Ideal for You on In Undiscovered Florida





AND MODEL 503

"What's Under the Hood"

6 Popular Models 6 Popular Prices \$65.00 \$160.00 75.00 170.00 85.00 180.00

Write Today for Full Information

Quality Radio Sets are Manufactured Complete in Our Large Modern Plant-

CONSOLE

INDIANA MFG. & ELEC. CO.

600 CASE BLOCK, MARION, INDIANA

# Hear Europe with the



# Universal Plio-6

# No Batteries

are required even to operate the powerful receiver pictured above, if you use the new laboratory type

Model A **Power Unit** 

A new broadcast receiver representing the highest type of efficiency obtainable in point of extreme range, tremendous audibility and remarkable selectivity.

Maximum Efficiency-Inexpensive Parts or Completely Constructed

Write for information today

### NORDEN-HAUCK, Inc. Engineers

1617 Chestnut Street, Philadelphia, Pa.

ARAWIK CO., 102-145 So Canal St., Chicago, U. S. A.



### Work for New Radio **Detective Car** (Continued from page 1401)

in power transmission lines, and one super-heterodyne covering 50 to 3,500 meters, de-signed and built by the Bureau of Com-merce. The transmitter, of 100 watts on 80 merces. The transmitter, of 100 watts on 80 meters, will broadcast over a range of 200 to 300 miles. There are 24 cells of 155 ampere-flour storage batteries. These are designed to charge from a rectifier when in the resume or from the results respectively. great weight of the storage batteries an

### The Radio Beginner (Continued from page 1411)

ammonia, but merely moisten it, so that the battery can be cleaned more readily. After this has been accomplished, cover the con nection terminals with a very thin coat of vaseline. This will prevent corrosion from taking place; but if such has already oc-curred, remove the corrosion before applying the grease. Regarding the location of storage bat

teries, do not place them near radiators or hot-air registers. If you do this, it will cause the electrolyte or liquid within the cells to evaporate very quickly and you will one is liable to stumble over it. A storage most pleasant thing in the world for your expected. Some radio set owners dispose of ing it in the cellar of their homes some where nearly under the radio set, and drillin the cellar

THE ELECTROLYTE The electrolyte in the storage battery cells

the cells diminishes; but this merely because



compact type.

Illus, courtesy Ohio Elec. & Controller Co.

water has evaporated and not because any of the acid has been lost. Therefore, order to make up for this evaporation, it is only necessary to add pure distilled water. Never add acid. The distilled water can be purchased from any garage or storage bat-tery supply station. Be sure that you get pure water and never attempt to fill your cells with water obtained from the Water that has not been distilled con tains certain mineral elements that will detrimental to the action of the storage battery and if continually used will eventually cause the battery's ruin.

cause the alterly strun.

with the aid of an ordinary hydrometer, an intrument which may be purchased at the same place that you but your distilled water, as a part of the same place that you be your distilled water, as the same place that you be your distilled water, testing storage hatteries to show how nearly testing storage hatteries to show how nearly testing storage hatteries to show how nearly a regime of the same place that the hydrometer consists merely of a springer, and the same place that the hydrometer of the same place. It is not small part. On squeezing the rubber bulb, placing hard, and the same place that the same place is the same place. It is not small part. On squeezing the rubber bulb, placing ing the shall, it will be found that a quantity of the electropies will be drawn up into the cylinder. The float will be found that one of the graduations on the scale of the float will be drawn up division denotes the condition of the float will be driving drawn as the condition of the battery.

Ordinarily, and generally speaking, when the scale reading is in the neighborhood of 1175, the battery is nearly discharged, and should be recharged. Fully charged values



Fig. 10. By using a four-pole double-throw switch, the battery and charger can be automatically connected and disconnected and thus the use of flexible leads and clips is elimin-

vary from 1,290 to 1,200, but it is rare that an 1,275. This will be found to be a quite satisfactory limit for all ordinary purpose, stackory limit for all ordinary purpose, so that the satisfactory limit for all ordinary purpose, your hastery with the hydrometer, going over every cell at each test, you can determine just about when it is necessary to durge put the lattery on charge when the hydrometer roads 1,200. Let it clurge until its ordinary is always to the control of the purpose of the p

DIRECT CURRENT CHARGERS

Ablough alternating current is the most common type available, all for the benefit common type available, all for the benefit between the control of the con

To determine the polarity of your house lighting current when D.C. is employed, the following method is probably the simplest. Place a very weak salt solution in a cup and dip the bared ends of wires connected to the Kghting circuit in this solution, being sure not to touch the ends together as blown



# Complete Radio Panels in the Most Attractive Designs

DESIGNS and decoration in any art style may be applied to Formica panels by the Veri-Chrome process. This year you will see the introduction of new decoration of remarkable attractiveness.

The Veri-Chrome process, patented and controlled by the Formica Insulation Company is proving so much more adaptable from the production pount of view; it is producing panels of so much finer appearance, that it promises to supercede other methods of panel decoration and marking.

Because of its permanent finish and immunity to atmospheric and other conditions Formica provides the most lasting and desirable front for a radio set. It is evidence of the highest quality.

Completely decorated panels are offered amateur set builders who put together certain well known kits: Bremer Tully, Counterphase, Nameless and No. 1; Best's Superheterodyne in two sizes, 7820 and 7226, Browning Drake kit of the National Co., and the Marco Browning Drake, General Radio Broadcast Receiver Cockaday L. C, 26, and Victorens Nuperheterodyne.

Write for prices and literature.

THE FORMICA INSULATION COMPANY
4618 Springrove Avenue Cincinnati, O.





# EVERYwhere-Winning New Friends

HAT'S exactly what the new Chelsea Super-Five is doing because it offers supreme per rmance at a popular price. Each Super-Five is housed in a beautiful mahogany-finish cabinet with graceful sloping panel and large over-size dials for easy tuning. Dust-proof, the "vitals." Hand soldered con-nections. Rugged bus - wiring throughout. Convenient cord leads for making all connections.

> See these Chelsea features at Your Dealers, Write Us for Folders.

CHELSEA RADIO COMPANY CHELSEA, MASS.

# YAXLEY

Radio Products



AIR-COOLED RHEOSTAT

YAXLEY MANUFACTURING CO.

217 N. Desplaines St. Chicago fuses will result. Holds the ends about one inch apart in the solution and you will notice one of them. certain the direction of flow of the current the latter. It is a good idea to mark the particular pair of wires used for charging

ALTERNATING CURRENT RECTIFIERS to change the current, as mentioned before; be connected, so that when alternating curoutput. This current is then used charging. The second type to be considered the alternating current. The third is the current can only pass through in one direcwhere an electric motor is run on the alternating current and used to drive a gener-Let us now consider these four types of the vibrating type of rectifier or charger. As Fig. 3 shows, the apparatus is very simple in appearance and it is only necessary to insert the plug in a wall socket and connect marked plus and minus, and often the positive or plus (+) pole is painted red. marked, or one of them is painted red, and The other one of course goes to the shows the internal construction of this instrument. long periods of use. A well-made vibrator after the initial ones have been made, the charger itself can practically be forgotten of when it is to be used for reviving a

The second type of charger mentioned The second type of charger mentioned above, that using a bulb for rectification, is shown in Figs. 5 and 6. This particular instrument can be used for charging both "A" and "B" batteries. By referring to Fig. 6, the internal construction of the instrument can be seen. The 100-watt incanthe charge when the instrument is used for "B" batteries. With this, as with other types of manufactured chargers, complete op-

BULB CHARGER

SPACES Arywhere PERFECTLY \$750 in the U.S. Wizard Wire Winder Co.

VOLT unacid everlasting \*\*D\*\* STORAGE BATTERY



# Rubber Covered Insulators

Actual Size



CULVER-STEARNS MFG. CO. Worcester, Mass., U. S. A.

IVORY RADIO PANEL

where prepaid or C.O.D. Also Ivery distant a IVORYLITE RADIO PANEL CO., 3222 Ave Dest. N. - Fort Worth, Texas

erating specifications are available when the charger is purchased and these should be followed implicitly. Failure to do so may re-

The third type of charger, known as the silent in operation as there are no moving parts. On the other hand, however, it is necessary to add water to it just as reguthis should be no detriment to its use, betery and, therefore, can just as readily put a

actual use. By doing this, the battery is just when it is most needed. This type of

MOTOR GENERATORS

Motor generators, the fourth type of battery charger mentioned above, are not in very wide use today but there is at least one pensive in first cost; but will operate over last longer than any other available type of

ment of this type. The particular form of charger that you purchase will rest with your own desires and the initial investment that you wish to make. The choice is en-

of any type whatsoever can be connected to one side or the other, connect your bathouse lighting circuit, or disconnect the charger and connect the battery directly to the radio receiving set. By using this sysmatter what type of battery or charging device you are using, it will repay you in convenience to make an installation such as that shown in Fig. 10.

### COLORED STATIC

Mrs. Johnsing: Ah thought you-all said you was gwine to name your new baby "Victrola," but Ah hears you-all done make

a change.

Mrs. Moses: Yes. Ah expected it would
be a girl, and Ah had decided to name her

"Victrola," but she turned out to be a boy,
so Ah done name him "Radio."

Christian Advocate.



IIS-CO SCIENTIFICALLY- the BEST COIL

for YOUR SET-HERE'S the PROOF











### THE GEN-WIN LEMNIS-COILS LEMNIS - COILS are wound with an elongated

reverse curve, the extraordinary length of which fines the magnetic field, as the unit have opposite polarities.

# CHICAGO MAMERICAN

Bach-Harris Company, 52 South Michigan Avenue, hierarn

Containment I hooked up a fire-table MI set on-position of the containment of the con-stanted with your General Radio Windling. Set Seterating and stores California in the con-sultant of the containment of the con-tainment of the con-tainment

# GET ALL THESE FEATURES.

3. Lemniz-Coils amplify only what is re-

5. Lemnis-Coils are individually tested in the laboratories of the General Winding

Study these essential features. Buy a kit

Study these essential features. Buy a kit of three Lennis-Coils from your dealer. Build a handsome five or six-tube set easily, in a few hours. Or, if you already have a radio receiver, replace its coils with Lennis-Coils and get greatly improved reception.

Kit of Three Lemnis-Coils \$12

Designed for use with .00035 mfd. variable condensers—(Wavelength range 200-600

Street and No...... State...

GENERAL WINDING CO., Inc. 214 FULTON STREET, NEW YORK, N. Y.

# A UNIQUE WESTON radio panel combination





Model 506 Voltmeter and Weston Universal Bi-Polar Switch

FOR UNUSUAL RADIO results, for economy and for positive set control we ananounce this unique Weston combination of Panel Voltmeter and Switch.

Just a twist of the Bi-Polar Switch and you instantly and accurately make a complete electrical check on any type of radio set!

Obvious operation advantages lie in quick and positive knowledge of all voltage conditions as read on this double scale (140/7 volts) Voltmeter.

wolts) Voltmeter.

By placing a Weston Model 506 Voltmeter and a Multi-Point Switch on the
panel of your set you insure the use of
tubes at proper filament voltages, you can
constantly check battery conditions and
get the best results from your set.

get the Best results from your set. Typical of its value is its use on a fivetube neutrodyne—you can regulate the filament voltages of: the Radio Freand Second Audio Frequency Tubes, and check the voltages of the "A" and "C" Batteries, the Detector "B" and Amplifer "B" Batteries.

Amplifier "B" Batteries.

Weston quality Radio Instruments lead in this new field as they do in every other electrical outlet in commerce, industry, research. For further information on this device write for Circular "N".

### WESTON ELECTRICAL INSTRUMENT CORPORATION

173 Weston Ave., Newark, N. J.



# Make Radio Pay You--He Does!



Vito Chico has an interesting, well-paid and pleasant job as a Chief Radio Operator in the U.S. Coast Guard Service. Since graduating from the "Y" institute five years ago, he has made rapid progress. Radio offers these opportunities for

Learn Radio At Home in Spare Time or at our big school in New York City. Courses for Radio Operators, Mechanics, Broadcasting, Dealers. Write NOW for free booklet "Oppertualities is Radio" Y. M. C. A. RADIO INSTITUTE 18E East Seth St. New York City

Insure your copy reaching you each month, Subscribe to RADIO NEWS — \$2.50 a year, Experimenter Publishing Co., 53 Park Pl., N. Y. C.

# WRNY for New York

(Continued from page 1406)

WRNY carries a Church Index. Every Sunday morning the services at churches of all creeds are amounced. Of course, in addition, Dr. Christian F. Reisner preaches. El, and other religious bodies are heart from. There are Protestant, Jewish and Catholic circles, which are of interest te all faiths. We have as well our "Music oil All Religions" period each Sunday afternoon.

Also in addition to the Radio Theatre Index, which tells you which plays to see, there is the Maxical Courier which tells you about the concerts that are going on. There are book reviews by Harper's Magazine, which advise you which books to buy, and many other features of especial interest to visitors to New York.

# NOTABLE RECENT PROGRAMS Now, I should like to tell you some of the

Now, I should like to tell you some of the big things that have happened during the month of January. WRNY, of course, co operated in the International tests and has some very remarkable reports from different points of the globe.

The "Music of All Religions" gathering at The Roosevelt, brought together Arabs, Buddhists, Christians, Hindus, Jees, Clinice and representatives of other laiths. It was seen. These weekly gatherings are bringing together all religions. The Catholic Circle Testing of the Company of the Comp

An interesting night was that when Jesse Straus, of R. H. Macy & Co., and Charles K. Woodbridge, president of the Associated Advertising Clubs of the World, spoke on "Thrift".

"Thrift."

A big night was that when the whole company of "The Taming of the Shrew" appeared in the "Up and Down Broadway Review."

I wonder if out-of-towners were with us at the back-stage broadcasting of "Earl Carroll's Vanities," when all the beautiful girls and comedians spoke into the microphone. Frank Timey was there and told the people he was a lecturer and not a comediar; that he had lectured on the sex of canta-

We have had with us Baron Ireland, Percy Crosby, Arthur Guiterman and Robert Benchley, all of "Life's" editorial staff.

## A VETERAN OF THE BATON

Did you listen in that night when Romualdo Sapio conducted an operatile period with Louise Stallings, the famous American so-prazo? Romualdo Sapio was at one time conductor of the Metropolilan Opera House Calee. While he was at the studio, I showed him an old autograph album of my aunt, that Brand, who was second leading woman in the Parti company. In this is a page Sapio to Kate Brand, written in Boston in 1865, so Sapio added "Still Alive and Kickings at 1926."

The Charles D. Isaacson Sunday night concerts continue to be of extreme interest, and are probably the distinctive musical events of our program. For visitors to New York, the invitation is ever extended.



Now Possible by the Use of Wagner Audio Frequency Transformers

List \$700

These treasferences are tuned and matched by an ENTHIBELY NEW LABOLATORS PROJECTS. They are estpantished by designed. Made of speciality selected materials and are truly a quality product materials and are truly a quality product. Evening the second of t



If Your Dealer Cannot Supply You, We Will

# Three "E" Straight Line Rheostat



of Filament
Temperature
6-15-30 Ohms
Illustration ½ Size
Master Engineering Precision and
Skill now after
you the utmost
in Rhoestate.

General the sed-security variation of filament tenues to the first detector table. For three is only concerning a sure at which efficient reception is obtained and the point is very critical.

The THREE "I" STRAIGHT LINE HILBORY finds that excitate point as no other can. It is straight line variation, runs meeting, if the point is very an other can. If it is realistic line variation, runs meeting, if yell meeting the contraction of the contractio

Dealer or order direct, string us his name.
Price \$2.50—Pestpaid

ELECTRICAL ENGINEERS EQUIPMENT CO
Radio Division
703 W Madison St., Togst. 6,
Change. UII.

Circulars on E

The Aristos of Rheoric



FREE RADIO GUIDE

NEWEST 1956 EDITION

s the latest circuits, the noward developin redio at startlingly law prices. Get
are you want here and save more probast to parts, kits, sets and storcellar.

T silled care dil y resided. Washers

DON'T MISS THIS BOOK.

"RADIO WRINKLES".

JUST OUT!

Ask your Newsdealer.

THE CONSRAD CO., INC., 64 Church St., New York City that you make it your business to be our

We broadcast also a card party which was held in The Roosevelt by the Federated Women's City Clubs. There were 1,900 women present. The feature of the afterdred presidents of city clubs, and each president spoke a few words into the microphone.

I hope I may meet you all, face to face,

### What Is Regeneration?

(Continued from bage 1441)

means that Es may (and in practice, always a regenerative set, the tuned circuit takes no energy from the applied signal, but actually supplies power to the signal!

To the majority of readers the previous

paragraph will seem rather confusing. facts, but in the revolutionary ideas there presented. You may be sure that these statements were proven beyond a shadow of a doubt before being so positively stated.

OSCILLATION IS REGENERATION We are now in a position to define regenage does not supply energy to the regener-ated grid circuit. The applied signal merely tickler supplies all of the energy required to circuit, without a signal input, we would say ferent now. Quoting from a previous paper on this same subject\*: "When a certain voltage E, at a frequency fo is introduced into sufficiently lowered to allow the electron tube to oscillate at a frequency fit. In so oscil tion and oscillation are one and the same thing,"

(To be continued in May RADIO NEWS.) Analysis of Regenerative Amplification Landon & K. W. Jarvis. Proceedings Institute of Radio Engineers. December

# Set Owner's Information

is an object having a positive charge in the The plate of the tube is charged posiune. Ine plate of the tube is charged posi-tively with respect to the filament, anywheres from 16 to 135 volts, depending on the use to which the tube is being put. This volt-age must be supplied by another battery, called the "B" battery. The "A" and "B" batteries are of a dif-

The "A" and "B" batteries are of a dif-ferent construction, due to the fact that the former must be capable of delivering more power than the latter. The average tube in use today draws .25 amperes at 6 volts and

# SAVE TIME AND MONE

We have radio Tools of every description for every conceivable set building purpose You will be astonished at the remarkable tools







NO. 201





### COMBINATION PLIER

Combination Plier, Wire Cutter, Wire Former and Wrench. Drop forged, slender but exceptionally strong. 6 inches long, No. 202—Combination Plier, Wire Cut-ter, Wire Former and Wrench......754

### RADIO TOOL SET

This is the handlest set of tools ever made for Radio Work by the makers of the famous "YANKEE" Tools. It contains the following: I Ratchet Seren-driver, 6½ in, long 3-16; I Blaid, 3½ % ½; I Blaid 2½ % ½; I Countersink; 2 Socket Wrenches for all small utts; I Reamer to enlarge holes in panel from ½ to ½; I Wrench, one end 5-16° square or hex, for jack, other 5°

PRICE per set-No. 701..... ..\$3.00

### SIDE CUTTING NIPPER, LAP JOINT

For cutting all kinds of wire. Jaws hardened and oil tempered. Natural steel finish with polished jaws. Length 6 inches. PRICE—No. 201 ......75e

### CIRCLE CUTTER

PRICE—No. 402 \$3.00 401. Same tool but smaller and not fitted with bead or scroll in one operation.

PRICE-No. 401 .....\$2.00 SCREW STARTER and DRIVER

PRICE-No. 304 .....\$1.00

# ELECTRIC SOLDERING IRON

A perfect tool for Radio Work. Operates either on 110-volt A.C. or D.C. The heat element is of Nichrome, which presents overheating and assures the desired even temperature. Size of Iron, 1035 in. long. A 44t. cord and plug is furnished. PRICE No. 800 .....\$2.00

### HAND DRILL

Especially designed for Radio Work by the makers of the famous "Yankee" Tools. A beautiful balanced, small, powerful drill with 4 to 1 ratio of gears for speed. Special chuck 9-32" capacity, to take largest drill, mostly furnished with drill or tool sets. Length over all, 9½ in. Weight 1½ lbs. PRICE-No. 302 .....

Order all tools by order number. All goods are shipped free of transportation charges to all parts of the United States and possessions the same day as the order is received.

MONEY REFUND GUARANTEE

If you are not satisfied money will be refunded on return of goods.

THE

# RADIOGEM CORPORATION

66-R West Broadway

New York, N. Y.

# Radion

# serves

# manufacturers

The great desirability of Radion insulation - and the great factory facilities of the organization that produces it-are widely appreciated by manufacturers of sets and parts.

That is why Radion is so extensively used as insulation for

Coils Jacks Batteries Head Phones Sockets Tubes

> Base Panels Binding Post Strips

Easy to machine, accurate when moulded, Radion simplifies the problems of production and assembly. From the tiniest bushing to the largest panel, Radion serves the radio industry efficiently and econo-

Manufacturers are invited to con-sult us freely and to ask for ex-perimental and test samples of Ra-dion-"The Supreme Insulation."

AMERICAN HARD RUBBER COMPANY

Dept. A16, 11 Mercer St., New York City



GUARANTEED OR

FREE RADIO BOOK

Write for new book just rabilished showing many Alpo 8 new chroid circuits. Address Electrical Laboratories, Dept. 17-D, 2309 Cettags Grave 609, III.

ity, but it is sufficient for the needs of the plate circuit of the tubes

# ADVANTAGES OF STRANDED

WIRE 10. Henry Clements of New York City,

Ques,-Why is stranded wire better to use Ans.-The electrical currents that flow in the antenna are of high frequency; and is just the opposite of the current from a direct current source, as that type of cur-



These cross-sections of wires illustrate how dif-ferent currents behave in different wires.

In order to have as free a patn as pos sible, therefore, the antenna wire should have stranded wire is used. If a solid wire which of metal in the wire is kept at a reasonable

# Radio Wrinkles

inch narrower than the length of the rod.



The above illustration shows a simple me of constructing a fixed condenser by wrap the foil and mica about a rod.

# NEW

# Universal Vernier Dial

Price ..... \$2,50



SM 210 and 211 Transformers



SEE SM PRODUCTS AT YOUR DEALERS OR SEND FOR CIRCULARS SILVER-MARSHALL, Inc.

### IMPROVE YOUR RADIO SET WITH A Ray "Low-Loss" Ground

Reduces Power Hum and Static Greatly Improves Tuning Clarity, Distance and Volume

Not a trick device, but Designed and Con-structed by an Electrical Engineer.

Price \$6.00 At Your Dealer's, or by Mail or Express RAY MANUFACTURING CO.

### VEST POCKET RADIO \$1.50 SELLER

30 miles tuning. No batteries. No tubes. Biggest radio sensation of the year. Sample \$1.00. One Dozen \$8.50. It astounds radio fans with its remarkable clearness. TRIANGLE MANUFACTURERS, 506 W. 45th St. . . . . Chicago

# Sylfan "RADIOMATES"

Receivers - Reproducers - Tubes BAKER-SMITH CO., INC., San Francisco Branches in Principal Cities





atalog 466 S is free to Dealer

nest obtainable. Otherwise it will be apt to creak. A condenser made of one complete turn of all three elements on a ½-inch rod 3 inches long will be suitable for the grid condenser in the average set. A half-dozen turns should be used for a by-pass. This, again, depends upon the thickness of mica

Contributed by Will Griffin.

# How to Construct the DX4

(Continued from page 1433)

It is important in this set that low-ratio audio frequency transformers be used. 3:1 was the ratio selected for the set shown in the accompanying illustrations.

The grid condenser and leak, and the two by-pass condensers, are mounted below the sub-nanel

### WIRING

An inspection of the illustrations will show he in the procession of the illustration will show space below the sub-panel. This is a good procedent for the builder to follow. It makes all parts of the assembly completely accescited to the procession of the procession of the circuits. It is best to wire the grid circuits of the rails frequency amplifier and detector first; then the plate circuits of the same server the most direct wiring. When they are completed the rest of the wiring may be done, lading carried viring. When they are completed the rest of the wiring may be done, lading carried to keep all wires carrypossible. A few minutes spent studying the wiring diagram should serve to slow the best method of arranging the various leads, at least in the filament and plate circuits.

### NEUTRALIZING

The set is neutralized in the automay manner. After all connections have been manner. After all connections have been in some strong local station. The set will probably oscillate strongly, making it insects the regeneration control at zero coupling and the variable symmacy of the interinge table and place a bit of paper over one of the finament prosup. Then re-insect it in the length of the probably of the properties of the probably of the properties of the probably and the probably after the probably and the probably after the properties of the

### OPERATION

The operation of the set is identical with and of an ordinary phree-circuit regenerative that of an ordinary phree-circuit regenerative tuning control in the radio frequency stage. This dial follows approximately in its set-circuit. The coupling control in the interest of the control of the circuit. The coupling control in the interest of the inter

# It's Easy to Build A Powerful Set /

Using the New and Improved FRESHMAN "TRF" Low Loss Kit



These are the identical units which have made the FRESH-SMAN MASTERPIECE factory built Receivers the World's Greatest Radio Sets.

# Straight Line Wave Length Condensers With Low Loss Self Balanced Coils

Complete instructions for building this powerful five tube receiver, written in plain everyday English, together with actual size schematic wiring diagram, are furnished with every FRESHMAN "TRF" KIT.

Sold by Authorized Freshman Dealers Only!

CHAS. FRESHMAN COMPANY, Inc.

Freshman Building 2626 W. Washington New York Blyd., Chicago



BUILD IT WITH KELBRAKETS!

Make a sturri, efficient
good fabeling set. Key
bow, giving actual site
bow, giving actual site
Free:
KELLERADIO. Inc.
San Francisc, Calif.

EVERYTHING IN RADIO
AT ATTRACTIVE PRICES
SETS OR PARTS
Mail order only
ALL RADIO COMPANY, 47 North Clark St., Chicago

Wade Square Law Condenser and Dial
All tires, complete with 4-inch vernied dist, for concept, olders and condenses and condenses

BADIO AMATEURS—Transce your set with a Parado Mica Condenser, Monde UC 1015, made expressly for Radi Corperation, Only \$1.25. Orientally listed \$5.55. Copact rume, 0402 to .001 mid. All brand new and packed it original containeers. Instruction sheet eached. Send you order in new: Postspan Persaid Anywhere in the U. S. UTILITY RADIO CO., 58 North 6th Street, Newark, Nr. 1

# INTRODUCING



**EVERYWHERE** 

100

PAGES ILLUSTRATED

Stories by H. G. WELLS JULES VERNE EDGAR ALLEN POE and other great writers

# Big, Smashing Stories of the Future, Educational, Absorbing

### GREAT NEWS

# READ AMAZING STORIES

SOLD EVERYWHERE, OR IF YOUR DEALER CANNOT SUPPLY YOU WRITE DIRECT TO

Experimenter Publishing Co., Inc., 53 Park Pl., New York

## The Radio Watchman at the Gate

(Continued from bage 1408)

the detector being defeated by the presence

It the detector shows the presence of an undue amount of metal on a person passing through the gate, he may be then searched with more care. A small "searching coil" is provided for this purpose, which acts on a similar principle to the larger circuit. By moving this coil over the body of the person searched, the location of any piece of metal is determined accurately in an instant. This ings in the teeth; and that without actually coming in contact with the person thus

## **Rook Reviews**

TUNING. By W. James, Assistant Editor of Wireless World and Radio Re-

reiner. Still paper over, sie 5½ x 8½ inches. 75 pictures and explanatory fine the 75 pictures and explanation of the 75 pictures and 75 pictur

the three of wining one priced and de-terment of wining one priced in the con-location of the train all mining the con-location of the con-traction of the con-traction of the con-traction of the con-traction of the con-cernation of the con-traction of the con-traction

THE HOME CONSTRUCTOR'S WIRE-Review magazine. Counting postage, the

Review magazine. Counting postage, the price is about 50c.

The contents page lists complete constructional details for a Simple Crystal Set, Single Vaive Set, as Note Magnifeer (Audio, Prequency American Set, as Note Magnifeer (Audio, Prequency American), Set and a Power Amphifeer. This seems to cover the range of essential units in more general use. British Post Office regulations prohibiting the

# The Mystery Receiver







# THE UNIVERSAL SUPER-8

# Tunes all Wavelengths from 35 Meters to 3600 Meters

The Universal Super 8, "The Mystery Receiver," is an improved design of the Universal Pilo 6, but does not by any means supersofte the Universal Pilo 6, which is still continued and without the still receive the property of the property o

(1) Meters are provided to read the battery voltage

the Universal Super 8. Either the old or the new type tubes are used in the Universal Super 8, and special provision is made for bias batteries, specified by some tube manufacturers.

Obviously his receiver will not be made on a large production scale, due to the custom-made basis as each set is laboratory tested in Long Island by an expert radio enginer to insure its perfection.

WRITE OR WIRE

### GOLDEN-LEUTZ INC. VAMOS BUILDING

6th & Washington Aves., Long Island City, N. Y. Cables "Experinfo"

BLUEBIRD RADIO TUBES GUARANTEED\*

work in Badlo Prequency, outrodyne, Super Heterodyne id Reflex. WITH BAKELITE BASE Type 401A Type 403 Type 403 Type 493 Type 412 Alse 499A with Standard Types DD2-5 Watt Transmitter \$3.00

BLUERIRD TURE CO.

# The Saw for Every Use

Cuts wood, iron and bakelite. Especially designed for radio set builders. Highly tempered steel blades. Sold by radio dealers and hardware stores or sent by mail, postpaid, with six blades. \$1.00



Insure your copy reaching you each month. Subscribe to Radio News-\$2.50 a year Experimenter Publishing Co., 53 Park Place, N. Y. C.



It Says "STOP" and Lightning Won't Harm Your Set

The National Board of Fire Under writers specify that an approved Radio Lightning Arrester must be used Protection is easy. Insure your insur-ance and save your set with a WIRT LIGHTNING ARRESTER (listed as standard by the Underwriters Labora-tories). The cost is a trifle.

The WIRT LIGHTNING ARRES-TER is an approved air gap type, made of bakelite giving ample insula-tion, with brass terminals moulded in tion, were brass terminate moulded in bakelite, far enough apart so that there is no leakage. A "petticoat" of bakelite shields the arrester from water and dust. Handsome and rigid. Lasts a lifetime. Easy to install. Full direc-

THE WIRT LIGHTNING ARRESTER IS LISTED AS STANDARD BY THE UNDERWRITERS LABORATORIES



Sold by Leading Radio Dealers

WIRT OMPANY PHILADELPHIA PENNSYLVANIA

# \$138 U. S. ARMY \$20.65 Aeroplane Radio

RECEIVES AND BROADCASTS

WRITE QUICK! Den't Wait. Get com-teday. Only 100 Sets at this lew price-532,65. WARSHAWSKY & COMPANY Chicago 1915 So. State Street, Div. RN-4

Learn Watchwork, Jewelrywork and Engraving A fine trade commanding a good sal-ary, and your services always in de-mand. Address Horological, Dept. 5, Bradley Insti-tute, PEORIA, ILLINOIS, for our latest catalog. use of regenerative receivers, because of their in-clination to secilate and thus relate as inter-cellation to secilate and thus relate as inter-tor of the control of the full stretch, because of the control of the control of the control of the third of the control of the control of the third of the control of the control of the third of the control of the control of the third of the control of the control of the third of the control of the control of the tenth of the control of the control of the control of the tenth of the control of the control of the control of the tenth of the control of the control of the control of the tenth of the control of the control of the control of the tenth of the control of the control of the control of the tenth of the control of the control of the control of the tenth of the control of the control of the control of the tenth of the control of the control of the control of the tenth of the control of the control of the control of the tenth of the control of the c

WIRELESS VALVE RECEIVERS IN PRINCIPLE AND PRACTICE. By R. D. Bangay and N. Ashbridge. Stiff R. D. Dangay and N. Asnoridge. Stiff paper cover. 116 pages. Size 5½ x 8½ inches. Published by Iliffe & Sons, Ltd. 75 diagrams, sketches and curves. Price 2/6 (about 70c).

of Receives."

"Characteristic curves" are so well described and explained that no one, after studying the text and sketchen, need say they cannot compressive the studying th

SIMPLICITY OF RADIO is the same of ma Shapage bookle written by Powel Crookey, Ir., and published by The Cross of the Cros SIMPLICITY OF RADIO is the name of

RADIODYNAMICS. The Wireless Con-ADJUDYNAMICS, The Wireless Control of Torpedoes and Other Mechanism.

By B. F. Miessner. Hard covers. 5½"
x 8¼". 211 pages. Published by D. Van
Nostrand Co., New York. \$2.00.

Noterand Co., New York, \$2,00. This look is a secoline, precised and compre-table look is an excellent, precised and compre-table to the compression of the compression of the this transit of the science of telescechanics, or the transit of the compression of the compression of the systems and mechanism und a segmental com-traction of the compression of the compression of the systems and mechanism und a segmental com-traction of the compression of the compression of the systems of the compression of the compression of the Renders who have found interest in the article, and the compression of Relatio News, will be able to the compression of the compression of the com-traction of the compression of the compression of the Messages's looks, its which the author of that articles to include the compression of the compression of the traction of the compression of the compression of the state of the compression of the state of the compression of the compression of the compression of the state of the compression of the compression of the compression of the state of the compression of the compression of the compression of the state of the compression of the compression of the compression of the state of the compression of the compression of the compression of the state of the compression of the compression of the compression of the state of the compression of the compression of the compression of the state of the compression of the compression of the compression of the state of the compression of the compression of the compression of the state of the compression of the state of the compression of the compression of the compression of the state of the compression of the compression of the compression of the state of the compression of the

# Dealers! REAL PRICES

We carry in stock at all times the following merchandise-

Electrical Supplies

Hardware Musical Instruments Leather Goods

FREE! 1926 complete illustrated catalog just off press. Write for a copy at once. Supply limited.

General Merchandising Co. Incorporated

818 Walnut St., Philadelphia, Pa.



X.L PUSH POST-X-L RADIO LABORATORIES 2426 Lincoln Avenue, Chicago, III.



STANDARD RADIO MER-CHANDISE and up to date Log Book It will say you to buy from us. We corry one of the largest lines of Radio in the Least. Dea't neist the wanderful copertunity to participate in this Great Sale, Rush your regrout at once, To cover the cest of mailing encises 10. ECONOMY RADIO SALES COMPANY 288 6th Ave. Dept. F. New You DEAL DIRECT AND SAVE REAL MONEY

# 5-TURE SET = \$28 = LATEST DESIGN

Insure your copy reaching you each month Subscribe to RADIO NEWS-\$2.50 a year Experimenter Publishing Co., 53 Park Pl., N.Y.C



"Variable Capacity"

### International Radio (Continued from page 1409)

with distort onless transformers for single

Though "hard ruther" may prove tory to notice from a recent foreign advertisement that this material (insulation) is

All insulating parts for the weak current and radio industry made of the easily worked up and highly superior artificial material "TROLIT" in all colors. "Heares, handles, scale discs for conden-

not for his pants but for his receiver's panel.

A. J. Smith.

NOW ACCORDING TO THE BOOK ALL I NEED TO COMPLETE THIS SET IS A CATWHISKER

# The

# UNIVERSAL Standards of Quality



In building a radio receiver remember that its performance depends primarily upon two things; an efficient circuit, and the use of good parts.

Wherever you find a popular circuit The General Radio Company has

tus for laboratory use than any other

one Company in the history of radio, The same outstanding craftsmanship and materials are embodied in General Radio parts for use in the

Through the merits of design, performance, and price, General Radio instruments for the scientist or set-

Every instrument made by the General Radio Company is thoroughly guaranteed.

Write for our latest parts



GENERAL RADIO CO Cambridge 39, Mass.







STUDY AT HOME

INSTRUMENTS

"Behind the Panels of Better Built Sets"







Insure your copy reaching you each month. Subscribe to Radio News-\$2.50 a year Experimenter Publishing Co., 53 Park Place, N. Y. C.





EXPERIMENTER PUBLISHING COMPANY, INC New, Enlarged 2nd Edition Size 9 by 12 inches 50c the Copy

# Sold on All Newsstands

# AMATEURS' HANDIBOOK 118 Hookups: Over 300 Illustrations

Any electrician will tell you that his Electrical Handbook is his most valuable reference—so also, the builder, the mason, the carpenter, all use a handy reference book no matter what the job may be. It is as important as the tools they use to work with. EVERY MAN SHOULD HAVE A RADIO HANDBOOK, the real, concise, vet comprehensive book on everything of reference value to anyone interested in radio whether he builds his own set or is engaged in professional radio activity.

All information for this book has been carefully culled from the pages of no less authority than Radio's Greatest Magazine, Radio News. Radio men in constant touch with all radio material have selected the most valuable articles.


The RADIO NEWS AMATEURS' HANDIBOOK contains a complete resume of every phase of radio. It is the first book of its kind, a veritable gold mine of radio information.

Published in the large size 9 x 12 inches, contains 128 pages, il-Instrated

Published and Distributed by

The Experimenter Pub. Co., Inc. 53 Park Place, New York, N. Y.

# Romance, Mystery, Intrigue-700 Years Hence



# Hugo Gernsback

Editor of SCIENCE & INVENTION. AMAZING STORIES, RADIO NEWS, AND RADIO INTERNACIONAL

I N 1908, Mr. Hugo Gerasback, Editor of RADIO NEWS and other publications, published the first radio magazine the world had ever seen—
"Rajh 124 C 41+ A Romance of the Year 2660." This atory, although
written many years ago, proved more valuable as the years went by, because
many of the prophecies made in this book gradually came true. This was in the days before broadcasting had even been thought of before we had the radio telephone, yet all of this is faithfully chronicle this story.

Old-time readers of "Modern Electrics" probably remember the stor and now have a chance to get the complete book. A pioneer in the electrical and radio field, Mr. Gernsback has a profound knowledge of the subjects, coupled with a finely trained and highly imagina-tive mind.

# THE STRATFORD CO., Publishers

For Sale by The Experimenter Pub. Co., 53 Park Pl., N.Y.

Just fill out this coupon, enclose \$2.15 and we will send you a copy at once Post-Paid.

EXPERIMENTER PUBLISHING CO., 53 Park Place, New York City. Enclosed find 8, ...... for which please send me copies of "RALPH 120C 41+," Name ....

PRICE \$2.15 POSTPAID

### New Developments in Radio Apparatus

is still measured across the terminals of the detector and audio frequency tubes, but read across both the R.F. filaments and the re-sistor in series. Thus the voltage on the R.F. filaments is always known to be the same as or less than the meter reading, pictured in the top view of the interior.

The tubes, it will be noticed, are mounted usual practice. The sockets are supported by springs, and the whole assembly is prac-

The appearance of the entire exterior is





This illustration gives data on the construction of the "canned coils" of the receiver illustrated on page 1414.

A TESTER WHICH CHECKS ALL TUBE

Tube testers which employ meters in the various circuits, if a complete test of all functions is desired, are prohibitively recognitively and the control of the control of



This compact instrument gives a quick, quali-tative test of tube functions which would re-quire half a dozen accurate meters to duplicate quantitatively. Photo by context of Morrison Radio Co.



# This new kind of "A" POWER pays for itself over and over again

THE first cost of Unipower cost is the last.

When you also consider that Unipower banishes the cost and inconvenience of dry "A" battery renewals, or the bother of charging a storage battery, increases the life of your tubes and in addition, gives you the finest kind of continuous, unfailing "A" power, you see how economical Unipower really is. pays for itself over and over again. It costs but a few cents a month to operate. Write for booklet,"Unipower-a triumph in radio power".

THE GOULD STORAGE BATTERY CO. Inc.

Unipower contains a Balkite charge 4 volt model, \$35 - 60 cycles, 110-125 volt A. C. Designed for radio sets using 199 tubes or equivalent. 6 volt model, \$40-60 cycles, 110-125 volt A. C. Designed for radio sets using 201-A tubes or equivalent. Prices west of the Rockies slightly higher. Special models, 25-50 cycles are

# You'll find that Unipower

# nipower

Off when it's on - On when it's off

CARTER "DIALITE"



In Canada: Carter Radio Co., Limited, Tere Carter Radio Co.

"IMP" Pilot Switch \$1.50



Insure your copy reaching you each month. Subscribe to Radio News-

red light when

\$2.50 a year. Experimenter Publishing Co., 53 Park Place, N. Y. C.

# Special Horns

# to fit Special Cabinets

Although we make 45 different amplifying horns for use inside and outside the cabinet, it is

possible, Mr. Manufacturer, that Horn of Special

Size to Fit Your New Model

Radio horns are installed in many of the highest class radio sets manufactured. If we may have your cabinet specifications. we will gladly design and quote best scientific principles, which will fit your set.

Miller horns, through experience and knowledge, are designed on the soundest acoustic principles. They are inert, and will not split, erack, dry up,

Let us figure with you on a more satisfactory horn

for your models, old or new. The Miller Rubber Co. of N. Y.

AKRON

OHIO

# DATENTS

No Charge for the Above Information

RANDOLPH & CO., Dept. 459 Washington, D. C.

ATWATER KENT

the tester is put in the socket in the set

Thus, by one simple operation, this tester of a tube, and supplants apparatus of many times its cost. The older style of meters course, and remain the laboratory standard, ing tubes within the abilities and funds of

A TABLE WHICH CONVERTS THE SMALL

The average small set which has no interwrath of the housewife because of the bat-



tery leads and the antiquated phonograph ap-pearance of the horn. For this reason the table console illustrated in the two accom-

and left, compartments are provided for "B" batteries, "A" batteries, and charger, or for eliminators, and passages for the battery







costing two and three times as much. Test them in your set and be convinced of the TRUTH.

FREE Four page booklet in colors, formers" and hook-ups.

AMBASSADOR SALES CO. 110 Greenwich St., Dept. 450 New York



The Daven Super-Amplifier for volume and tone quality 3 STAGES RESISTANCE COUPLED ECONOMICAL DISTORTIONI.

Easily added to any set Saves Several Hours' Assembly For Sale by All Good Dealers

or the center of the cone in the best position behind the grilled opening.

A drawer is provided in front for the call



## A New Radio Frequency Receiver

One single .00035-µf. S.L.F. condenser.

One 10-ohm rheostat,

One single closed- and one single open-circuit telephone jacks, Six UX-type tube sockets,

the double condenser, in the corresponding right-hand center section; the open circuit left-hand corner: the closed-circuit jack and

### POSITION OF THE PARTS

The sub-panel is supported in the rear of the front panel by the heavy frames of the phone jacks and a small "L" shaped brass

apparatus,

One coil is mounted on the left side of
the single condenser, the two being constage R.P., components. Another goes on
the left side of the double condenser, and
couples the first tube to the second. The
third fits on the right side of the double
condenser, which tunes together the second
condenser, which tunes together the second and third coils, representing the second R.F.

and thrif coils, representing the second R.P. and detector stages.

The placement of the various sockets and the audio amplifier components is quite simple, and will present no difficulties to the average constructor. The socket behind the single condenser is for the first R.F. tube; the one behind the double condenser for the second R.F. tube; and the one in the right-hand corner for the detector. The grid-condenser-and-leak unit is screwed down conveniently in the place between the



the easy-to-use charger



East of Rockies Two ampere size \$18.00 Five ampere size \$23.00 60 cycles . . 110 volts Merchandise Department General Electric Company Bridgeport, Connecticut Anyone can clip a Tungar to a battery and plug it in on the house current. That's all there is to it.

Attach a Tungar at night-and have snappy batteries in the morning. It will not blow out Radiotrons.

It needs little attention. Only a dime's worth of current consumed for a charge. No wonder "Tungar" is fast becoming the word for battery charger.



# GENERAL ELECTRIC

# Save Money on Your Raytheon-B-Eliminator NOW \$28.95

FREE Send instructions and Particulars
MACK LABORATORIES
725 Cass Street Chicago, Ill.

# Build the Radio Broadcast UNIVERSAL.

Four Tube Receiver ENDORSED by Radio Engineers as the best of over

COMPLETE KIT of approved parts include WRITE for free backlet centaining complete instruc-

RADIO PARTS CO., LABS. 8 South Austin Boulevard

Insure your copy reaching you each month. Subscribe to Radio News-\$2.50 a year. Experimenter Publishing Co., 53 Park Place, N. Y. C.

PORTUGAL

PARAGUAY

PANAMA









require only two very short connecting ?

coupling units then follow in natural order around the back edge of the sub-panel. last A.F. tube is in the left-hand corner

### distributed along the extreme back edge. WIRING DIRECTIONS

It is a good idea to drill and assemble units, and to put them together after as much work as possible has been done on each. Much of the wiring on the sub-



Panel view of this radio frequency receiver Note the simplicity of controls.

The wiring diagram will be recognized by many as a more or less orthodox circuit without fancy frills or unnecessary em-bellishments. It is highly stable and dependable, as the results obtained from it will conclusively demonstrate.

The filament wiring should be treated

The filament wiring should be treated first. The Il-ohum rheostat, RI, controls the first two R.F. tubes; the 30-ohum one, R2, the detector Johne, One / 2-ampere ballast resistance R3 maintains the filament of the first audio bulb; a second (R4), that of the second audio bulb; while R5, which regulates the last the alone, as /2-ampere size, because it is connected to a UX-112 tube, which drows that much current.

because it is connected to a UX-112 tube, which draws that much current.

The primary of the first lemnis coil, L1, goes straight to the aerial and ground posts; while its secondary is bridged by the single .00035-µf condenser. The primaries of the other two coils, L2 and L3, are wired to

The connections of the double condenser plates, S1, is then connected to the G post

the third receptacle.

The audio amplifier embodies the best The audio ampliher emboties the best features of two systems by employing a transformer for the first stage and resistance for the last two. The arrangement furnishes signals of great volume and impeccable clarity. Condensers Cl and C2 are the usual blocking capacities, while resistances R5, R6, and R7 are all 100,000 ohms, and L 500,000 ohms


and L 500,000 ohms.

The first five tubes are standard UX-201-As, the last one a UX-112 power bulb.

The latter is quite essential, as a regular 201A in this position is capable neither of remaining under-saturated nor of providing the proper plate circuit impedance char-acteristics to match a cone loud speaker. The battery requirements are the usual ones; 6-volt storage "A", and 135-volt "B."

### OH, LADY, LADY!

Watts: "Why does he always speak of his wife as Old High Tension?" Mike O. Henry: "Because she has a high frequency for charging everything."



FOR a long time to come, there will not be evolved a more efficient circuit than that in the new Hammar-

Ten leading radio engineers de-vised it as their composite ideal. The five tubes, which possesses the sen-sitivity of a standard eight-tube receiver, plus a high degree of selec-tivity which minimizes interference. Tuning is simplicity itself. The

ing designed to operate on the cone type of speaker.

### HAMMARLUND MFG, CO.

UNIT 2 - "Hammarlund, Jr." The Precision Midget Jr." The Precision Midget Condenser. UNIT 3 — The New Ham-marlund Straight-Line Fre-quency Condenser. UNIT 4—The New Ham-marlund Low-Loss, Space-Wound Coils.





And best of all, you can construct it yourself, from the finest parts of any professional builder. The cost, \$60.80 (cabinet extra), is

Your dealer sells the famous Ham-

can supply you with all the other parts specified in the "How to Build" book, which will be mailed on

ammarlund PRODUCTS

## 424-438 W. 33 St., New York

The Foundation Unit con-tains all special parts needed to build the Hammarland-Roberts Receiver, including drilled and engraved panels, brackets, wire, screws, etc. \$7.50, at your dealers.









# BUILD STYLE INTO YOUR RADIO!

BOICE-CRANE JUNIOR BENCH SAW TOLEDO, OHIO

W. B. & J. E. BOICE Dent. 804-B 9 Circuits-1 Tuning Dial!

# KELLOGG WAVE MASTER

KELLOGG SWITCHBOARD & SUPPLY COMPANY



radio fans. BARAWIK CO., 162-145 So Canal St., Chicago, U. S. A

Insure your copy reaching you each month. Subscribe to Radio News-\$2.50 a year. Experimenter Publishing Co., 53 Park Place, N. Y. C.

# Seven Years of Superiority KNOWN as the original HI-MU tubes before the days of BCL;

Preferred by amateurs and experts before the first popular receiving setwas sold;

Progressively improved in construction Made in the newest and best equipped

plant in America. Get the World on Your Dial With Myers Tubes

Low impedance, high amplification constant, high mutual conductance. Best results in any circuit

At Your Desler's Myers Radio Tube Corporation Cleveland, Ohio



Clarity and Use Myers Tubes

Tiet Price All Types

2.5 At Your Dealer's

# RADIO INVENTIONS

Protected by U. S. and Foreign Patents, Patent and Trade Mark Lawyers, Washington, D. C., New York.

Established Over Sixty Years Send Description and Skotch

Insure your copy reaching you each month. Subscribe to RADIO NEWS-\$3.50 a year. Experimenter Publishing Co., 53 Park Pl., N.Y.C.

# The Doughnut Five

Vernier dials

Potentiometer 300- or 400-ohm

By-pass condensers, .0005-#f ...

tions are used, the holes in the 2-inch sides

The audio frequency transformers are depending upon the size and method of mounting provided by the make selected. Those used in the set illustrated are fas-tened to the sub-panel by the bolts and

The tube sockets are next mounted, spaced at equal distances from one another.



A view of the front of the Doughnut Five re-ceiver. Notice there are three condenser dials to adjust, making the tuning of the set rela-tively simple.

grid and plate terminals should be at the rectly in front of the sockets. The main For the sake of neatness, and to minimize

ment of the wiring diagram, the wiring

It is best to start by wiring the coils to the condensers, and then to the grid cir-cuits of the radio frequency tubes, as the rated. A careful inspection of the wiring diagram should be sufficient guide in arrang-

OPERATION OF THE DOUGHNUT FIVE This set is tuned in the same manner as any standard neutrodyne or tuned radio frequency set. If the first dial does not read





# SEVENTY WHISKERS

Savanty "Whishare"-sill

Nothing like it. Won't burn out. Will last for years. Buy today from your dealer, or write us. (Price \$2.00)

SCOTT SALES CO.. 439 S. San Pedro St. G-S RADIO RESEARCH LAB.





# The Traffic Cop

Add a Ferbend Wave Trap to your Radio Set and "Po-lice" your reception. Regu-late traffic! Guaranteed to

Ferbend Electric Co.



# DON'T MISS THIS BOOK RADIO WRINKLES

ON SALE MARCH 1st

A complete book full of helps, wrinkles, shortcuts to better recep tion. Hints on how to build good sets, how to get the most from them. 96 pages, 500 illustrations, large size 9 x 12 inches.

PRICE 50 CENTS Sold Everywhere

If Your Dealer Cannot Supply You Write Direct to

THE CONSRAD CO., Inc. 64 Church St. New York, N.Y. at approximately the same figure as the others, try a different antenna tap. Leave the set on the tap which brings the dials

The set may be found to oscillate at certain portions of the wave-length range. In this case the potentiometer should be varied will be found to serve as a volume control

as well. If the set does not give satisfactory am-

## The Ghirard UIII Super-Heterodyne

probably be helpful here. The top lug near-est the front panel is connected to the stator terminal of the oscillator condenser. The tube panel to the plate terminal of the os-cillator tube. The rear lug goes to the rotor of the condenser. The front lug, at the lower end of the coupler, goes to the A-bus wire; the rear lower lug to the 0.005-41.

wire; the rear lower ing to the www.pr.;
oscillator grid condenser.
After the parts have been assembled on the tube and front panels, do as much of the wiring on these panels as possible before finally fastening them together. Have the soldering iron hot enough to make the solder nections are not properly made. Shape the

The wiring diagram (page 1431) represents the connections of the set in the final form adopted. When the wiring is completed, check it over carefully at least twice forget one or two connections.

TESTING AND OPERATING

When the set is ready for testing, set the out. (The phone plug must be inserted to light the last tube). Now connect the "C" battery (4½ volts). If everything seems all right, connect the "B" batteries to the set. Start with 90 volts on the A.F. ampli-fier; about 67½ volts on the intermediate frequency stages; and around 45 volts on the detectors. Connect the speaker or phones, being sure that a loud click is heard.

You are now ready to connect the loop. It must have a center tap, and should cover the broadcast range of wave-lengths when used with the 0.0005-#i. condenser. The loop used by the author for testing consists of 13 turns of wire, spaced 14 inch apart, of 13 turns of wire, spaced ½ inch apart, and wound in a square pancake form with a mean side length of 15 inches. A center tap is provided, Connect the loop to the set. Reception for any station will be found at a maximum when the plane of the loop points in the direction of the station received. Now turn the two detector tubes up about three-fourths of the way. Turn the oscil-lator and LF, amplifier tubes up to about half of full brilliancy. The last A.F. tube

may also be turned up about 75 per cent.

# Amazing amfield Success OLODYNE Built with

Never before has such widespread endorsement been given any new radio circuit in so short a time! From all parts of the country letters are pouring in telling of the wonderful results obtained with the new Camfield DUODYNE CIR-CUIT,-a circuit which prevents oscillation.

Camfield Parts!

### Build It Yourself with Camfield Parts-Save

The following Camfield Parts are essential for use in building the Famous DUODYNE CIR-

densers, each
5 Type 11 Camfield Bull Dog Grip Sockets, each

Write Today for Your Copy of Complete

FREE Descriptive Story telling about the DUODYNE CIRCUIT and

Dealers!

Camfield Parts-and how simply and easily you can build this set which is bringing such re-

Write today for com-plete information about the DUODYNE CIRCUIT and Camfield Parts. Give us the name of your jobber. markable results everywhere! Send us the name of your radio dealer.

CAMFIELD RADIO MANUFACTURING CO. 829 HARRISON ST. OAKLAND, CALIFORNIA

# LEARN THE CODE



THE OMNIGRAPH MFG. CO., 15 HUDSON STREET, NEW YORK CITY one zet and don't know the code-you are missing most of the fun

Insure your copy reaching you each month. Subscribe to Radio News-\$2.50 a year.

Experimenter Publishing Co., 53 Park Place, N. Y. C.



# \$2.75 World Storage "B" Battery

12 Cells, 24 Volt units, Equipped with Solid Rubbes Case, an insurance against acid and leakage, Extra beavy glass jars. Heavy rugged plates. Bullt with the same care and precision as the famous World Radio "A" Batteries.

Lasts Indefinitely-Pays for Itself Economy and performance unheard of before! Re-charged at a negligible cost. Delivers unfailing power that is clear, pure and quiet. Tube pist of B) voltage all, constant, unverying, dependable and efficient Radio tubes are far too critical to subject them to power less efficient than that coming from a good storage 'B' battery. Your set demands the best!

Tested and Approved by Leading Authorities The following qualified institutions of merit have tested and approved World Storage 'IF Batteries of Standards, Popular Radio Laboratories, Radio Roudent Laboratories, Radio Age Laboratories, and Standards and Standards of the Standards of the

SEND NO MONEY Just state number of batteries wanted and we will ship day order is received. Extra Offer: 4 batteries in series (58 volts), \$10,50. Pay expressman after examining batteries, 5 persent discount for eash with order. Save 50 percent—get a tried and proven battery of merit, by mailing your order in NOW!

WORLD BATTERY COMPANY
1219 So. Wabash Ave. Dept, 75 Chicago, Ill.
Maters of the Stammer News Feet at "Street Rathery
Prices: 6-806, 306 Aug., 81, 65; 100 Aug., 81, 61, 64 Aug., 814,00.

World

# Are Your Variable Condensers Dusty?

You will not get satisfactory results if you allow dust to collect between the plates of your variable condensers. You can thoroughly, quickly, safely and easily remove the LITTLE MARVEL RADIO BELLOWS

Special rubber tip prevents damage from contact. Fre-quent use of the LITTLE MARVEL keeps your set at its highest efficiency.

J. C. CHRISTEN MFG. CO. 121 Dock St. - St. Louis, Mo. JOBBERS AND DEALERS:

WRITE FOR OUR PROPOSITION Insure your copy reaching you each month. abscribe to RADIO NEWS - \$2.50 a year, experimenter Publishing Co., 53 Park Pl., N.Y.C.

Set the potentiometer at mid position. By turning this to the right you should hear a strong click as the I.F. tubes go into oscil-lation. Slowly rotate the oscillator dial; if I.F. amplifier has gone out of oscillation. Rotate the loop tuning condenser dial very

tubes to their best operating point and move distance of the oscillation point. The potenstrength. Increase regeneration by means of just below oscillation. These two parts need never be touched when once set. if a new oscillator tube is used, the coupler

has found that distant stations can be pulled in very easily if the second detector tube is tated very slowly while tuning. A calibraspecified, is given on page 1430.

### The Experimenter's Own T. R. F. Set (Continued from page 1426)

When under certain conditions this set is made to operate as a regenerator, the adused as detector; but under regeneration consitive point without spilling over into oscil-When you build this set, do not expect to get the best of results immediately. It may take hours of adjusting and experiwe are quite sure that you will be more than pleased with its peculiar action. Operating



"SPARK INTERFERENCE"

# Eliminate Interference



SWEETENS RECEPTION INCREASES SELECTIVITY
CUTS DOWN STATIC

Can Be Used Anywhere-

Type IXL (large) . . \$4.00 Type BXL (small) . . 2.50 FISHWICK RADIO CO.



# RADIO TUBES

We Operate Our Own Laboratory

CHICAGO ELECTRIC DEVICES CO., 70 E. 22nd Street, Dept. 34, Chicago, III.

### Thirty Years in the Dark Room

(Continued from page 1421)

the dream of artificial daylight kept him from accepting. By this time wireless teleg-raphy had become practical in a sense and Moore himself had discovered a system for his light consisting of a low-voltage circuit superimposed upon a high-voltage one.

Contemplating wireless telegraphy and the current advances in this field caused Moore to revert at times to his earlier dream of

DEVELOPMENT OF THE MOORE LAMP In experimenting with vacuum-tube light

ing it was necessary to make literally thouands of models of all shapes and sizes. sands of models of all shapes and sizes. In consequence there was much popular confu-sion about what the "Moore Light" really was. Some referred to it as the largest single lamp ever made, 250 feet in length, and others as the smallest. Fig. 1 shows or describes only thirty-eight of these models, in various stages of development. Some of in various stages of development, some of indicate the dimensions of the lamps to which they refer. Some which might appear to be a foot or two in length, from the drawing, actually were a hundred times as long.

bulb. Some of the lamps developed before 1895 were supplied with a large plate elec-1895 were supplied with a large plate elec-trode and a small wire one. Moore noticed that these caused rectification of the al-ternating current supplied, but as he was interested in light, not rectification, he did not attempt to put this feature to practical use. It is remarkable, however, that he thus anticipated not only the Fleming valve, but

The vacuum vibrator method of supplying the tubes was simpler and more effective than either the mutction con or the trans-former methods, when alternating current was the source. But Moore discovered that when A.C. was used in a tube with two-plate electrodes both became luminous, an obvious advantage. He soon set about the

From the point of view of the radio public, it is interesting to find in Moore's notes the statement that current flows more the features of electron flow in vacuum tubes, now utilized in radio.

photograph of Chauncey Depew, which ap-peared in the March issue of Radio News,

In 1904 a carbon filament was combined an 1904 a carbon filament was combined with a large cup-electrode (see Fig. 1, No. 17). This circuit became one of more than one hundred patents issued to Moore, and is the foundation upon which all present day radio tubes, rectifiers, and low voltage X-ray tubes are based.

Previous to 1905 it had been commonly

# Bigger Radio Bargains Than Ever Before

# New 1926 Radio Guide Free A Message for Radio News Readers

OMETHING new has happened in the radio world. Readers of RADIO NEWS, Popular Radio, Radio Broadcast and other radio magazines know now that the revolution that has taken place in radio is a silent one, but nevertheless a decided one. The changes as represented by the new circuits, are really radical, despite the fact that they have not been heralded from the housetops. Hook-ups that represent the last word in long range, selectivity and tone clarity can now be built by anyone, so simple are these newer ideas. One dial control. one condenser, one changeable coil, with from four to six tubes, the most simple hook-ups imaginable, will give you radio reception such as you have only dreamed of but never heretofore realized. The New 1926 Barawik Radio Guide

(just out) will give you valuable and authentic information on the new developments. It will put before you radio's newest ideas and permit you to experiment and build the circuits that are now "the thing". To keep up with radio's newest ideas, you will need this new Barawik Radio Guide.

# RADIO'S NEWEST IDEAS

A free copy of this remarkable book is yours for the asking. Not only are these newer ideas explained

and illustrated, but you are given the opportunity of securing these standard guaranteed supplies at tremendous price reductions, at prices that represent huge savings to you in the construction, up-keep and perfection of your own radio set and those THIS COUPON that you will build.

## Fill in the Coupon Now for Your Free Copy

All that we ask is that you write with your name and address and, it be interested. Free copy will be sent you and your friends at once Write today—NOW.



BARAWIK CO., 102-142A So. Canal St., Chicago Send me my copy of your new Radio Catalog and Builder's Guide,

fortune in Itadio. Get complete training and sale plan Free! AMBU ENGINEERING INSTITUTE 2632 Prairie Awguse Div. 25 D Chicago, Illigole

RICHARDSON RADIO RECEIVERS Bring long distance home

# Yale GROUND DOUBLES POWER AND



# Two Great Radio Books, In One

### HOOKUPS

tical hook-ups, illustrated structional and non-techradio set builder and amateur.

### RADIO ENCYCLOPEDIA


Every issue contains an instalment of S. Gernsback's Radio Enevelodpedia. The first complete, au-Valuable to everyone in-

### CALL BOOK

This is a very valuable of Broadcast stations, Canadian stations and foreign broadcast stations. The most complete list of its kind. Each list arranged for logging stations with dial setting record blanks.

### RADIO LISTENERS INFORMATION

This section gives many hints and ideas on the care and operation of a receiving set, together with practical information on radio from the listener's point of view.

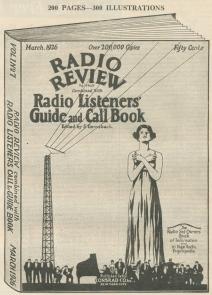

The Most Valuable Radio Book of its kind-for Beginners, SOLD ON ALL NEWSSTANDS

# Broadcast Listeners and Amateurs

Now the RADIO LISTENERS' GUIDE and CALL BOOK is combined with RADIO REVIEW and will be issued four times a year in one great complete volume. Each issue of this great new book contains a complete digest of practical radio hook-ups culled from radio press throughout the word. S. Gernsback's well known radio encyclopedia, in installments, an international radio press digest of news and ratio encyclopedia, in installments, an international radio press digest of news and information, a complete accurate list of Broadcast station call letters, and a valuable section replete with information for the Broadcast listener.

Published the the large Magazine six, contains 200 pages and more than 300 illustrations ALL POR VALUE of the Control of the Contro

Published and Distributed by The Consrad Co. Inc. 64 Church St. New York, N.Y. supposed that the ideal of cold light would be achieved by the use of some unique form of E.M.F. wave, caused by rapid current he was on the wrong track. He had prohe was on the wrong track. He had pro-duced by far the most practical means of obtaining rapid breaks with his vacuum vibrator, but the results were not satis-factory. So he determined to change his whole method, and try the effect of unaltered dynamic current. In six months he began to get positive results.

PROVING ITS PRACTICABILITY

The third dark room was the vault of the United States Patent Office, where he had

alternators which were to replace spark and coils, and then to the tubes distributed over the building. These were connected in building. parallel. Each had two external caps of each tube constituted a resonant circuit which deliver a wave of about 36,000 meters. In-deed, Moore advised several prominent radio and take up the high-frequency alternator

ment. Compared with the ornate fixtures that were the rule in ordinary carbon lamp lighting at the time, this room makes an

By 1906 other inventors had learned of vacuum tubes. Moore had repeatedly suggested the possibility of their use in wireless. One of the objections, most frequently

THE "BREATHING TUBE" Fig. 4 shows the mechanism of the valve, carbon welded into the wall of the tube, and ly this is covered by mercury and admits no gas, but when the current flowing through the tube changes from the normal value, indicating a change in gas pressure,

# Within Reach of All



### ELIMINATO FERBEND

# Superior Results!

Wave Trab

Now you can get permanentandefficient "B" current supply direct from your electric light socket at a price

than new batteries. Ferbend has succeeded in combining results with first-cost economy, for your benefit. Equip your set NOW with this wonderful new instru-

ment and be convinced. Ask Your Dealer or Send Direct If you prefer, we will make shipment direct to you upon receipt of price, or C.O.D. if desired. Remember, superior

results are guaranteed or your money back, USE THE COUPON NOW! FERBEND ELECTRIC CO.

425 W. Superior St.,

# Ferbend Maxmin

# FAHNESTOCK CLIPS



FAHNESTOCK Connectors are used by nearly every manufac-turer of standard radio sets and manufacturers sets and manufactured of high grade "A" and "B" Batteries. FAHNE-

"THE IDEAL CONNECTOR"

FAHNESTOCK ELECTRIC COMPANY

Operates at a maximum efficiency at all times. Noiseless-no hum. Taps at 221/2-45-90 volts.

Maximum voltage, 100, (for 135 volts, simply add a 45 volt "B" battery.)

A. C. model gives Full Wave Rectification. Cost of operation less than 50c a year. Lasts indefinitely.

All parts are specially designed and manufactured by us for this purpose only.

Unconditionally Guaranteed to be equal or superior to any Eliminator on the market, regardless of price.

Ferbend Electric Co. 425 W. Superior St., Chicago ☐ Send at once. Payment enclosed. □ Send A. C. Model. □ Send D.C. Model.

"They Satisfy Loud pleasing tone. Handsome material Distinctive design. Horns \$22.50 to \$30.00 Units \$10.00 to \$12.00

American Electric Co. State & 64th Sts.

Insure your copy reaching you each month. Subscribe to Radio News-\$2.50 a year. Experimenter Publishing Co., 53 Park Place, N. Y. C



7 x 18" Beautiful Wooden Cabinet

It's 5-Tube

GOLD MEDAL TUNED RADIO FREQUENCY

RECEIVER

Was \$60

# NOW

Satisfaction Guaranteed

Delivered free anywhere in the United States

Agents, Dealers, Distributors Wanted

**GOLD MEDAL RADIO** 1032 Longwood Avenue New York City



Storage Radio A Battery

.00

Solid Rubber Case

WORLD BATTERY CO.



BARAWIK CO., 192-145 So Canal St., Chienge, U. S. A.

the electro-magnet is energized, lowering the caused some wag to call it "the breathing tube." The title is an apt one, as the tube

working at the time with his famous "in-verted tomato can" over a gas flame. He soon found that the vacuum regulator was unnecessary in his work. The great tube which Moore had installed in the Garden was 186 feet in length, and

had been. It was the most triumphan demonstration to date of the value of the

Electric Light Association in 1896, he had Garden.

THE LONG TUBE COMMERCIALIZED

This tube marked the entry of a practical commercial model. All vibrators had been eliminated. The tube was operated direct in a steel box. Both of the terminal electrodes of the large tube were concealed tube. The instant it was broken the cur-

Soon the long-tube installations became commonplace. One could ride on a Broadof unsatisfactory yellow light from the old

Some amusing incidents are part of the history of long-tube installations. During a tube, thought it good to eat, and proceeded to take a bite. The resulting explosion was

dioxide and placed on the ceilings of the color-matching rooms of the great textile plants of the country, they emancipated ownTo the Man with an Idea

citemia as to promote patternousing, before they go to any expense. Booklet of valuable information and form for properly disclos-ing your idea free on request. Write today.

RICHARD B. OWEN PATENT LAWYER 2 Owen Building, Washington, D. C.

### SEND FOR YOUR FREE COPY TESTED HOOK-UPS Submitted By Users of Our

Wonderful transmitter Butten for loud speakers. Amplifica-Price \$1.00 Postpaid with In-

K. Electric Co., 15 Park Row, New York

McGil Bldg., Wash., D. C. Patents, Trade Marks, Copyrights, Patent Litigation



The New Magazine of Novels and Stories with a Scientific Touch

> See Full Page Ad This Issue

ers forever from the tyramny of night and of dark days. The world at last had a sandard of color values, and the Moore tube pose. The creation of this lamp gave Moore much satisfaction, for he remembered an when he had confided to the grant inventor his dream of producing, some day, a light the model of the producing some day, a light the matter with my light?" Edition asked. "It's too small, too red, and too hot," Moore the matter with my light?" Edition asked. "It's too small, too red, and too hot," Moore in the producing single printing and his dream had come true.

Fig. 5 shows one of the earliest colormatching installations, in the plant of the Weidmann Silk Company, at Paterson, N. J. In the illustration Mr. Weidmann, the cocentric millionaire, is shown wearing the wooden shoes which he persisted in affecting during his whole lifetime.

### SUCCESS ATTAINED

Much of Moore's success was due to leadership. He was able to hold the admiration of his employes, and many of them remained with him for years, later achieving their own reputations as scientists. To Messrs. Warner and Porter, Moore gives special praise and commendation.

The Madion Square Garden installation started a period of financial success and expansion which continued for some time. Offices were opened in New York City, and were visited by the foremost engineers with the Company of the Compa

Moore soon extended his early idea of electric writing to electric script, using his long, narrow tubes. Broadway was soon flanked with a double line of signs, such as that shown in the accompanying illustration of the front of the World building.

The success of the American installations caused the formation of many foreign companies for the development of the Moore light, and created an international demand for "glass plumbers." Over a dozen were sent abroad to educate the foreign workers.


Thus was reached the height of development of this particular invention, Moore's most of the particular invention, Moore's place in the bistory of scientific development, and has been supereded by the smaller and day use. It is still invaluable as a source of pure white light; and is widely used in one of the particular properties of the properties. The present efficiency of timpaten lamps is the properties of the properties of the properties of the properties and the luminosity of gazes seems to offer a promising path for future experiment.

An article entitled "Controlling Power and Motion by Radio" appeared in the March issue of RADIO NEWS.

Due to an unfortunate error, an acknowledgment which should have been published in that issue was omitted. Much of the material in our article was based upon Mr.

B. F. Meissner's book "Radiodynamics," the

The Editor regrets the omission and takes this opportunity to acknowledge the source from which many of the facts presented in our article were drawn.



# The Benjamin A REAL Straight-Line Frequency Condenser

Logs evenly over the sweep of the dial in exact ratio with the broadcasting frequency steps. Eliminates bunching of stations and increases selectivity and sensitivity. No body capacity effects and no absorption losses. A beautiful instrument in unpolished silver plate, made with the precision of a watch, to last a lifetime. \*\*

Benjamin
Cle-Ra-Tone Sockets

Stop tube noises by preventing the transmission of outcack or barriers and the transmission of outcack or board and the transmission of outcack or board and aborb all shocks and jars. The new "Push" type Cle-Ra-Tone Sockets are for standard UX and WX tubes.

nic disturbsupport the
over the base
ks and jars.

pe Cle-Raor standard

dielectric construction. The highest type of inductance, Sinaly

dielectricconstruction. The high dest type of inductance. Single and in sets of three. bers and Dealers Everywher

Benjamin Tuned Radio

Frequency Transformers

Improvement in tone, volume and selectivity. Low Resistance.

Sold through Radio Jobbers and Dealers Everywhere
Send for full information on these and other Benjamin
Radio Products. Address our neavest office

Benjamin Electric Mfg. Co.

Benjamin Electric Mfg. Co. 120-128 S. Sangamon Street, Chicago

247 West 17th Street, New York

448 Bryant Street, San Francisc

Manufactured in Canada by the Benjamin Electric Mfg. Co., of Canada, Ltd., Toronto, Ontario

EARN RADIO

designers, inspectors. Unlimited, fascinating opportunities on land of sea

WILL YOU AT HOME BY A RADIO EXPERT
Under my practical, easy to understand, instruction—you qualify in an amazingly short time. No previous experience is necessary. Every branch of

radio becomes an open book to you, You learn how to design, construct, operate, repair, maintain and sell all forms of Radio apparatus, My methods are the latest and most modern in existence.

FREE Ween's to the latest design. Write Today "Radio FREE

A. G. Mohaupt, Radio Engineer, RADIO ASSOCIATION OF AMERICA, Doot 3944 4513

Crystal-Dealers or Direct. 5560 Jackson Blvd., Chicago

DETECTOR TOUBLE climator—ALWAYS LIVE

CRYSTAL

SI

DETECTOR TOUBLE climator—ALWAYS LIVE

ST

DETECTOR

DETECTOR

DETECTOR

SI

DETECTOR

PREE RADIO GUIDE

NEW EST 1820 EDITION

NEW EST 1820 EDITION

To a startingly low prices. Get

Parter by one there for an drugible.

The best in parts, kits, sets and supplies.

Outers filled same day received. Write
for free cory NOW; also please send names of one or nor
radio fun.

BARAWIK CO., 102-165 Se Canal St., Chicago, U. S. A.

Insure your copy reaching you each month. Subscribe to Radio News-\$2.50 a year Experimenter Publishing Co., 53 Park Place, N. Y. C.

# 

Classified advertising rate twenty-two cents a word for each insertion. Ten per cent discount for 6 issues, 20 per cent discount for 12 issues. Name and address must be included at the above rate. Cash should accompany all classified advertisements unless placed by an accredited advertising agency. No advertisement for less than 10 words accepted. Objectionable or misleading advertisements not accepted. Advertisements for the June issue must reach us not later than April 1st.

CIRCULATION LARGER THAN THAT OF ANY OTHER RADIO PUBLICATION

## Agents Wanted

Big Meney and fast sales. Every corner burs gold hitlain for his auto. You charge \$1.50; make \$1.55. Ten-ders daily easy. Write for particulars and free samples, merican Menegram Co., Dept. 123, East Orange, N. 4.

To Sell the Radio Fone Lamp Loud Speaker, Latest ra o reception reproducer, Write for sample entitl. Radii thin Sample, 1002 Gibbon Street, Pittsburgh, Pa

### Architecture School

### Aviation

Boys-Get a three-foot madel accoplane free. Write to

### Builders School

Become a Builder.

### Rusiness Opportunities

Responsible manufacturer wants competent men to manage fre and salesmen. \$100 to \$1500 necessary; will allow ex-most to Trenton if you quility. Address Manager, 534 rest Richey Bidg., Trenton, N. J.

## Chemistry

# EXPERIMENTER PUBLISHING CO. INC., 53 Park Place, New York, N. Y.

### Helo Wanted

Quality for \$150-\$330 milroud jato. Fireman, B. Bargageman, Sheeping Car or Trein Porter, 237 Bureau, East St. Louis, III.

### Incorporations

### Insects Wanted

### Instruction

### Miscellaneous

### Motion Pictures

Films for Tey Markines. Hart—Mix-Chaplin, Co-ories 1009 feet \$3.50. Special 200 foot lengths \$1.50 ids. Big Boys list Free. Menarch Films, Departm emphis, Fen.

### Motorcycles, Bicycles

Den't Buy a Bleyels Meter Attachment until you ge our catalog and prices. Shaw Mig. Co., Dept. 6, Galestere

### Musical

### Old Coins

### Old Money Wanted

\$2 to \$500 each paid for hundreds of Old or Old Keep all old money, it may be very valuable. Send New Illustrated Code Value Book, 438. Gagranteed Get posted. We pay Cash. Clarke Coin Company, 14 Lesker, W. 1

### Patent Attorneys

Patents. Send drawing or model for examination an report as to patentiability. Advice and booklet free. High exit references. Best requits. Promptees assured Watson E. Coleman, Patent Lawyer, 644 G Street, N. W.

Patents-My fee in installments. Free personal advice, rank T. Fuller, Washington, D. C.

Patents—Send for form "Evidence of Conception" to I signed and witnessed. Form, fee schedule, information fre Lancaster and Allwine, Repixtered Patent Attorneys Emited States and Camada, 250 Ouray Big., Washington

Patent-Sense—As one of the oldest firms in America tre give inventors, at lowest consistent charge, a service nated for results, evidenced by many well-known Patents of extraordinary value. Heek, Patent-Sense, free, Lacey & Lacey, 621 P St., Washington, D. C. Estab. 1899.

### Patents

Inventions Commercialized. Patented or unpatented Write Adam Pisher Mfg, Co., 278 Euright, St. Louis,

### Personal

### Printing Outfits and Supplies

Print your ewn cards, stationery, circulars, paper empired estifics \$8.50; Joh Presses \$12, \$255; Rolary yint for others, bir profit. All easy, rules sent, or canalog presses, type, paper, etc. Press Company, legislers. Ourself, page 1.

### Radio

No More Batteries. Build your own B Battery Elimin or. Blucyrints \$1.00 plus postage stamp, Chas. Komunick! id E. 17th Sc., New York City. Build a Lifetime "B" Battery. Use better Edison ele-ments, welded connections, at 7 cents pair. Sample cell 10 cents. Peal Mills, Washing, Orecom.

Atwater-Kent, Crosley, Fada, five tube receivers, spiers, Uniposeer Balkite eliminators, Bargaine, Mention y wants, Write today, Garpett Simmy, Lake, New York

Radio Fans wanted to sell standard radio apparatus. H. A. Roberta & Co., 180 Breadway, New York Circ.

### Salesmen Wanted

# Step into the limelight!



## Surprise your friends with a Mastery of Mystery

Be the popular man in your circle of friends. You can entertain them and hold their attention with a thousand surprises and novelties.

POPULAR MAGIC contains thousands of POPULAR MAGIC contains thousands of simple, entertaining parlor tricks, as many puzzling magical stunts and a whole book full of mystic spirit novelities that you can entertain your friends with. A new set of tricks for every day of the year. Compiled from the great mag-azine "SCIENCE AND INVENTION."

GET THIS GREAT BOOK TODAY. Check full of tricks, Novelties, Mystic performances, Master sleights-of-hand, Gags, Disappearing acts. All kinds of fun. Buy a copy or order direct.

## PRICE 50c

Compiled by the Staff of SCIENCE and INVENTION under the direction of Prof. DUNNINGER the man who mystified the Prince of Wales, Ex-Presidents Harding, Taft, Roosevelt, President Cool-idge and other celebrities.

Large Size Book 9x12 inches. 112 Pages-Hundreds of Illustrations

Sold by All Newsdealers

Published and Distributed by EXPERIMENTER PUBLISHING Co.,

53 Park Place New York, N. Y.

# Salesmen Wanted (Continued)

Scenery to Rent

School of Electricity

Song Poems

Song Writers

Sangariters: Let no furnish the music for your somes gearanteeing you obsclute satisfaction. Copyrights secured. Submit your scripts for estimate and free advice. Walter W. Newcomer, 1674 Branchay, New York.

Stammerine

Telegraphy

Telegraphy-Both Morse and Wireless taught thor

Wanted to Buy

Full Value Pald for Od Gold, Jevelry, Watches, Dia-cods, crowns, bridges, denda jedd, after, platinum, gold sibrer ore; imancéo polata, old false tech. Packages re-rende if our offer is nee staffscherry. Dialog State Smit-ig Works (The Odd Reliable) 29 So. State St., Dept. 6, Chicato, Ili.



Special Library of Information

RADIO PATENTS and TRADE MARKS

JOHN B. BRADY

Patent Lawyer Ouray Building Washington, D. C.

Cable address:

Main 4806

## - Just Out!

# Silver-Cockaday S-C Receiver

Described in March "Popular Radio" Single Control-4 Tubes-Most Up-to-Date of All Circuits. Completely Assembled Harness Assures Easy Wiring.

# The Specified Parts

S-M No. 316 .00035 Condensers @ \$5.75
" No. 515 Ceil Sockets @ \$1.00......
" No. 801 Vernier Dial No. 351 Versier Dial
No. 119A Cail
No. 114A Cail
No. 510 Tube Sackets @ 50c.
No. 340 Confessor—000025
No. 340 Muuting Brackets (pr.) Yaxley No. 16K 6 chm Rheostat...

No 1 Joek

No. 2 Jark

No. 10 Switch Palymet .03015 Condenser with grid leak elips.

TOTAL SER SE

I Serew Assertment ..... Send for "The Key to The Silver-Cockaday Receiper." Price 25c postonid.

WHOLESALE

15 East 40th Street, New York City

## Every Radio Fan should have this book JUST OUT-514 PAGES

HARRY F. DART, E.E. HARRY F. DART, E.E.
Formerly with the Western
Electric Ca., and U. S. Army
Instructor of RadioTechnically edited by
F. H. Deane
NO MORE need you turn
from book to book,
hoping to find what you
want. It is all here, in

language, by entineers for I EXPAJINS: Electrical space, 100,000 sold. In IXFAJINS: Electrical space, 100,000 sold. In IXFAJINS: Electrical space, 100,000 sold. In IXFAJINS: Electrical space, 100,000 sold. IXFAJINS: Electrical space, 100,00

International Correspondence Schools

Box SESS-G, Scramber, Penna.

I cocked one Dellar. Please and memper-paid
the 21-topen Dellar. B. Hadde Handbook. It is
understood that if I am not cuttledy satisface I may
return this book within five days and you will
return money.

64 Illustrated Pages of Radio Bargains! Write for Catalog Today RANDOLPH RADIO CORP.





MAGNATRONS



RCA Loudspeaker